


Dot 1100



Design: Foster + Partners, 2015



Suspended lamp for indirect lighting with integrated LED source and diffused light optic system.
Aluminium structure with steel matt-painted reflector.
1-10V dimming or DALI dimming available.

Finishing

Standard

Special



Anodised black
cod. 132DL01X000



Anodised brass
cod. 132DL50X000

All RAL coating and galvanic finishes available upon request

Light emission



- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 4750 lm
- Emitted flux: 2020 lm
- Efficacy: 38 lm/W
- CCT: 3000K
- CRI index: 83
- LLMF: 50000 h L70

Electrical Facts

- Source power: 52 W
- Power absorption: 54 W
- Stand-by absorption: < 2 W
- Grid voltage: 110 - 240 V AC / 50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 15,5 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

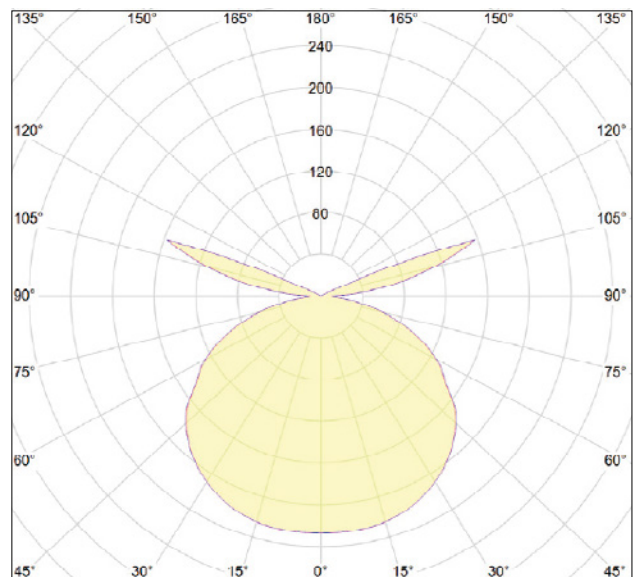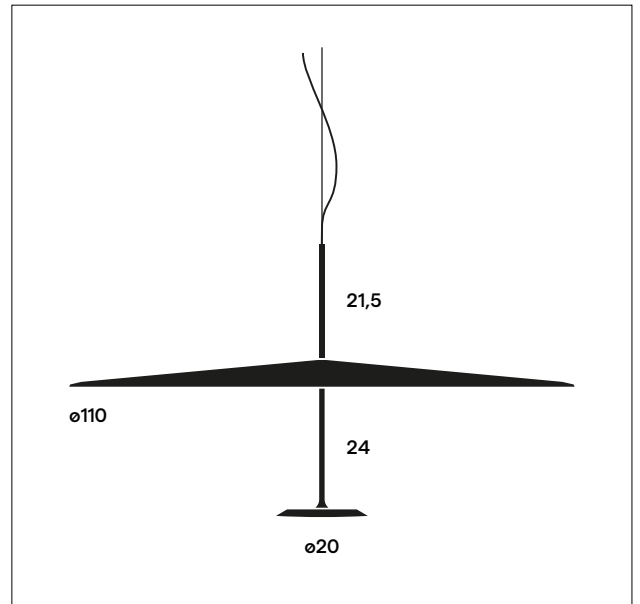


Packaging
cardboard box
118 x 118 x 35 (cm)
0,56 m³

Gross weight
25 Kg

Dot 1100



Design: Foster + Partners, 2015



Suspended lamp for indirect lighting with integrated LED source and diffused light optic system.
Aluminium structure with steel matt-painted reflector.
1-10V dimming or DALI dimming available.

Finishing

Standard

Special



Anodised black
cod. 132DL01XOK27



Anodised brass
cod. 132DL50XOK27

All RAL coating and galvanic finishes available upon request

Light emission



- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 4570 lm
- Emitted flux: 1950 lm
- Efficacy: 36 lm/W
- CCT: 2700K
- CRI index: 83
- LLMF: 50000 h L70

Electrical Facts

- Source power: 52 W
- Power absorption: 54 W
- Stand-by absorption: < 2 W
- Grid voltage: 110 - 240 V AC / 50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 15,5 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

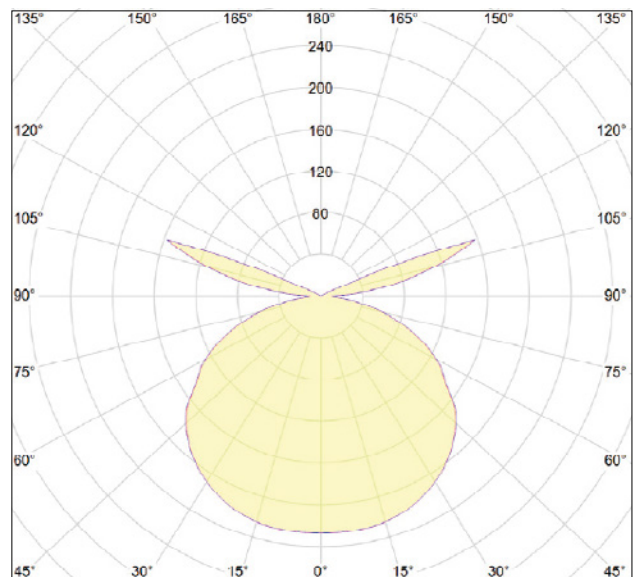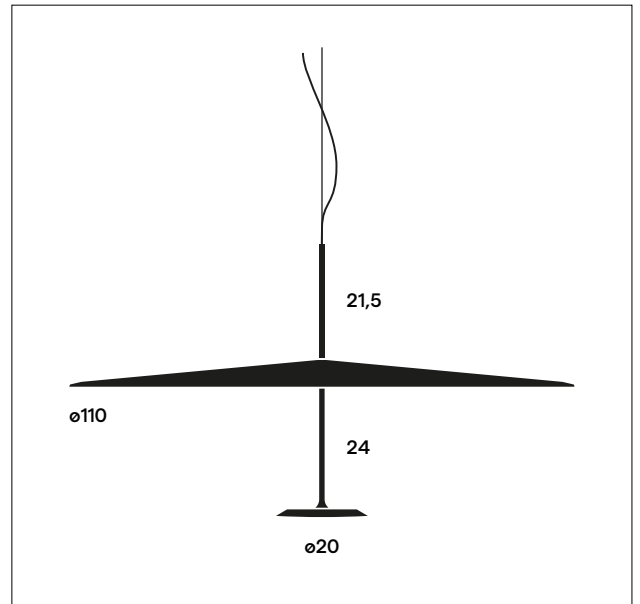

Packaging
cardboard box
118 x 118 x 35 (cm)
0,56 m³

Gross weight
25 Kg