



ø 17
Super Comfort



ø 25
Super Comfort



ø 38
Comfort



ø 59
Super Comfort



ø 75
Super Comfort



ø 59
Super Comfort



ø 75
Super Comfort



ø 59
Comfort



ø 75
Comfort





Explore and interact with products in 3D.
thelightexperience.iguzzini.com




- Flush-mount installation on false ceilings of thickness 12.5 to 25 mm for Minimal versions (without perimeter flap) or 1 to 25 mm for Frame versions (with flap) using steel wire springs.
- Frame and heat sink in die-cast aluminium.
- Reflector in metallic-finish thermoplastic material with scratch protection for excellent lighting efficiency and visual comfort.
- Controlled luminance emissions, UGR<13 comfort and UGR<10 super comfort versions.
- Available with on-off wiring and dimmable versions.
- The minimum installation space dimensions are listed in the online instruction catalogue.
- IP20
- IP44 on the visible body of the mount after installation.



Compact dimensions


IP65 version

Optics

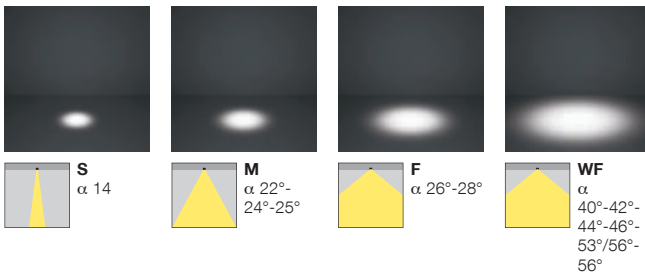

Accessories


The accessories allow the features of the lighting produced by the single luminaire to be altered, for highly professional lighting effects. The combination of filters allows the chromatic characteristics of the source to be modified in order to enhance illuminated objects or settings.

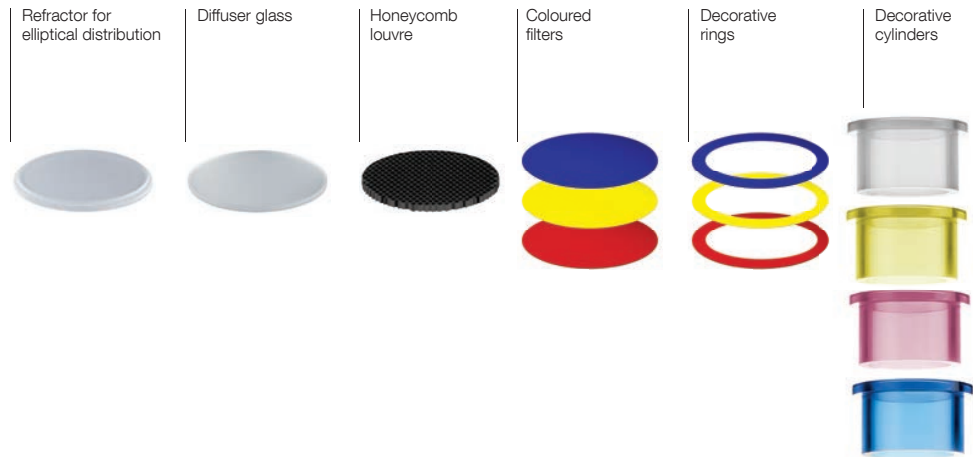

Visual comfort UGR<13

Light must be agreeable and never aggressive. The new Laser optics achieve UGR<13, a much lower value

than the limits recommended by the standards to avoid glare.

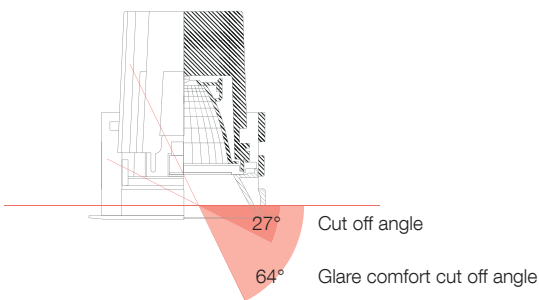

Warm dimming

Halogen functionality with LED technology. When luminous intensity drops to 5%, colour temperature

warms up slowly from 2700K to 1800K using only one control channel.



Laser fixed



iguzzini.com code finder / download design files / save and organize favorites


new
Available from September

* available on request




source		system		optic	code	colour
W	lm	W	lm			
Frame version - ø17 - Super Comfort						
LED						
4000K - CRI 80						
1,4W	180	1,4W	103	14°	P303	01-43-47
2700K - CRI 90						
1,4W	130	1,4W	74	14°	P304	01-43-47

Power supply to be ordered separately




source		system		optic	code	colour
W	lm	W	lm			
Minimal version - ø17 - Super Comfort						
LED						
4000K - CRI 80						
1,4W	180	1,4W	103	14°	P305	01-04
2700K - CRI 90						
1,4W	130	1,4W	74	14°	P306	01-04

Power supply to be ordered separately




source		system		optic	code	colour
W	lm	W	lm			
Frame version - ø25 - Super Comfort						
LED						
4000K - CRI 80						
2W	240	2W	154	14°	P307	01-43-47
2700K - CRI 90						
2W	170	2W	109	14°	P309	01-43-47

Power supply to be ordered separately




source		system		optic	code	colour
W	lm	W	lm			
Minimal version - ø25 - Super Comfort						
LED						
4000K - CRI 80						
2W	240	2W	154	14°	P311	01-04
2700K - CRI 90						
2W	170	2W	109	14°	P313	01-04

Power supply to be ordered separately



source		system		optic	code	colour
W	lm	W	lm			
Frame version - ø38 - Comfort						
LED						
4000K - CRI 90						
-	430	-	-	25°	QY54	01-43-47
10W	430	-	-	42°	QY55	01-43-47
3000K - CRI 90						
10W	430	-	-	25°	QY52	01-43-47
10W	430	-	-	42°	QY53	01-43-47
2700K - CRI 90						
-	430	-	-	25°	QY50	01-43-47
10W	430	-	-	42°	QY51	01-43-47

Power supply to be ordered separately




source		system		optic	code	colour
W	lm	W	lm			
Minimal version - ø38 - Comfort						
LED						
3000K - CRI 90						
7,5W	750	7,5W	578	24°	QA48	01-04
7,5W	750	7,5W	570	40°	QA49	01-04
2700K - CRI 90						
7,5W	710	7,5W	547	24°	QA46	01-04
7,5W	710	7,5W	540	40°	QA47	01-04

Power supply to be ordered separately




source		system		optic	code	colour
W	lm	W	lm			
Frame version - ø59 - Super Comfort						
LED						
3000K - CRI 90						
7,5W	750	7,5W	578	24°	P321	01-43-47
7,5W	750	7,5W	570	40°	P322	01-43-47
2700K - CRI 90						
7,5W	710	7,5W	547	24°	P319	01-43-47
7,5W	710	7,5W	540	40°	P320	01-43-47


Power supply to be ordered separately




source		system		optic	code	colour
W	lm	W	lm			
Minimal version - ø59 - Super Comfort						
LED						
3000K - CRI 90						
7,5W	750	7,5W	578	24°	QA48	01-04
7,5W	750	7,5W	570	40°	QA49	01-04
2700K - CRI 90						
7,5W	710	7,5W	547	24°	QA46	01-04
7,5W	710	7,5W	540	40°	QA47	01-04

Power supply to be ordered separately
To install minimal products a QA80 flange is required



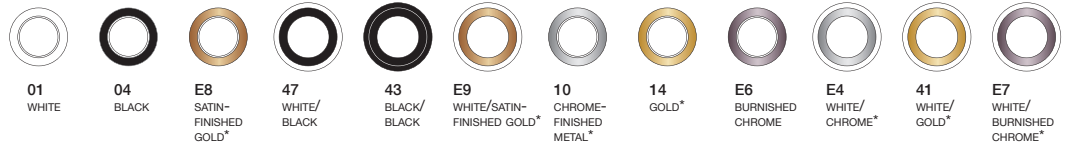


source		system		optic	code	colour
W	lm	W	lm			
Frame version - ø75 - Super Comfort						
LED						
3000K - CRI 90						
10W	1200	10W	910	26°	P350	01-43-47
10W	1200	10W	947	44°	P351	01-43-47
10W	1200	10W	960	56°	Q810	01-43-47
2700K - CRI 90						
10W	1150	10W	873	26°	P348	01-43-47
10W	1150	10W	907	44°	P349	01-43-47
10W	1150	10W	920	56°	Q809	01-43-47
Warm Dimming - CRI 90						
10W	650	10W	540	28°	P352	01-43-47
10W	650	10W	540	46°	P353	01-43-47
10W	640	10W	538	53° / 56°	Q811	01-43-47



Warm dimming: 1800K÷2700K.
Power supply to be ordered separately.
The power supply with code MY19 must be ordered separately for Warm dimming versions.




source		system		optic	code	colour
W	lm	W	lm			
Minimal version - ø75 - Super Comfort						
LED						
3000K - CRI 90						
10W	1200	10W	910	26°	QA57	01-04
10W	1200	10W	947	44°	QA58	01-04
10W	1200	10W	960	56°	QA59	01-04
2700K - CRI 90						
10W	1150	10W	873	26°	QA54	01-04
10W	1150	10W	907	44°	QA55	01-04
10W	1150	10W	920	56°	QA56	01-04
Warm Dimming - CRI 90						
10W	650	10W	540	28°	QA60	01-04
10W	650	10W	540	46°	QA61	01-04
10W	640	10W	538	53° / 56°	QA62	01-04



Power supply to be ordered separately.
The power supply with code MY19 must be ordered separately for Warm dimming versions.
To install minimal products a QA82 flange is required.




source		system		optic	code	colour
W	lm	W	lm			
Frame version - 59x59 - Super Comfort						
LED						
3000K - CRI 90						
7,4W	750	7,4W	435	24°	P335	01-43-47
7,4W	750	7,4W	449	42°	P336	01-43-47
2700K - CRI 90						
7,4W	710	7,4W	412	24°	P333	01-43-47
7,4W	710	7,4W	425	42°	P334	01-43-47



Power supply to be ordered separately




source		system		optic	code	colour
W	lm	W	lm			
Minimal version - 59x59 - Super Comfort						
LED						
3000K - CRI 90						
7,4W	750	7,4W	435	24°	QA52	01-04
7,4W	750	7,4W	449	42°	QA53	01-04
2700K - CRI 90						
7,4W	710	7,4W	412	24°	QA50	01-04
7,4W	710	7,4W	425	42°	QA51	01-04



Power supply to be ordered separately
To install minimal products a QA81 flange is required




source		system		optic	code	colour
W	lm	W	lm			
Frame version - 75x75 - Super Comfort						
LED						
3000K - CRI 90						
10W	1200	10W	708	28°	P389	01-43-47
10W	1200	10W	803	42°	P390	01-43-47
10W	1200	10W	972	56°	Q816	01-43-47
2700K - CRI 90						
10W	1150	10W	679	28°	P387	01-43-47
10W	1150	10W	770	42°	P388	01-43-47
10W	1150	10W	932	56°	Q815	01-43-47



Power supply to be ordered separately



source		system		optic	code	colour
W	lm	W	lm			
Minimal version - 75x75 - Super Comfort						
LED						
3000K - CRI 90						
10W	1200	10W	708	28°	QA75	01-04
10W	1200	10W	803	42°	QA76	01-04
10W	1200	10W	972	56°	QA77	01-04
2700K - CRI 90						
10W	1150	10W	679	28°	QA72	01-04
10W	1150	10W	770	42°	QA73	01-04
10W	1150	10W	932	56°	QA74	01-04



Power supply to be ordered separately
To install minimal products a QA83 flange is required

For Warm dimming versions, use the power supply unit code MY19 to be ordered separately.

Class III product performances are assured only when using the electronic power supplies and drivers indicated in the catalogue.

For missing watt and lumens values consult iguzzini.com - Technical information may change alongside technological progress. Consult iguzzini.com for ongoing updates.

Laser fixed




iguzzini.com code finder / download design files / save and organize favorites


* available on request



source		system		optic	code	colour
W	lm	W	lm			
Frame version - ø59 - Comfort						
LED						
3000K - CRI 90						
7,5W	750	7,5W	593	22°	P317	01-43-47
7,5W	750	7,5W	578	40°	P318	01-43-47
2700K - CRI 90						
7,5W	710	7,5W	561	22°	P315	01-43-47
7,5W	710	7,5W	547	40°	P316	01-43-47



source		system		optic	code	colour
W	lm	W	lm			
Frame version - ø75 - Comfort						
LED						
3000K - CRI 90						
10W	1200	10W	946	26°	P344	01-43-47
10W	1200	10W	971	46°	P345	01-43-47
10W	1200	10W	972	56°	Q807	01-43-47
2700K - CRI 90						
10W	1150	10W	907	26°	P341	01-43-47
10W	1150	10W	930	46°	P342	01-43-47
10W	1150	10W	930	46°	P343	01-43-47
10W	1150	10W	932	56°	Q806	01-43-47
Warm Dimming - CRI 90						
10W	650	10W	546	30°	P346	01-43-47
10W	650	10W	566	44°	P347	01-43-47
10W	640	10W	550	58°	Q808	01-43-47



Power supply to be ordered separately

P343: IP65
Power supply to be ordered separately.
The power supply with code MY19 must be ordered separately for Warm dimming versions.

For Warm dimming versions, use the power supply unit code MY19 to be ordered separately.


























Decorative accessories		code	colour	code	colour	code	colour	code	colour	code	colour
	Decorative rings	---	---	---	---	MY26	05-06-16	MY15	05-06-16	MY26	05-06-16
	Decorative cylinders	---	---	---	---	---	---	MY17	05-06-16-24	MY28	05-06-16-24

















Optical accessories		code	colour	code	colour	code	colour	code	colour	code	colour
	Honeycomb louvre	---	---	---	---	MY22	04	MY11	04	MY22	04
	diffuser glass	---	---	---	---	MY23	65	MY12	65	MY23	65
	Refractor for elliptical distribution	---	---	---	---	---	---	MY13	24	---	---
	medium	---	---	---	---	MY24	24	---	---	MY24	24
	Coloured filters	---	---	---	---	MY25	05-06-16	MY14	05-06-16	MY25	05-06-16

Class III product performances are assured only when using the electronic power supplies and drivers indicated in the catalogue.

Technical information may change alongside technological progress. Consult iguzzini.com for ongoing updates.

					
Mounting accessories	code colour	code colour	code colour	code colour	code colour
 Minimal square flange	--- ---	--- ---	--- ---	QA81 01 For recessed 59x59 mm version	QA83 01 For recessed 75x75 mm version
 Minimal circular flange	--- ---	--- ---	--- ---	QA80 01 For recessed Ø 59 mm version	QA82 01 For recessed Ø 75 mm version
 Minimal circular flange	--- ---	--- ---	--- ---	PA21 01 For recessed Ø 59 mm version	PA22 01 For recessed Ø 75 mm version
					
Power supply	code colour	code colour	code colour	code colour	code colour
 Constant current power supply unit non dimmable IP20 15W VIN = 220-240VAC 50/60Hz Ø59	--- ---	--- ---	--- ---	MY10 00	--- ---
 Constant current power supply unit non dimmable IP20 17W	--- ---	MXF9 00	--- ---	--- ---	--- ---
 Constant current power supply unit non dimmable IP20 20W VIN = 110-240VAC 50/60Hz Ø17	PA70 00	PA76 00	MY37 00 PA85 00	--- ---	MY37 00 PA85 00
 Constant current power supply unit non dimmable IP20 20W VIN = 110-240VAC 50/60Hz Ø17	MY03 00	--- ---	--- ---	--- ---	--- ---
 Constant current power supply unit 1-10V IP20 14.5W VIN = 220-240VAC 50/60Hz Ø59	--- ---	--- ---	--- ---	MY07 00	--- ---
 Constant current power supply unit 1-10V IP20 16W VIN = 220-240VAC 50/60Hz Ø75	--- ---	--- ---	MY18 00	--- ---	MY18 00
 Constant current power supply unit 1-10V IP20 35W VIN = 110-240VAC 50/60Hz Ø17	MY04 00	--- ---	--- ---	--- ---	--- ---
 Constant current power supply unit 1-10V IP20 50W VIN = 110-240VAC 50/60Hz Ø25	--- ---	MY83 00	--- ---	--- ---	--- ---
 Constant current power supply unit DALI IP20 12W VIN = 110-240VAC 50/60Hz Ø59	--- ---	--- ---	--- ---	PA81 00	--- ---
 Constant current power supply unit DALI IP20 12W VIN = 220-240VAC 50/60Hz Ø59	--- ---	--- ---	--- ---	MY08 00	--- ---

Laser fixed

	 ø17		 ø25		 ø38		 ø59 59x59		 ø75 75x75	
Power supply	code	colour	code	colour	code	colour	code	colour	code	colour
 Constant current power supply unit DALI IP20 20W VIN = 110-240VAC 50/60Hz	---	---	---	---	PA83	00	---	---	PA83	00
	---	---	---	---	MY19	00	---	---	MY19	00
 Constant current power supply unit DALI IP20 35W VIN = 110-240VAC 50/60Hz ø17	MY05	00	---	---	---	---	---	---	---	---
	PA72	00	---	---	---	---	---	---	---	---
 Constant current power supply DALI IP20 50W VIN = 220-240VAC 50/60Hz Iout = 350÷1050mA dimensions: 125x80x22	---	---	PA77	00	---	---	---	---	---	---
	---	---	BZM4	00	---	---	---	---	---	---
 Constant current power supply unit IGBT + TRIAC IP20 10W VIN = 220-240VAC 50/60Hz ø59	---	---	---	---	---	---	MY09	00	---	---
	---	---	---	---	---	---	---	---	---	---
 Constant current power supply unit IGBT + TRIAC IP20 12W VIN = 220-240VAC 50/60Hz ø75	---	---	---	---	MY20	00	---	---	MY20	00
	---	---	---	---	---	---	---	---	---	---
 Constant current power supply unit IGBT + TRIAC IP20 14W VIN = 110-240VAC 50/60Hz ø25	---	---	MY84	00	---	---	---	---	---	---
	---	---	---	---	---	---	---	---	---	---
 Constant current power supply unit IGBT + TRIAC IP20 15W VIN = 110-240VAC 50/60Hz ø17	MY06	00	---	---	---	---	---	---	---	---
	---	---	---	---	---	---	---	---	---	---
 Constant current power supply unit DALI IP20 10W VIN = 110-240VAC 50/60Hz	---	---	---	---	---	---	PA79	00	---	---
	---	---	---	---	MY21	00	MY36	00	MY21	00
 Emergency kit	---	---	---	---	MY21	00	MY36	00	MY21	00

For the number of products that can be connected, refer to the instruction sheet

