

# Laser


## Wall Washer



ø 75  
Comfort



∅ 75  
Comfort




Explore and interact with products in 3D.  
[thelightexperience.iguzzini.com](http://thelightexperience.iguzzini.com)



- Flush-mount installation on false ceilings of thickness 12.5 to 25 mm for Minimal versions (without perimeter flap) or 1 to 25 mm for Frame versions (with flap) using steel wire springs.
- Body and heat sink in die-cast aluminium.
- Reflector in metallic-finished thermoplastic material with scratch protection.
- Specialist optical system designed to achieve effective wall washer distribution on the wall.
- Available with dimmable wiring.
- The minimum installation space dimensions are listed in the online instruction catalogue.
- IP20
- IP43 on the visible body of the mount after installation.


### Optics

The innovative wall washer optic (patented) was designed to ensure uniform lighting of walls, from the highest to the lowest points, as well as avoiding shadow areas in zones near the ceiling.



Correct installation distances to achieve uniform lighting of the walls.

L= 0.8 m  
X= 1 m  
X/2= 0.5 m

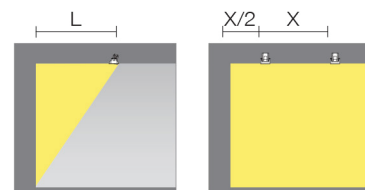



source		system		optic	code	colour
W	lm	W	lm			

**Frame version - ø75**


**LED**

3000K - CRI 90	
10W	1200
10W	672
WW	P370
	01-43-47
	E9

2700K - CRI 90	
10W	1150
10W	644
WW	P369
	01-43-47
	E9

Warm Dimming - CRI 90	
10W	620
10W	366
WW	P371
	01-43-47
	E9

The power supply with code MY19 must be ordered separately for Warm dimming versions.  
Power supply to be ordered separately.



source		system		optic	code	colour
W	lm	W	lm			

**Minimal version - ø75**


**LED**

3000K - CRI 90	
10W	1200
10W	672
WW	QA70
	01-04
	E8

2700K - CRI 90	
10W	1150
10W	644
WW	QA69
	01-04
	E8

Warm Dimming - CRI 90	
10W	620
10W	366
WW	QA71
	01-04
	E8

The power supply with code MY19 must be ordered separately for Warm dimming versions.  
Power supply to be ordered separately.  
To install minimal products a QA82 flange is required.



source		system		optic	code	colour
W	lm	W	lm			


**Frame version - 75x75**

**LED**

3000K - CRI 90	
10W	1200
10W	672
WW	P392
	01-43-47
	E9

2700K - CRI 90	
10W	1150
10W	644
WW	P391
	01-43-47
	E9

Power supply to be ordered separately



source		system		optic	code	colour
W	lm	W	lm			


**Minimal version - 75x75**

**LED**

3000K - CRI 90	
10W	1200
10W	672
WW	QA79
	01-04
	E8

2700K - CRI 90	
10W	1150
10W	644
WW	QA78
	01-04
	E8

Power supply to be ordered separately.  
To install minimal products a QA83 flange is required.



Mounting accessories	code	colour
Minimal square flange	QA83	01
For recessed 75x75 mm version		
Minimal circular flange	QA82	01
For recessed ø 75 mm version		
Minimal circular flange	PA22	01
For recessed ø 75 mm version		

Power supply	code	colour
Constant current power supply unit non dimmable IP20 15W		
VIN = 220-240VAC 50/60Hz MY37 00 075		
Constant current power supply unit 1-10V IP20 16W		
VIN = 110-240VAC 50/60Hz MY18 00 075		
Constant current power supply unit DALI IP20 20W		
VIN = 110-240VAC 50/60Hz MY19 00 075		

Power supply	code	colour
Constant current power supply unit IGBT + TRIAC IP20 12W		
VIN = 110-240VAC 50/60Hz MY20 00 075		
Emergency kit	MY21	00