

MERIDIANO

Design by Jordi Vilardell & Meritxell Vidal.

VIBIA
LIGHT IS CREATION

Reference

4710.

Application

Outdoor lamps

Installation type

Surface / Built-in

Description

Meridiano is an outdoor lamp that boasts different functions, where matter and light are integrated in a single body. Meridiano can be used as outdoor seating by day and an outdoor lamp at night. Designed by Jordi Vilardell & Meritxell Vidal. Available in three colours: khaki, green and off-white.

Diffuser

Glass diffuser

Finish



4710-07.

Khaki lacquer

4710-58.

Off-white matt
lacquer

4710-62.

Matt green
lacquer

Sketch



Electrical characteristics

1 x LED 7,7W 700mA

Total 7.7 W



Physical characteristics

1 Box / 0.57 x 0.66 x 0.66 m. / Vol. 0.2483 m³ /
Gross weight 18.2 kg. / Net weight 15.6 kg.

Installation and assembly

Please see the installation manual

Light distribution

Ground lighting

Reduced-height outdoor lamp to shade light on the ground.

Photometric data

Efficiency : 59.99%

Coordinate system : CG

Total flux : 650.00 lm

Maximum value : 297.52 cd/klm


Light position : C=90.00 G=20.00

Double symmetrical : 3

Isolux : Isolux (Floor)

Light position :

X=0.00m Y=0.00m Z=0.46m

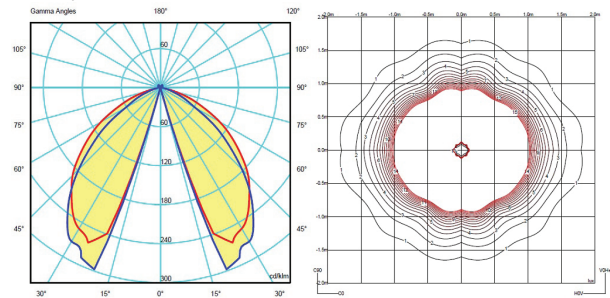

Certificates



MERIDIANO

Design by Jordi Vilardell & Meritxell Vidal.

VIBIA
LIGHT IS CREATION

Reference

4715.

Application

Outdoor lamps

Installation type

Surface / Built-in

Description

Meridiano is an outdoor lamp that boasts different functions, where matter and light are integrated in a single body. Meridiano can be used as an outdoor table by day and an outdoor lamp at night. Designed by Jordi Vilardell & Meritxell Vidal. Available in three colours: khaki, green and off-white.

Diffuser

Glass diffuser

Finish



4715-07.

Khaki lacquer

4715-58.

Off-white matt
lacquer

4715-62.

Matt green
lacquer

Sketch



Electrical characteristics

1 x LED 7,7W 700mA

Total 7.7 W



Physical characteristics

1 Box / 0.43 x 0.94 x 0.94 m. / Vol. 0.3800 m³ /
Gross weight 20.1 kg. / Net weight 16.7 kg.

Installation and assembly

Please see the installation manual

Light distribution

Ground lighting

Reduced-height outdoor lamp to shade light on the ground.

Photometric data

Efficiency : 59.99%

Coordinate system : CG

Total flux : 650.00 lm

Maximum value : 297.52 cd/klm


Light position : C=90.00 G=20.00

Double symmetrical : 3

Isolux : Isolux (Floor)

Light position :

X=0.00m Y=0.00m Z=0.32m

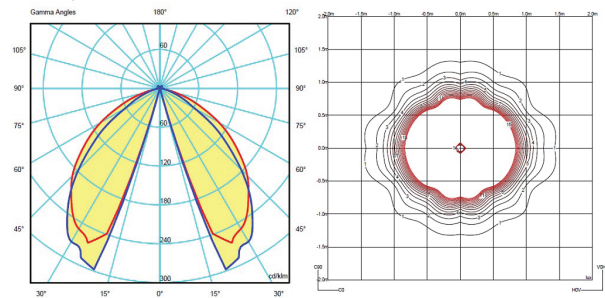

Certificates

