

m o o o i

Perch Light Wall

UMUT YAMAC



Made of folded paper and brass, the Perch evokes a feeling of freedom. Let the graceful bird swing and glow with joy. Just beware that it might just spread its wings and fly away...

Detailing



This sunlit bird is free to swing when softly touched. It gently glows and brings along the promise of spring.

Colours

Brass and white

Perch Light Wall Large non-dimmable

Dimensions

18cm | 7.1"



18cm | 7.1"

33cm | 13"



51cm | 20.1"

Product

WIDTH 33cm | 13"
HEIGHT 51cm | 20.1"
DEPTH 18cm | 7.1"
WEIGHT NETTO 3kg | 6.61lbs

Packaging

WIDTH 34cm | 13.4"
HEIGHT 21cm | 8.3"
CUBAGE 0.06m³ | 2.09ft³
LENGTH 83cm | 32.7"
WEIGHT 2.5cm | 5.51lbs

Technical CE

MATERIAL

Steel and aluminium frame with PP and SYN-DUR bird

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

1

FREQUENCY

50/60

DIMMABLE

No

COLOUR

Black

COLOUR TEMPERATURE

3000 K

LIGHT DIRECTION

All directions

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

90-264

MAX POWER CONSUMPTION

5W

LAMPHOLDER

LED (Solid state)

CABLE LENGTH

260cm | 102.4"

CRI

80

LIGHT OUTPUT

150 lm

Technical cULus

MATERIAL

Steel and aluminium frame with PP and SYN-DUR bird

ENERGY LABEL

Energy Label B


INSTALLATION REQUIRED

Yes

LIGHTSOURCE TYPE	LED	LIGHTSOURCE INCLUDED	Yes
NUMBER OF LIGHTSOURCES	1	INPUT VOLTAGE	100-240
FREQUENCY	50/60	MAX POWER CONSUMPTION	5W
DIMMABLE	No	LAMPHOLDER	LED (Solid state)
COLOUR TEMPERATUE	3000 K	CRI	80
LIGHT DIRECTION	All directions	LIGHT OUTPUT	150 lm

Perch Light Wall Recessed Large dimmable 1-10V

Dimensions

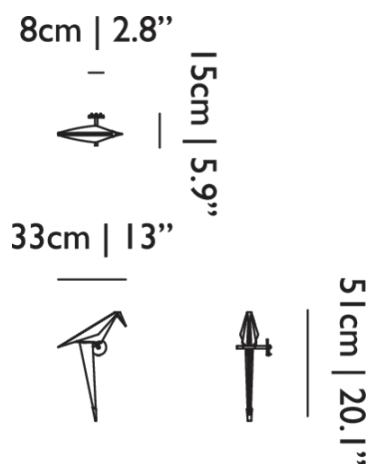

Product

WIDTH 33cm | 13"
HEIGHT 51cm | 20.1"
DEPTH 15cm | 5.9"
WEIGHT NETTO 2kg | 4.41lbs

Packaging

WIDTH 34cm | 13.4"
HEIGHT 15cm | 5.9"
CUBAGE 0.04m³ | 1.26ft³
LENGTH 70cm | 27.6"
WEIGHT 2cm | 4.41lbs

Technical CE

MATERIAL

Steel and aluminium frame with PP and SYN-DUR bird

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

1

FREQUENCY

50/60

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

180-240

MAX POWER CONSUMPTION

5W

DIMMABLE

Yes

COLOUR TEMPERATURE

3000 K

LIGHT DIRECTION

All directions

LAMPHOLDER


LED (Solid state)

CRI

80

LIGHT OUTPUT

150 lm

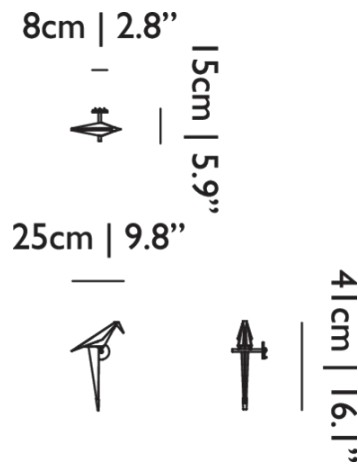*Perch Light Wall Recessed Small dimmable 1-10V**Dimensions**Product***WIDTH** 25cm | 9.8"**HEIGHT** 41cm | 16.1"**DEPTH** 15cm | 5.9"**WEIGHT NETTO** 2kg | 4.4lbs*Packaging***WIDTH** 34cm | 13.4"**HEIGHT** 15cm | 5.9"**CUBAGE** 0.04m³ | 1.26ft³**LENGTH** 70cm | 27.6"**WEIGHT** 2cm | 4.4lbs*Technical CE***MATERIAL**

Steel and aluminium frame with PP and SYN-DUR bird

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

1

FREQUENCY

50/60

DIMMABLE

Yes

COLOUR TEMPERATURE

3000 K

LIGHT DIRECTION

All directions

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

180-240

MAX POWER CONSUMPTION

5W

LAMPHOLDER

LED (Solid state)

CRI


80

LIGHT OUTPUT

150 lm

Perch Light Wall Small non-dimmable

Dimensions

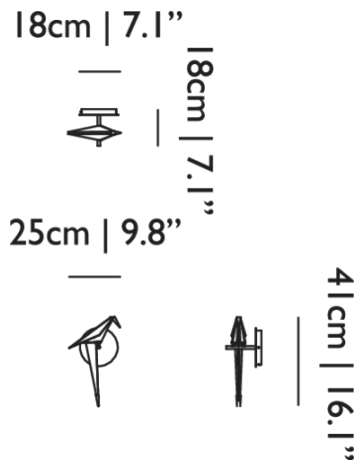

Product

WIDTH 25cm | 9.8"
HEIGHT 41cm | 16.1"
DEPTH 18cm | 7.1"
WEIGHT NETTO 3kg | 6.61lbs

Packaging

WIDTH 34cm | 13.4"
HEIGHT 21cm | 8.3"
CUBAGE 0.06m³ | 2.09ft³
LENGTH 83cm | 32.7"
WEIGHT 2.5cm | 5.51lbs

Technical CE

MATERIAL

Steel and aluminium frame with PP and SYN-DUR bird

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

1

FREQUENCY

50/60

DIMMABLE

No

COLOUR

Black

COLOUR TEMPERATUE

3000 K

LIGHT DIRECTION

All directions

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

90-264

MAX POWER CONSUMPTION

5W

LAMPHOLDER

LED (Solid state)

CABLE LENGTH

260cm | 102.4"

CRI

80

LIGHT OUTPUT

90 lm

Technical cULus

MATERIAL

Steel and aluminium frame with PP and SYN-DUR bird

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

1

FREQUENCY

50/60

DIMMABLE

No

COLOUR TEMPERATUE

3000 K

LIGHT DIRECTION

All directions

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

100-240

MAX POWER CONSUMPTION

5W

LAMPHOLDER

LED (Solid state)

CRI

80

LIGHT OUTPUT

90 lm