

kreon rei

kreon rei is a family of products offered as individual wall mounted luminaires or as a continuous system. The individual kreon rei luminaires are low level wall recessed or surface wall mounted products designed to provide discreet placement lighting via an optimised reflector system. They are available in two sizes with a choice of black or white finish.

kreon rei continuous system is a ceiling surface mounted or ceiling recessed mounted luminaire offered with a choice of wall wash optic or downlight optic. Both types can be specified to length.



kreon rei wallwash optical system is developed to provide a homogenous continuous luminance on vertical surfaces and is the perfect solution for galleries, residential or retail applications where vertical plane luminance is a prerequisite of the lighting planning.

kreon rei downlight provides continuous controlled lighting in an optimised symmetric beam of just 55° to focus light over task areas or where an increased ambient level of lighting is required.



rei 300, black





rei downlight recessed, black





rei wallwasher surface mounted, white



rei on-track, white

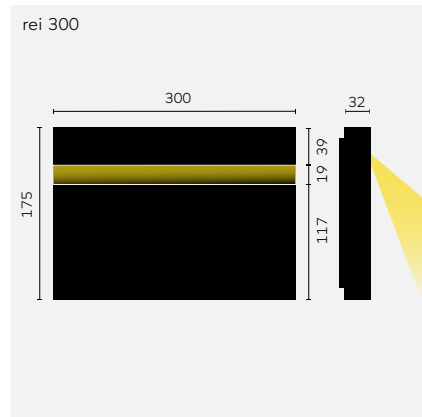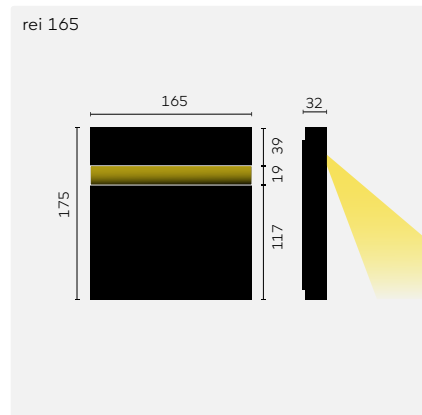


	Colour	KR-code	Light sources	Optional accessories
 rei 165	○	KR983211	①	■
	●	KR983212	①	■
 rei 300	○	KR983221	②	■
	●	KR983222	②	■
Optional accessories				
Plasterkit		KR783010	Plasterkit rei 165 ☉ LxW 180x190 D 55	
		KR783020	Plasterkit rei 300 ☉ LxW 315x190 D 55	


	CRI	CCT	Voltage	Wattage	Fixture lumen
① LED	CRI80+	3000K	230V	4W	128lm
② LED	CRI80+	3000K	230V	8W	290lm

REMARKS
 Leading and trailing edge phase dimmable driver included.
 Gear included.
 IP40




Plasterkit 165



Plasterkit 300



kreon rei profile

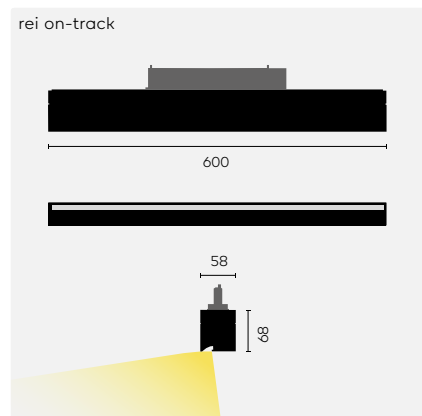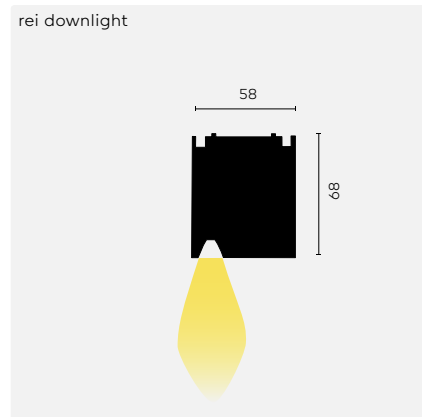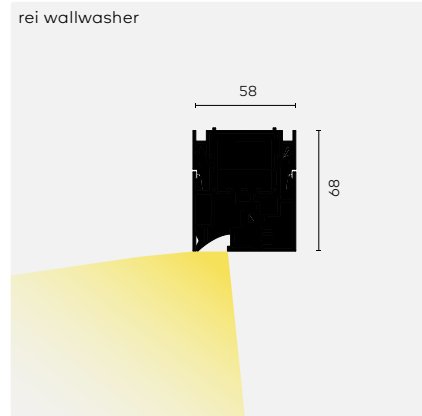

	Colour	KR-code	Light sources	8027 2700K, CR80	8030 3000K, CR80	9027 2700K, CR90	9030 3000K, CR90	SM Switchable ON/OFF ③	VD 1-10V dimming ③	DD DALI dimming ③	Required accessories	Optional accessories
rei wallwasher surface mounted ①	○	KR983251	①	●	●	●	●	●	●	●	■	■
	●	KR983252	①	●	●	●	●	●	●	●	■	■
rei wallwasher recessed mounted ①	○	KR983241	①	●	●	●	●	●	●	●	■	■
	●	KR983242	①	●	●	●	●	●	●	●	■	■
rei downlight surface mounted ①	○	KR993251	②	●	●	●	●	●	●	●		
	●	KR993252	②	●	●	●	●	●	●	●		
rei downlight recessed mounted ①	○	KR993241	②	●	●	●	●	●	●	●	■	
	●	KR993242	②	●	●	●	●	●	●	●	■	
rei wallwasher on-track ② 230V	○	KR983131	③	●	●	●	●	●				
	●	KR983132	③	●	●	●	●	●				

■ Required accessories

Plasterkit for recessed mounting

[KR783040](#) Trimless plasterkit ② LxW Lx75 D 88

[KR783240](#) Trimless plasterkit (gen. 2) ② LxW Lx80 D 85

	CRI	CCT	Voltage	Wattage	Fixture lumen
① LED	CRI80+	2700K/3000K	230V	25,7W/m	920lm/m
	CRI90+	2700K/3000K	230V	25,7W/m	644lm/m
② LED	CRI80+	2700K/3000K	230V	25,7W/m	1019lm/m
	CRI90+	2700K/3000K	230V	25,7W/m	713lm/m
③ LED	CRI80+	2700K/3000K	230V	12,8W	605lm
	CRI90+	2700K/3000K	230V	12,8W	471lm

REMARKS


① Maximum shipping length of a single run profile is 3828mm. Shipping length depends on transport possibilities.

② Phase dimmable. Only for 3~Eutrack 230V profile. For track accessories see page 484.


③ Minimum profile length driver incl:
SW: min. 702mm
VD or DD: min. 974mm.
Minimum profile length driver excl: 294mm.

Gear included.
IP40

Plasterkit



Plasterkit gen. 2



rei profile

