

W700.SHIP Curve LED Wall Light Datasheet




TRU-COLOUR.

Product codes


Unit: W700.SHIP	Series: CR	Colour temp.: 2.7K (2700K) 3K (3000K) 4K (4000K)	Beam angle (°): 36 (36°)	Colour: B (BLACK) W (WHITE) (RAL8025)	Driver: ND (Non-Dimmable)	Version: 1.0
---------------------------	----------------------	--	------------------------------------	---	-------------------------------------	------------------------

Dimensions (mm)

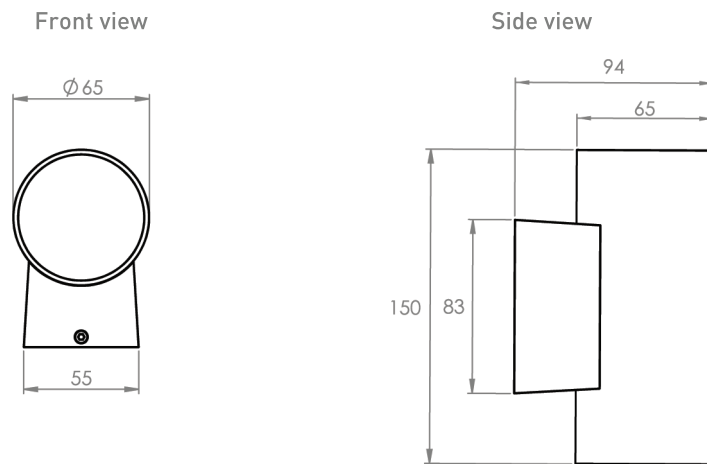


Photometrics

Source lumen output: 705lm
Delivered lumen: 560lm
Efficacy: 94lm/W
Colour temp.: 2700K
Beam angle: 36°
CRI: >98
Standard deviation of colour matching (SDCM): 3 Macadam steps

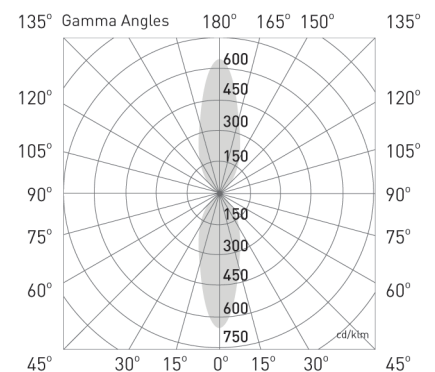


Installation




Step 1

Unscrew the two grub screws from the top and bottom of the luminaire housing to release the base plate and junction box.




Step 2

Thread the power cable through the base plate. Use the base plate as a guide to drill two pilot holes for the wall plugs.




Step 3

Once wall plugs have been pressed into the wall fasten the base plate to the wall using the screws provided.




Step 4

Connect the mains power cable to the terminal block.



Step 5

Position the luminaire housing back to the base plate and secure by putting back the grub screws.



Step 6

Installation complete