

WELLES GLASS

Chandelier



GABRIEL SCOTT
est 2012

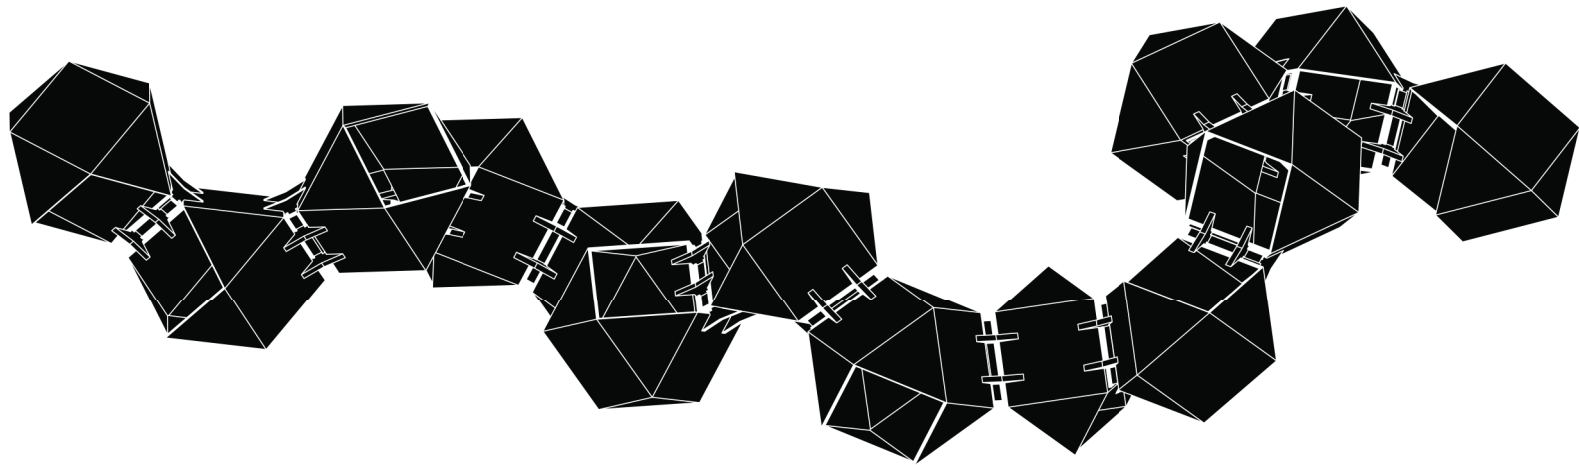

www.GabrielScott.com

WELLES GLASS

Long Chandelier

1/16

A new type of modular elegance, the WELLES bridges feminine and masculine sensibilities for a perfect blend of strength and sophistication.

Each one of a kind glass piece is mold-blown to generate a gem like form and create a bright diffused light. Polished prong-like hardware boldly supports each glass volume and holds the body of the overall organic silhouette.

All Gabriel Scott pieces are handmade in Canada.



WELLES GLASS

Long Chandelier

2/16



WELLES GLASS

Long Chandelier

3/16



GABRIEL SCOTT

EST. 2012



372 Broome Street, New York, NY 10013

(212) 837-2923 • info@GabrielScott.com

www.GabrielScott.com

WELLES GLASS

Long Chandelier

4/16



WELLES GLASS

Long Chandelier

5/16



GABRIEL SCOTT
EST. 2012


372 Broome Street, New York, NY 10013
(212) 837-2923 • info@GabrielScott.com

www.GabrielScott.com

WELLES GLASS

Long Chandelier

6/16



GABRIEL SCOTT

EST. 2012



372 Broome Street, New York, NY 10013

(212) 837-2923 • info@GabrielScott.com

www.GabrielScott.com

WELLES GLASS

Long Chandelier

7/16

Spec sheet


Product name:	Welles Glass Long Chandelier
Standard Leadtime:	12 - 14 weeks
Dimensions:	This is a modular fixture, see pages below for more information
Light Source:	12V 6 Watt LED bulb (included)
Standard Cable length:	96" Drop, adjustable upon installation (increased cable-lengths available upon request)
LED driver:	E60R12DC (110V)  UVC1250TD (220V) 
Weight:	5lbs per cube See Installation guide for installation details

Standard Finishes

Standard cube finish options:



Standard 5" canopy & monopoint finish options:

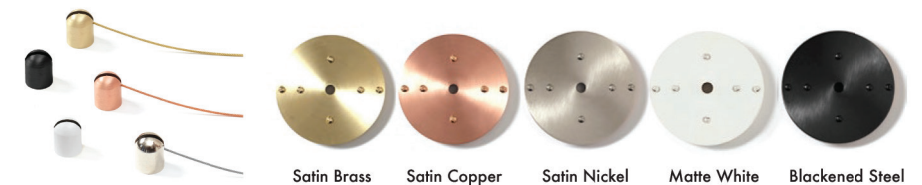


WELLES GLASS


Long Chandelier

8/16

6x
28" LONG

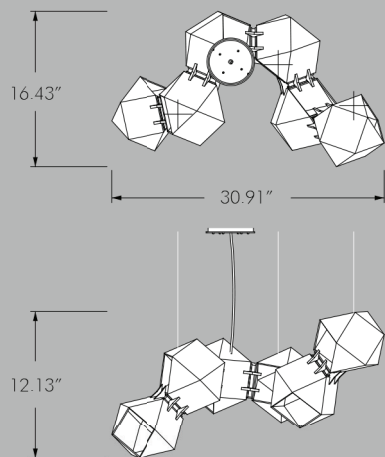

8x
39" LONG

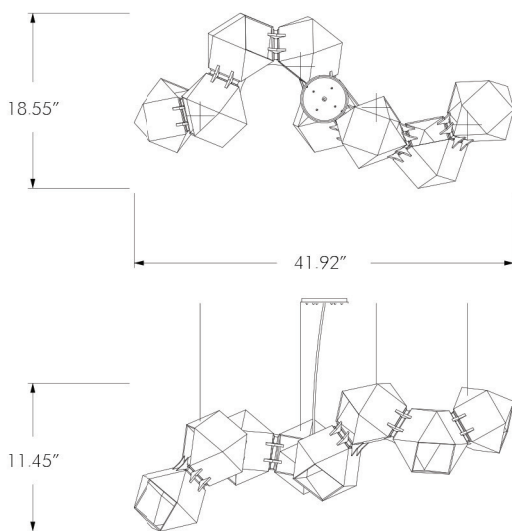

GABRIEL SCOTT
EST 2012



372 Broome Street, New York, NY 10013
(212) 837-2923 • info@GabrielScott.com


www.GabrielScott.com

WELLES GLASS


Long Chandelier

9/16

10x
50" LONG

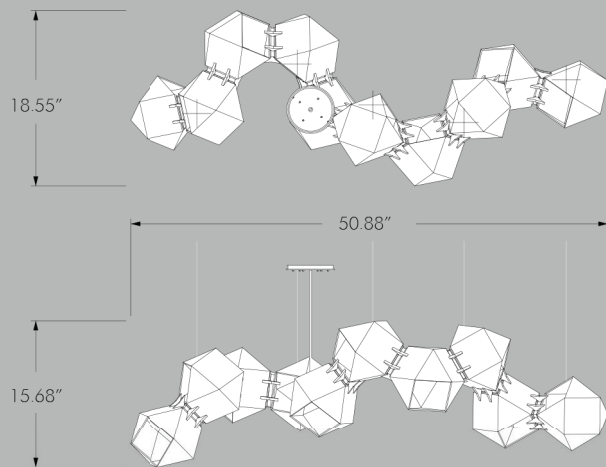

12x
56" LONG

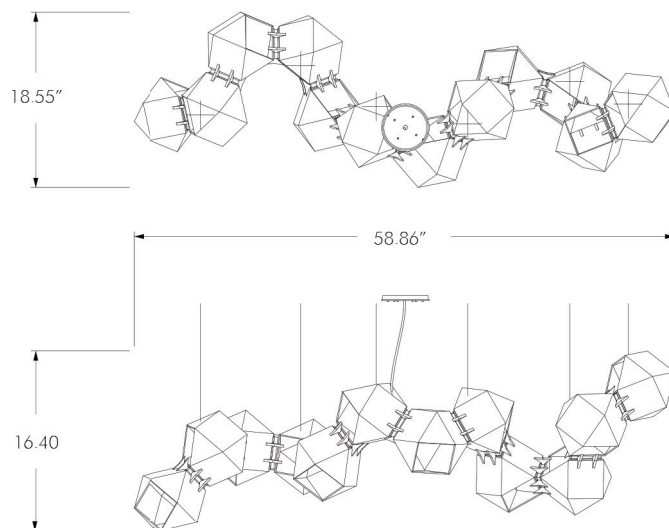

GABRIEL SCOTT
EST 2012



372 Broome Street, New York, NY 10013
(212) 837-2923 • info@GabrielScott.com


www.GabrielScott.com

WELLES GLASS


Long Chandelier

10/16

14x
65" LONG

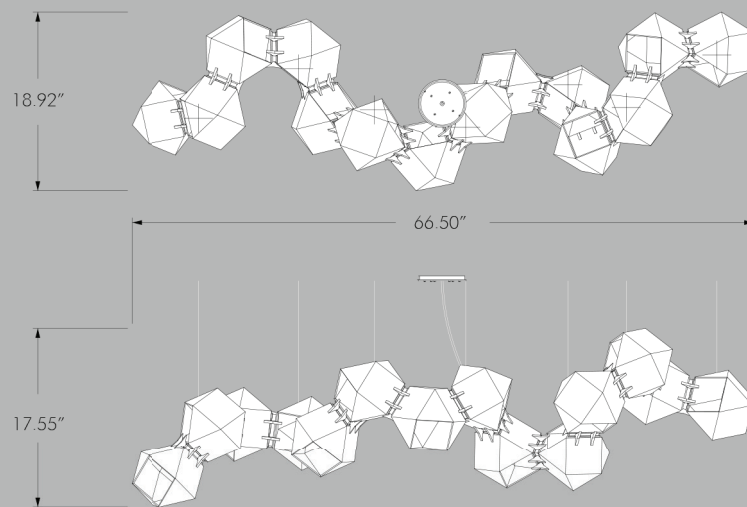

16x
70" LONG

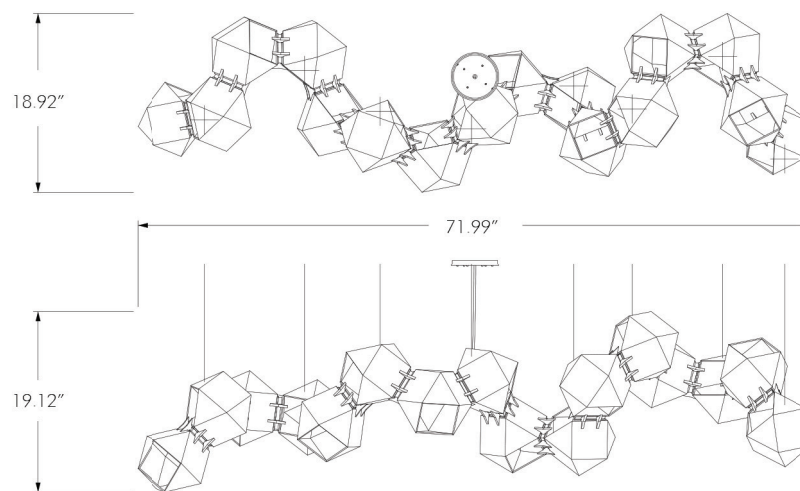

GABRIEL SCOTT

EST 2012



372 Broome Street, New York, NY 10013

(212) 837-2923 • info@GabrielScott.com


www.GabrielScott.com

WELLES GLASS


Long Chandelier

11/16

18x
80" LONG

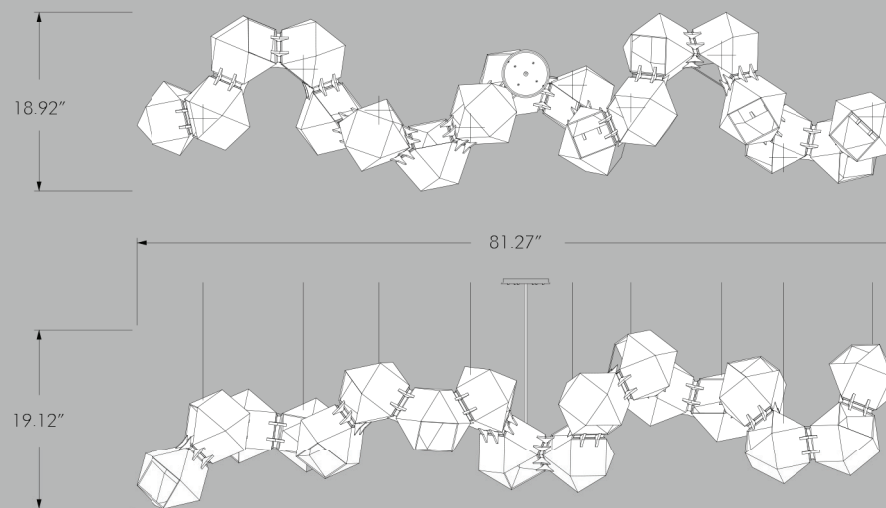

20x
91" LONG

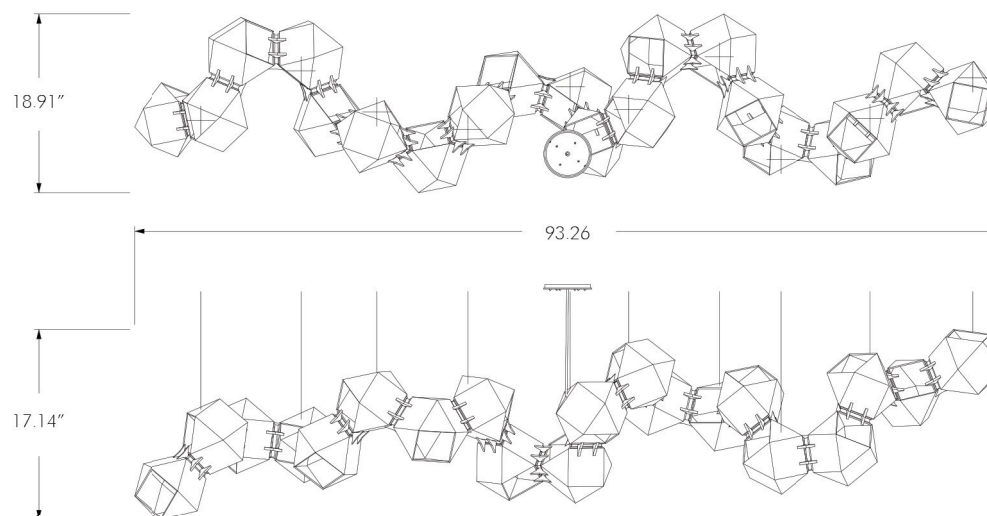

GABRIEL SCOTT
EST 2012



372 Broome Street, New York, NY 10013
(212) 837-2923 • info@GabrielScott.com


www.GabrielScott.com

WELLES GLASS


Long Chandelier

12/16

22x
100" LONG

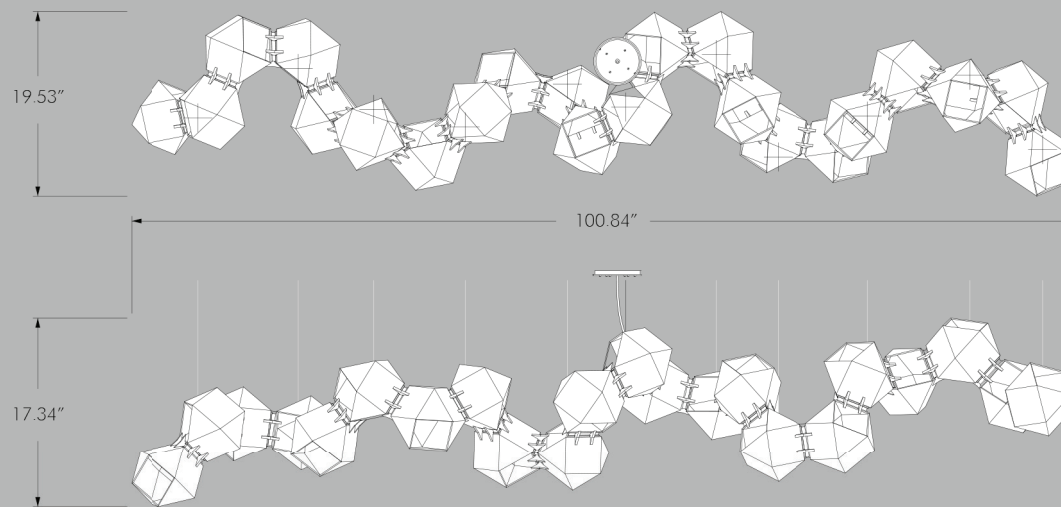

24x
108" LONG

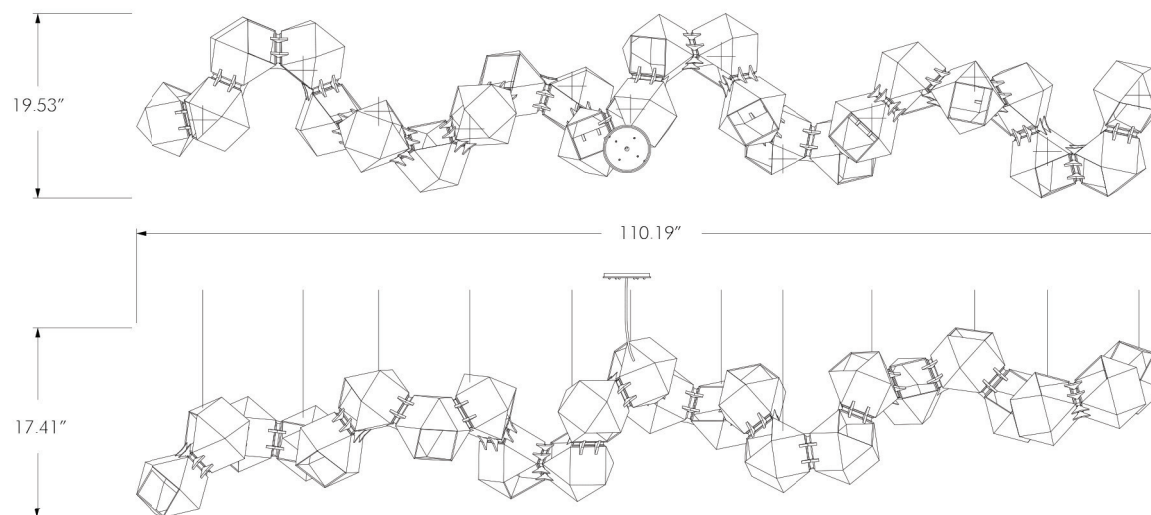

GABRIEL SCOTT
EST 2012



372 Broome Street, New York, NY 10013
(212) 837-2923 • info@GabrielScott.com


www.GabrielScott.com

WELLES GLASS


Long Chandelier

13/16

26x
115" LONG

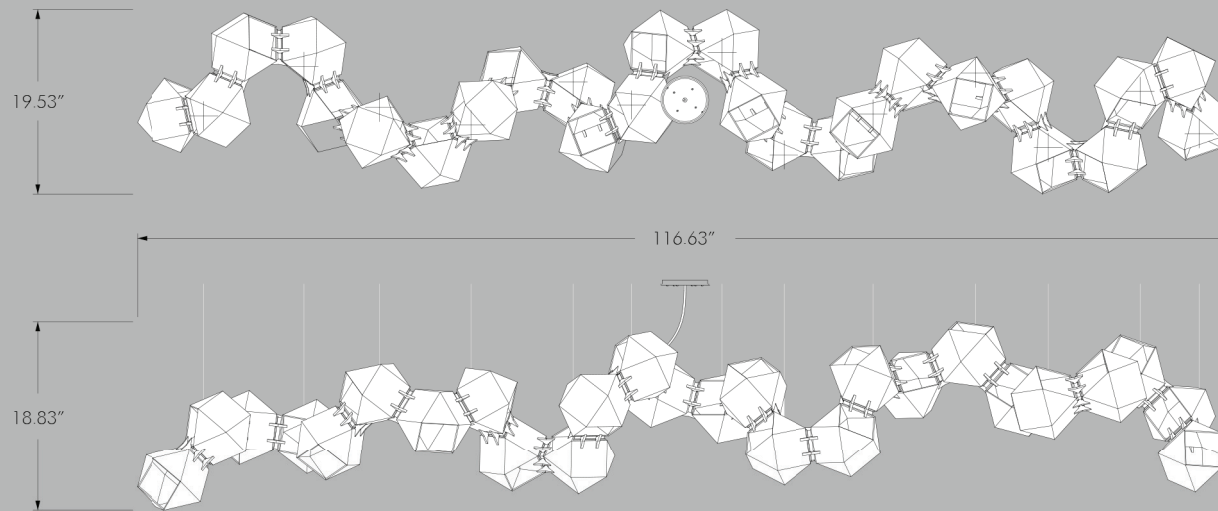

28x
124" LONG

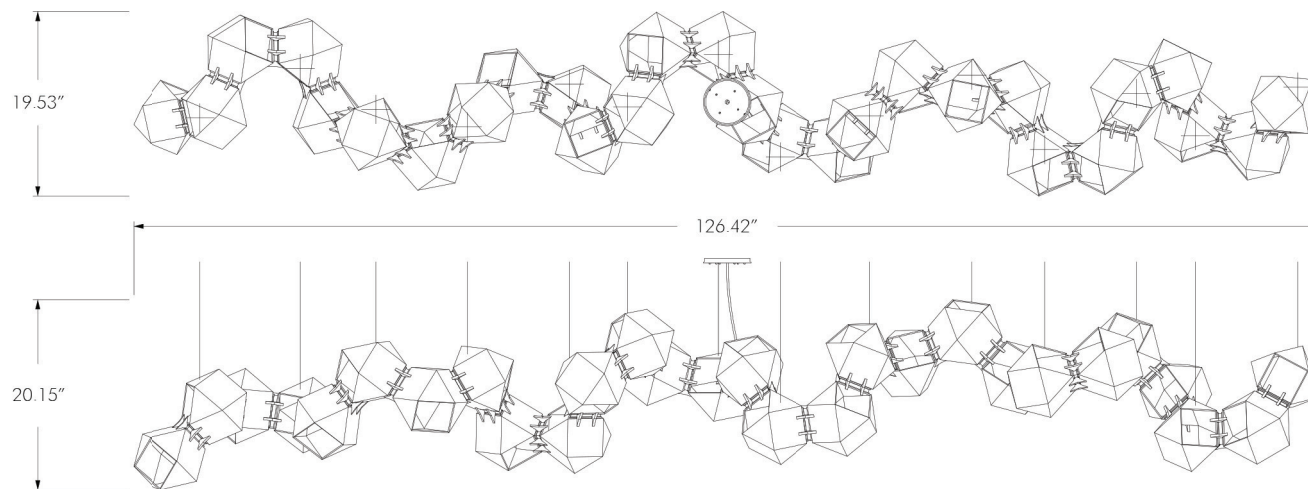

GABRIEL SCOTT
EST 2012



372 Broome Street, New York, NY 10013
(212) 837-2923 • info@GabrielScott.com


www.GabrielScott.com

WELLES GLASS


Long Chandelier

14/16

30x
136" LONG

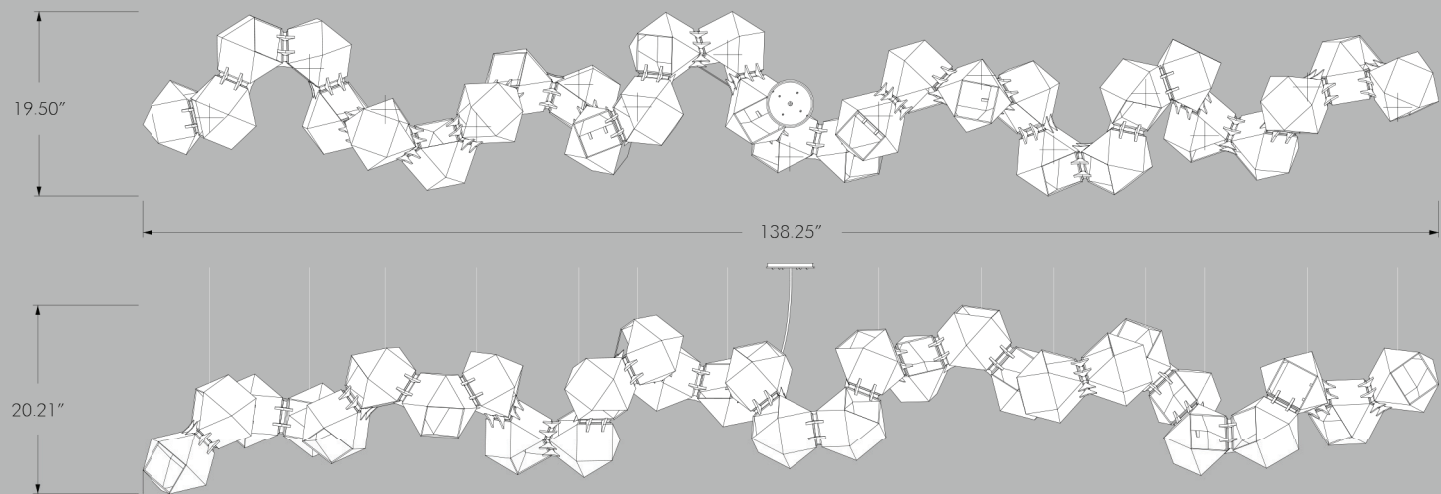

32x
147" LONG

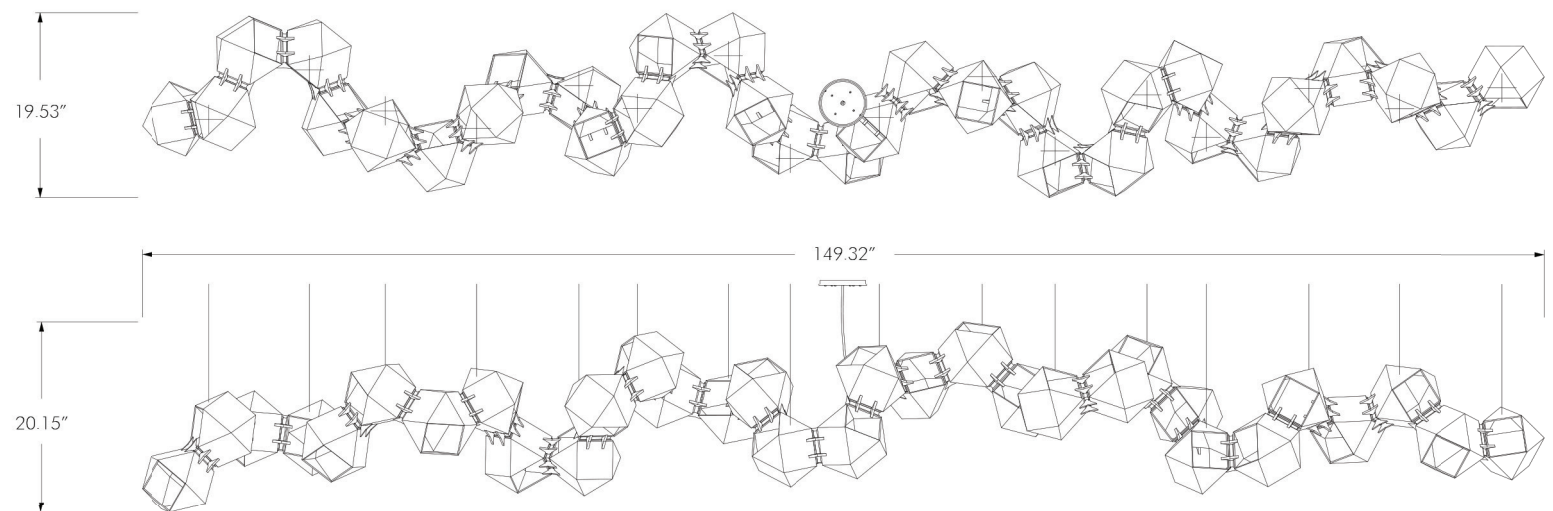

GABRIEL SCOTT
EST 2012



372 Broome Street, New York, NY 10013
(212) 837-2923 • info@GabrielScott.com

www.GabrielScott.com

50W Constant Voltage Triac Dimming LED Driver for 220V

Specifications:

Input voltage	220V - 240VAC
Input frequency	50 - 60 Hz
Input current	0.4A
Inrush current	<2.5A
Power factor	0.95
Output load Voltage	12V
Output current	4.16A
Output power	50W
Power factor	>0.95
Efficiency TYP	>80%

Protection:

Overload	Auto recovery
Short circuit	Auto recovery
Over Voltage	Auto recovery

Environment:

Operating temp	-20c - +50c
Storage temp	-40c - +70c
Relative humidity	5 - 95 %

Safety Standard:

Design refers to EN60598, EN61547, ENV55024, EN61000-4-2, 3, 4, 6, 8, 11, EN61000-3-2, EN61000-3-3

EMI Standard:

Meets Emissions to EN55022, EN55015 Class B


Weight:

200g

Features:

Constant voltage output
Fully isolated
Short circuit, over current and over voltage protection up to 80% efficient
Fire resistant plastic cover
Compatible with leading and trailing edge dimmers
20 - 100% Dimming Load
10 - 100% Dimming range
Mains dimmable
Screw terminals
IP44 design for indoor use
2 years warranty

Mechanical Diagram

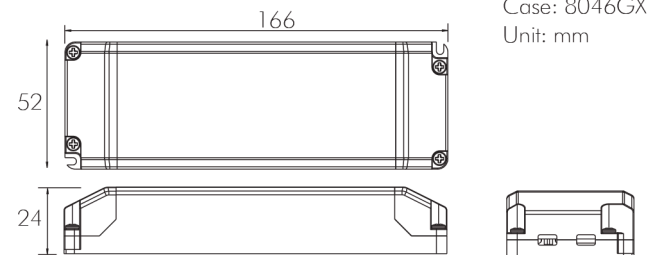

LED Configuration

