


# Recessed / Surface remote driver



## Recessed



Versions

## Surface




Explore and interact with products in 3D.  
[thelightexperience.iguzzini.com](http://thelightexperience.iguzzini.com)



- Wall and ceiling-mounted luminaires.
- Downlight and surface versions.
- Downlight fixing system with steel wire springs.
- Single models with base and multiples with linear support; multiple models with possibility of continuous installation and retaining centres.
- Floodlight body in die-cast aluminium; aluminium mounting brackets.
- Floodlight movements: 90° angle on horizontal plane and 355° rotation around the vertical axis.
- Remote power supply available with separate code numbering.

- IP20
- Class III




Dual rotation




Compact dimensions

## Optics

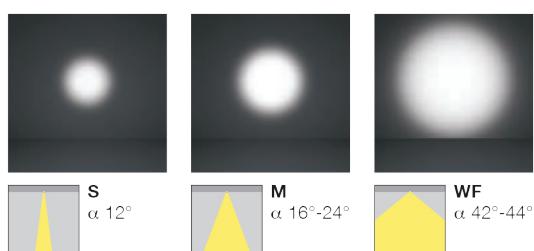

## Spacings

Optimized spacing for continuous distribution of modules with two to three products. Refer to the instruction sheet for values

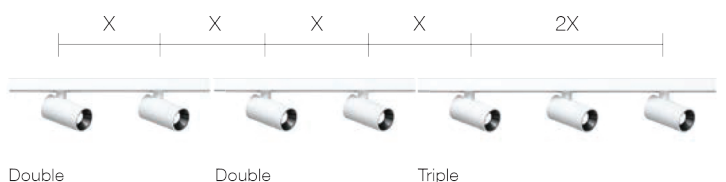




01  
WHITE




04  
BLACK

## Accessories

The accessories allow the features of the lighting produced by the single luminaire to be altered, for highly professional lighting effects.

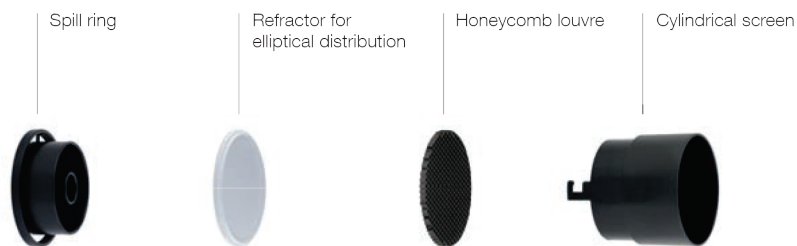


[iguzzini.com](http://iguzzini.com) code finder / download design files / save and organize favorites




source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
2W	180	2W	121	24°	<b>QC12</b> 01-04
2700K - CRI 90					
2W	170	2W	114	24°	<b>QC13</b> 01-04

Power supply to be ordered separately




source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
2W	180	2W	121	24°	<b>QC34</b> 01-04
2700K - CRI 90					
2W	170	2W	114	24°	<b>QC35</b> 01-04

Power supply to be ordered separately




source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
4W	360	4W	241	24°	<b>QC14</b> 01-04
2700K - CRI 90					
4W	340	4W	228	24°	<b>QC15</b> 01-04

Power supply to be ordered separately




source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
4W	360	4W	241	24°	<b>QC36</b> 01-04
2700K - CRI 90					
4W	340	4W	228	24°	<b>QC37</b> 01-04

Power supply to be ordered separately




source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
6W	540	6W	362	24°	<b>QC16</b> 01-04
2700K - CRI 90					
6W	510	6W	342	24°	<b>QC17</b> 01-04

Power supply to be ordered separately



source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
6W	540	6W	362	24°	<b>QC38</b> 01-04
2700K - CRI 90					
6W	510	6W	342	24°	<b>QC39</b> 01-04

Power supply to be ordered separately



# Palco

## Recessed / Surface remote driver




01  
WHITE




04  
BLACK

iguzzini.com code finder / download design files / save and organize favorites



source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
7,2W	600	7,2W	438	16°	<b>QC18</b> 01-04
7,2W	600	7,2W	390	44°	<b>QC19</b> 01-04
2700K - CRI 90					
7,2W	560	7,2W	409	16°	<b>QC20</b> 01-04
7,2W	560	7,2W	364	44°	<b>QC21</b> 01-04

Power supply to be ordered separately




source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
7,2W	600	7,2W	438	16°	<b>QC40</b> 01-04
7,2W	600	7,2W	390	44°	<b>QC41</b> 01-04
2700K - CRI 90					
7,2W	560	7,2W	409	16°	<b>QC42</b> 01-04
7,2W	560	7,2W	364	44°	<b>QC43</b> 01-04

Power supply to be ordered separately




source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
14,4W	1200	14,4W	780	44°	<b>QC22</b> 01-04
2700K - CRI 90					
14,4W	1120	14,4W	728	44°	<b>QC23</b> 01-04

Power supply to be ordered separately




source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
14,4W	1200	14,4W	780	44°	<b>QC44</b> 01-04
2700K - CRI 90					
14,4W	1120	14,4W	728	44°	<b>QC45</b> 01-04

Power supply to be ordered separately





source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
21,6W	1800	21,6W	1170	44°	<b>QC24</b> 01-04
2700K - CRI 90					
21,6W	1680	21,6W	1092	44°	<b>QC25</b> 01-04

Power supply to be ordered separately




source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
21,6W	1800	21,6W	1170	44°	<b>QC46</b> 01-04
2700K - CRI 90					
21,6W	1680	21,6W	1092	44°	<b>QC47</b> 01-04

Power supply to be ordered separately




source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
12W	860	12W	619	12°	<b>QC26</b> 01-04
12W	860	12W	585	42°	<b>QC27</b> 01-04
2700K - CRI 90					
12W	810	12W	583	12°	<b>QC28</b> 01-04
12W	810	12W	551	42°	<b>QC29</b> 01-04

Power supply to be ordered separately



source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
12W	860	12W	619	12°	<b>QC48</b> 01-04
12W	860	12W	585	42°	<b>QC49</b> 01-04
2700K - CRI 90					
12W	810	12W	583	12°	<b>QC50</b> 01-04
12W	810	12W	551	42°	<b>QC51</b> 01-04

Power supply to be ordered separately





01  
WHITE




04  
BLACK




source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
24W	1720	24W	1170	42°	<b>QC30</b> 01-04
2700K - CRI 90					
24W	1620	24W	1102	42°	<b>QC31</b> 01-04

Power supply to be ordered separately




source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
24W	1720	24W	1170	42°	<b>QC52</b> 01-04
2700K - CRI 90					
24W	1620	24W	1102	42°	<b>QC53</b> 01-04

Power supply to be ordered separately




source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
36W	2580	36W	1754	42°	<b>QC32</b> 01-04
2700K - CRI 90					
36W	2430	36W	1652	42°	<b>QC33</b> 01-04

Power supply to be ordered separately



source		system			
W	lm	W	lm	optic	code colour
<b>LED</b>					
3000K - CRI 90					
36W	2580	36W	1754	42°	<b>QC54</b> 01-04
2700K - CRI 90					
36W	2430	36W	1652	42°	<b>QC55</b> 01-04

Power supply to be ordered separately



Optical accessories	code	colour	code	colour	code	colour	code	colour
Honeycomb louvre	---	---	<b>MZ43</b>	04	<b>MZ45</b>	04		
Spill ring	---	---	<b>MZ49</b>	04	<b>MZ52</b>	04		
Refractor for elliptical distribution	---	---	<b>MZ47</b>	24	<b>MZ50</b>	24		
Cylindrical screen	---	---	<b>MZ48</b>	04	<b>MZ51</b>	04		

	 86	 87	 85
Power supply	code colour	code colour	code colour
 Power supply On-Off 50W  Vin = 220-240Vac 50 / 60Hz Iout = 700mA dimensions = 124x79x22	<b>MZ84</b> 00	<b>MZ84</b> 00	<b>MZ84</b> 00
 Constant current power supply unit non dimmable IP20 20W  VIN = 220-240VAC 50/60Hz Iout =350mA/500mA/700mA dimensions: 110x52x22	<b>X020</b> 00	---	---
 Constant current power supply unit 1-10V IP20 50W  VIN = 110-240VAC 50/60Hz 025	<b>MY83</b> 00	<b>MY83</b> 00	<b>MY83</b> 00
 Constant current power supply DALI IP20 50W  VIN = 220-240VAC 50/60Hz Iout = 350/700/1050mA dimensions: 125x80x22	<b>BZM4</b> 00	<b>BZM4</b> 00	<b>BZM4</b> 00



**RENOVACION Y ÚLTIMAS MANIFESTACIONES DEL ARTE**  
RENEWAL AND LAST MANIFESTATIONS OF ART

El arte contemporáneo ha experimentado una profunda transformación en las últimas décadas, caracterizada por la ruptura de los límites tradicionales y la exploración de nuevos lenguajes y formatos. Esta evolución ha llevado a una mayor integración entre el arte y la vida cotidiana, así como a una mayor participación del espectador en el proceso creativo. En este espacio, se presentan algunas de las obras más representativas de esta corriente, que reflejan la búsqueda constante de nuevas formas de expresión y la reflexión sobre el papel del arte en la sociedad actual.