

FOCUS RS GRILL BADGE

LIT LOGOS INSTALLATION GUIDE



INCLUDED PARTS

- 1 - Lit Logos RS Shifter Trim Badge
- 1 - Lit Logos Control Box
- 1 - RS Stencil
- 1 - Inline Fuse
- 2 - Ring Terminal
- 1 - Lit Logos decal

HOW TO INSTALL

1. Disconnect the car battery


2. Remove the front bumper to have a easier access for install.

Dont forget to disconnect the fog light wires after loosening the bumper!

3. Remove your OEM RS badge.

The logo is only held on via 3M tape. A little bit of heat and a plastic pry tool or card will help get behind the logo to pull it off.

4. Using the 3M tape on the back of the stencil, place the Lit Logos RS Stencil on the grill lined up with the OEM RS Badge location.

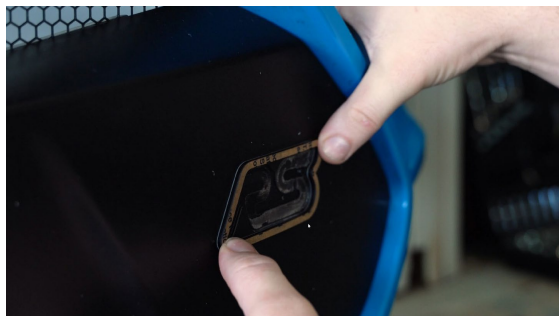

5. Using a dremel or simmlar grinding tool, trim out the inside of the stencil area to allow the logo housing to fit into place.

We designed the stencil to prevent you from being able to cut too far. You will need to clear out all of the material inside the stencil in order for the logo to slide into place.



6. Confirm that the RS Logo housing slides into the grill with the stencil still on. Once the logo can slide through, you can remove the stencil.

7. Place the RS Lit Logo into the space cleared out during step 5 and secure it to the grill from the backside using some hot glue, epoxy, or any other adhesive.

If you are using the OEM Connector installation, this is the same connector you will plug the Lit Logos Control Box in to at a later step.



CONTINUED BELOW...

FOCUS RS GRILL BADGE LIT LOGOS INSTALLATION GUIDE



8. Tuck the Control Box out of the way, but still within reach of the front bumper where you installed the logo.

We found that the Drivers side of the crash bar was a safe place to put it.

9. Route the power and ground wires up to the battery.

Connect the ground wire to the chassis ground.

10. Connect the inline fuse to the red power wire via the crimp connector and attach a ring connector to the other end. Connect the wire to the positive terminal on the battery.

11. Connect the control box to the logo using the water-proof quick disconnect and thread the plastic nut all the way on.

Ensure the arrows on both sides of the connector line up before connecting. If the arrows arent lined up, the logo will not work and you can risk damaging the pins.

This connector will allow you to still remove your front bumper without removing the logo.

12. Reinstall the bumper, connect the car battery and youre done!

CONTINUED BELOW...

FOCUS RS GRILL BADGE

LIT LOGOS INSTALLATION GUIDE



LED HUE BLUETOOTH APP

Download the LEDHue app from the App Store/Google Play store. Below are some tips for using the LEDHue app to control your Lit Logo:

Click this heart to mark your favorite moving color options. (Press and hold to hide all non-favorited options)

Select a color on this bar and then use the above slider to create and save your custom color

This slider controls the independent white chip. (This setting will stay on even if you turn off the logo from the slider in the main menu)

Press and hold the device name to rename it.

Ensure the settings are "GRB" and "SK6812_RGBW"

Ensure the number of pixels is set at 30

LIT LOGOS BLUETOOTH APP INSTRUCTIONS

This slider adjusts the brightness of the logo

This slider adjusts the speed of the moving color options

Switch this to turn the logo on and off

TROUBLESHOOTING STEPS

We hope you never have any issues with your logo, but if you do, here are the best steps to take to get it working again as quickly as possible:

- Turn off Bluetooth on your phone, uninstall and reinstall the app, and try to connect to the logo again
- Ensure the ground source is clean and connected directly to unpainted metal.
- Check the app and ensure the logo is set to "GRB SK6812_RGBW" and the pixels should be set to 15
- Make sure the logo is switched to the "on" position in the app
- Make sure that the bottom slider on the app control is turned all the way down
- Make sure that the top slider on the app control is turned all the way up
- Try using a different phone to connect to the logo
- Check that the arrows on the quick disconnect between the logo and the control box are pointing towards each other
- Disconnect the logo from power and leave off for 12 hours