


N 30, wall-mounted cooker hood, 60 cm, clear glass  
D64ABCONOB



B



The curved glass canopy hood combines two design styles: transparent glass as well as the classic box hood design.

- ✓ LED lighting: a clear illumination whilst cooking thanks to the energy-saving LED lights
- ✓ CleanAir Recirculation Filter (separate accessory): nothing but clean air thanks to the premium recirculation filter with high odour reduction (ca. 95%). Regenerative filter also available.
- ✓ High extraction rate: Ensures a clear view while cooking thanks to efficient motor technology as either a ducted or recirculating solution.

#### Features

##### Technical Data

Color chimney : Stainless steel  
 Typology : Chimney  
 Approval certificates : CE, VDE  
 Length electrical supply cord (cm) : 130  
 Height of the chimney (mm) : 576-897/576-1007  
 Height of product, without chimney (mm) : 50  
 Minimum distance above an electric hob : 550  
 Minimum distance above a gas hob : 650  
 Net weight (kg) : 15.725  
 Type of control : mechanical  
 Number of speed settings : 3  
 Maximum output air extraction (m<sup>3</sup>/h) : 613  
 Maximum output recirculating air (m<sup>3</sup>/h) : 365  
 Number of lights : 2  
 Noise level (dB(A) re 1 pW) : 68  
 Diameter of air outlet (mm) : 150 / 120  
 Grease filter material : Washable aluminium  
 EAN code : 4242004222514  
 Connection Rating (W) : 220  
 Current (A) : 10  
 Voltage (V) : 220-240  
 Frequency (Hz) : 50; 60  
 Plug type : GB plug  
 Installation typology : Wall-mounted

#### Optional accessories

Z50XP0X0	CleanAir act.carbon filter regenerative
Z5170X1	CleanAir active carbon filter spare part
Z51DXA0X0	Active carbon filter
Z51DXU0X0	Recirculating kit
Z51FXI0X0	Integrated CleanAir Recirculation Kit
Z51FXJ0X0	Integrated CleanAir Recirculation Kit
Z5270X0	CleanAir Recirculation Kit
Z5865N0	Stainless steel back panel
Z5905N0	Chimney extension 1000 mm
Z5915N0	Chimney extension 1500 mm



4 242004 222514

N 30, wall-mounted cooker hood, 60 cm, clear  
glass  
D64ABCNOB

## Features

### Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A++ to E)\*
- Max. extraction rate: 612 m<sup>3</sup>/h
- Noise max. Normal Level: 68 dB\*

### Features

- Push button control operation
- 3 power levels
- 2 x 1.5w LED Light
- Colour Temperature: 3500 K
- 1 metal grease filter cassette
- For wall mounted installation

### Design

- Stainless steel Glass
- Glass design
- Chimney hood
- Push button control operation
- Mechanical controls

### Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Max. extraction rate: 612 m<sup>3</sup>/h
- Maximum extraction rate exhaust air 612 m<sup>3</sup>/h according to EN 61591
- Extraction rate in recirculation mode:  
Max. normal use: 365 m<sup>3</sup>/h
- Noise max. Normal Level: 68 dB\*
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 68 dB(A) re 1 pW (55 dB(A) re 20 µPa sound pressure)
- Noise level in recirculation mode:  
Max. normal use: 75 dB(A) re 1 pW (62 dB(A) re 20 µPa sound pressure)
- 
- Light Intensity: 113 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 617-947 x 600 x 488 mm
- Dimensions recirculating (HxWxD): 617-1057 x 600 x 488 mm
- Dimensions recirculating with CleanAir module (HxWxD):  
686 x 600 x 488 mm - mounting with outer chimney  
815-1145 x 600 x 488 mm - mounting with telescopic chimney
- Energy Efficiency Class: B (at a range of energy efficiency classes from A++ to E)\*
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*
- Average Energy Consumption: 46.2 kWh/year\*


### Optional accessories

- Recirculating kit Z5270X0


\* In accordance with the EU-Regulation No 65/2014

N 30, wall-mounted cooker hood, 60 cm, clear glass  
D64ABCNOB



Dimensioned drawings

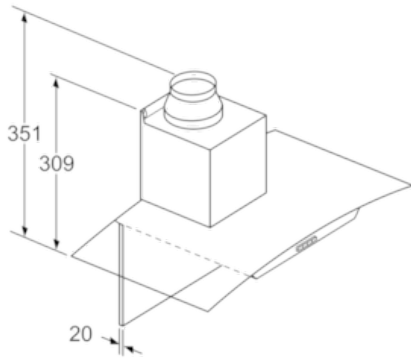

If a back panel is used, the design of the appliance must be considered. measurements in mm

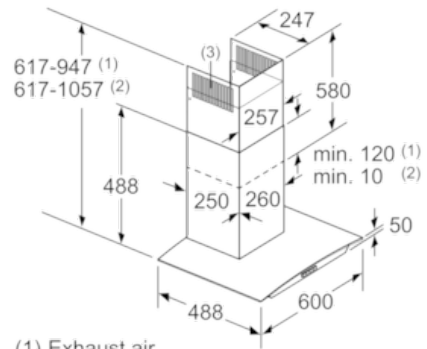

(1) Exhaust air  
(2) Circulated air  
(3) Air outlet – slots for exhaust air to be mounted facing down measurements in mm

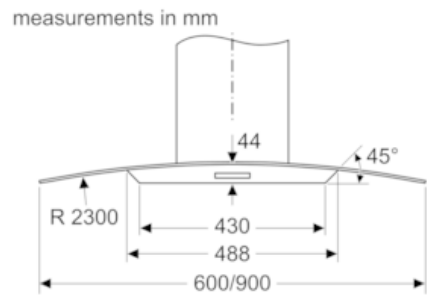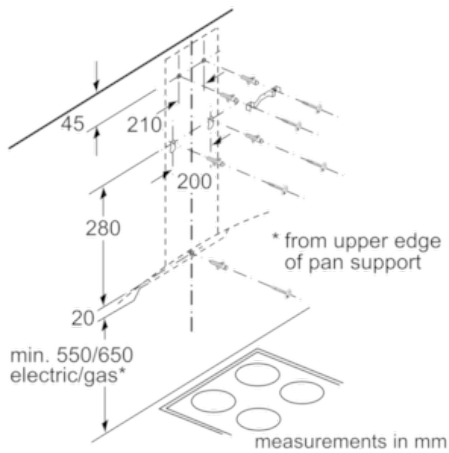

Dimensions for designing rear wall panels. Please ensure that all dimensions are within the tolerances. The actual dimensions must be checked on the appliance in question.

