


N 70, wall-mounted cooker hood, 60 cm, Stainless steel  
D65BMP5N0B



A

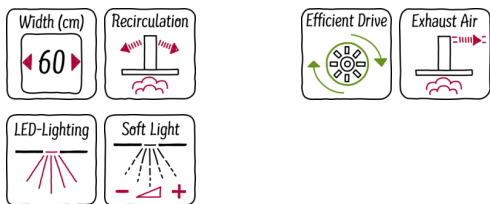

The coordinating and stylish Neff box hood is modern in design and keeps up with your cooking.

- ✓ High extraction rate: Ensures a clear view while cooking thanks to efficient motor technology as either a ducted or recirculating solution.
- ✓ Dimmer Function – easily dim the light according to your mood with the touch of a finger
- ✓ LED lighting: a clear illumination whilst cooking thanks to the energy-saving LED lights
- ✓ EfficientDrive: save energy and enjoy a quieter kitchen thanks to efficient brushless motor technology
- ✓ Interval Ventilation – automatically ventilates every hour for crisp, clean air

#### Features

##### Technical Data

Color chimney : Stainless steel  
 Typology : Chimney  
 Approval certificates : CE, VDE  
 Length electrical supply cord (cm) : 130  
 Height of product, without chimney (mm) : 46  
 Minimum distance above an electric hob : 550  
 Minimum distance above a gas hob : 650  
 Net weight (kg) : 21.424  
 Type of control : Electronic  
 Number of speed settings : 3-stage + 2 intensive  
 Maximum output air extraction (m<sup>3</sup>/h) : 414  
 Boost position output recirculating (m<sup>3</sup>/h) : 322  
 Maximum output recirculating air (m<sup>3</sup>/h) : 281  
 Boost position air extraction (m<sup>3</sup>/h) : 657  
 Number of lights : 2  
 Noise level (dB(A) re 1 pW) : 61  
 Diameter of air outlet (mm) : 120 / 150  
 Grease filter material : Washable stainless steel  
 EAN code : 4242004234890  
 Connection Rating (W) : 143  
 Current (A) : 10  
 Voltage (V) : 220-240  
 Frequency (Hz) : 50; 60  
 Plug type : GB plug  
 Installation typology : Wall-mounted

#### Optional accessories

Z50XP0X0	CleanAir act.carbon filter regenerative
Z5101X1	Active carbon filter
Z5101X5	Recirculating kit
Z5170X1	CleanAir active carbon filter spare part
Z51FXI0X5	Integrated CleanAir Recirculation Kit
Z51FXJ0X5	Integrated CleanAir Recirculation Kit
Z5270X0	CleanAir Recirculation Kit
Z5865N0	Stainless steel back panel
Z5905N0	Chimney extension 1000 mm
Z5915N0	Chimney extension 1500 mm



N 70, wall-mounted cooker hood, 60 cm, Stainless steel  
D65BMP5NOB

## Features

### Key performance features:

- Energy Efficiency Class: A (at a range of energy efficiency classes from A++ to E)\*
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 413 m<sup>3</sup>/h  
Intensive 657 m<sup>3</sup>/h
- Noise max. Normal Level: 61 dB\*

### Features

- Touch control
- 3 power levels and 2 intensive settings
- 2 x 1.5w LED Light
- softLight with dimmer function
- Efficient BLDC-technology
- Interval operation
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- 2 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- Noise reduction function
- easy to clean Inner frame

### Design

- Stainless steel
- Box design
- Chimney hood
- For wall mounted installation
- Touch control
- Electronic controls

### Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 413 m<sup>3</sup>/h  
Intensive 657 m<sup>3</sup>/h
- Extraction rate according to EN 61591 max. 413 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 61 dB(A) re 1 pW (48 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:  
Max. normal use: 61 dB(A) re 1 pW (48 dB(A) re 20 µPa sound pressure)  
Intensive: 71 dB(A) re 1 pW (58 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 61 dB (A) re 1pW
- Noise max. Normal Level: 61 dB\*
- 
- Light Intensity: 267 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 628-954 x 598 x 500 mm
- Dimensions recirculating (HxWxD): 628-1064 x 598 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD): 809-1139 x 598 x 500 mm
- Energy Efficiency Class: A (at a range of energy efficiency classes from A++ to E)\*
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*
- Average Energy Consumption: 34.7 kWh/year\*

\* In accordance with the EU-Regulation No 65/2014

N 70, wall-mounted cooker hood, 60 cm, Stainless steel  
 D65BMP5N0B

Dimensioned drawings

