


N 90, wall-mounted cooker hood, 90 cm, clear glass black printed
D961KW1S0B



A⁺

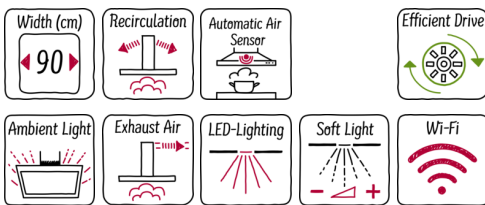

The sleek black glass design angled hood ensures your kitchen is free from cooking smells thanks to advanced features which let you get on with your cooking

- ✓ Ambient Light: choose from 31 colours to illuminate your kitchen wall behind the hood in the light that suits your style
- ✓ Special noise insulation: guarantees an extremely quiet cooking experience
- ✓ Sensor-controlled automatic system: focus on your cooking and keep the noise to a minimum thanks to the fully automatic hood control when the Wi-Fi compatible hob is switched on
- ✓ Climate Control Sensor: Detects the amount of steam and smells using a sensor attached to the motor and automatically sets the most effective power level to extract it
- ✓ Hob-Hood Control: conveniently control the hood directly from the hob (with Wi-Fi enabled hob)

Features

Technical Data

Color chimney : Stainless steel
 Typology : Chimney
 Approval certificates : CE, VDE
 Length electrical supply cord (cm) : 130
 Height of product, without chimney (mm) : 323
 Minimum distance above an electric hob : 450
 Minimum distance above a gas hob : 600
 Net weight (kg) : 22.703
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 468
 Boost position output recirculating (m³/h) : 583
 Maximum output recirculating air (m³/h) : 430
 Boost position air extraction (m³/h) : 837
 Number of lights : 2
 Noise level (dB(A) re 1 pW) : 55
 Diameter of air outlet (mm) : 150 / 120
 Grease filter material : Washable aluminium
 EAN code : 4242004209584
 Connection Rating (W) : 170
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : GB plug
 Installation typology : Wall-mounted

Optional accessories

Z50XP0X0	CleanAir act.carbon filter regenerative
Z5170X1	CleanAir active carbon filter spare part
Z51AIA0X0	Active carbon filter (spare part)
Z51AIROX0	Recirculation kit regenerative chimless
Z51AIS0X0	Recirculation kit regenerative
Z51AIT0X0	Recirculation kit for chimless use
Z51AIU0X0	Recirculation kit
Z51AXK0N0	Chimney extension 1000 mm
Z51AXL0N0	Chimney extension 1500 mm



4 242004 209584

*N 90, wall-mounted cooker hood, 90 cm, clear
glass black printed
D96IKW1SOB*

Features

Key performance features:

- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A++ to E)*
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 467 m³/h
Intensive 837 m³/h
- Noise max. Normal Level: 55 dB*

Features

- Climate Control Sensor
- Ambient light
- Hob-Hood control (with Wi-Fi enabled hob)
- Touch control
- LED display
- 3 power levels and 2 intensive settings
- 2 x 3w LED Light
- Colour Temperature: 3500 K
- softLight with dimmer function
- Efficient BLDC-technology
- Noise reduction function
- Interval operation
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- 2 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- Additional noise insulation
- easy to clean Inner frame
- For wall mounted installation
- Rim ventilation

Design

- Black Glass
- Angled glass design
- Chimney hood
- Touch control
- Electronic controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Easy installation system
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 467 m³/h
Intensive 837 m³/h
- Extraction rate according to EN 61591 max. 467 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 55 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 55 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)
Intensive: 67 dB(A) re 1 pW (54 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 55 dB (A) re 1pW
- Noise max. Normal Level: 55 dB*
-
- Light Intensity: 519 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 928-1198 x 890 x 545 mm
- Dimensions recirculating (HxWxD): 988-1258 x 890 x 545 mm
- Dimensions recirculating with CleanAir module (HxWxD):
1118 x 890 x 545 mm - mounting with outer chimney
1188-1458 x 890 x 545 mm - mounting with telescopic chimney
- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A++ to E)*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 31.5 kWh/year*

Optional accessories

- Recirculating kit

* In accordance with the EU-Regulation No 65/2014