


N 70, island cooker hood, 90 cm, Stainless steel
196BMP5N0B



COOKING PASSION SINCE 1877



A+

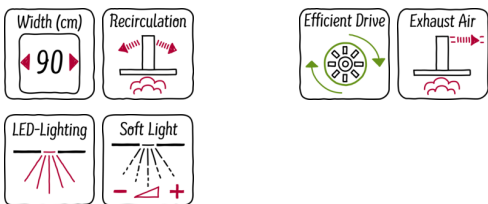

The coordinating and stylish Neff box hood is modern in design and keeps up with your cooking.

- ✓ High extraction rate: Ensures a clear view while cooking thanks to efficient motor technology as either a ducted or recirculating solution.
- ✓ Special noise insulation: guarantees an extremely quiet cooking experience
- ✓ Dimmer Function – easily dim the light according to your mood with the touch of a finger
- ✓ LED lighting: a clear illumination whilst cooking thanks to the energy-saving LED lights
- ✓ EfficientDrive: save energy and enjoy a quieter kitchen thanks to efficient brushless motor technology

Features

Technical Data

Color chimney : Stainless steel
 Typology : Chimney
 Approval certificates : CE, VDE
 Length electrical supply cord (cm) : 130
 Height of the chimney (mm) : 698-878/698-998
 Height of product, without chimney (mm) : 46
 Minimum distance above an electric hob : 550
 Minimum distance above a gas hob : 650
 Net weight (kg) : 30.457
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 445
 Boost position output recirculating (m³/h) : 391
 Maximum output recirculating air (m³/h) : 313
 Boost position air extraction (m³/h) : 867
 Number of lights : 4
 Noise level (dB(A) re 1 pW) : 54
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable stainless steel
 EAN code : 4242004234982
 Connection Rating (W) : 166
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50
 Plug type : GB plug
 Installation typology : Island

Optional accessories

Z50XP0X0	CleanAir act.carbon filter regenerative
Z5106X5	Recirculating kit
Z5170X1	CleanAir active carbon filter spare part
Z5286X0	CleanAir Recirculation Kit
Z5909N1	Chimney extension 1100 mm
Z5912X0	Adapter for roof inclination left/right
Z5914X0	Adapter for roof inclination front/back
Z5919N1	Chimney extension 1600 mm



4 242004 234982

N 70, island cooker hood, 90 cm, Stainless steel

196BMP5NOB

Features

Key performance features:

- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A++ to E)*
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 445 m³/h
Intensive 867 m³/h
- Noise max. Normal Level: 54 dB*

Features

- Touch control
- 3 power levels and 2 intensive settings
- 4 x 1.5w LED Light
- softLight with dimmer function
- Efficient BLDC-technology
- Interval operation
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- 3 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- Noise reduction function
- Additional noise insulation
- easy to clean Inner frame

Design

- Stainless steel
- Box design
- Island chimney hood
- For ceiling mounted installation
- Touch control
- Electronic controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 445 m³/h
Intensive 867 m³/h
- Extraction rate according to EN 61591 max. 445 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 54 dB(A) re 1 pW (41 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 54 dB(A) re 1 pW (41 dB(A) re 20 µPa sound pressure)
Intensive: 69 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 54 dB (A) re 1pW
- Noise max. Normal Level: 54 dB*
-
- Light Intensity: 425 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 744-924 x 898 x 600 mm
- Dimensions recirculating (HxWxD): 744-1044 x 898 x 600 mm
- Dimensions recirculating with CleanAir module (HxWxD): 812-1044 x 898 x 600 mm
- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A++ to E)*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 31.6 kWh/year*

Optional accessories

- Recirculating kit Z5106X5, Z5102X1

* In accordance with the EU-Regulation No 65/2014

N 70, island cooker hood, 90 cm, Stainless steel
196BMP5NOB

Dimensioned drawings

