


N 90, island cooker hood, 90 cm, Stainless steel
196BMV5N5B



COOKING PASSION SINCE 1877



A

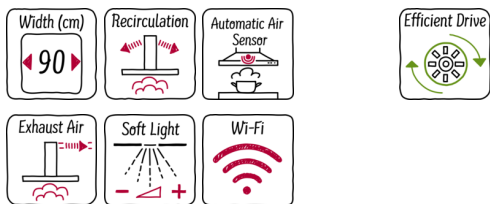

The coordinating and stylish Neff box hood is modern in design and keeps up with your cooking.

- ✓ High extraction rate: Ensures a clear view while cooking thanks to efficient motor technology as either a ducted or recirculating solution.
- ✓ Special noise insulation: guarantees an extremely quiet cooking experience
- ✓ Sensor-controlled automatic system: focus on your cooking and keep the noise to a minimum thanks to the fully automatic hood control when the Wi-Fi compatible hob is switched on
- ✓ Hob-Hood Control: conveniently control the hood directly from the hob (with Wi-Fi enabled hob)
- ✓ Adjustable LED White Colour Temperature – easily adjust the light to the shade that's right for your kitchen

Features

Technical Data

Color chimney : Stainless steel
 Typology : Chimney
 Approval certificates : CE, VDE
 Length electrical supply cord (cm) : 130
 Height of the chimney (mm) : 698-878/698-998
 Height of product, without chimney (mm) : 46
 Minimum distance above an electric hob : 550
 Minimum distance above a gas hob : 650
 Net weight (kg) : 30.762
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 445
 Boost position output recirculating (m³/h) : 391
 Maximum output recirculating air (m³/h) : 313
 Boost position air extraction (m³/h) : 867
 Number of lights : 4
 Noise level (dB(A) re 1 pW) : 54
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable stainless steel
 EAN code : 4242004234999
 Connection Rating (W) : 172
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : GB plug
 Installation typology : Island

Optional accessories

Z50XP0X0	CleanAir act.carbon filter regenerative
Z5106X5	Recirculating kit
Z5170X1	CleanAir active carbon filter spare part
Z5286X0	CleanAir Recirculation Kit
Z5909N1	Chimney extension 1100 mm
Z5912X0	Adapter for roof inclination left/right
Z5914X0	Adapter for roof inclination front/back
Z5919N1	Chimney extension 1600 mm



4 242004 234999

N 90, island cooker hood, 90 cm, Stainless steel

196BMV5N5B

Features

Key performance features:

- Energy Efficiency Class: A (at a range of energy efficiency classes from A++ to E)*
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 445 m³/h
Intensive 867 m³/h
- Noise max. Normal Level: 54 dB*

Special features

- Climate Control Sensor
- Hob-Hood control (with Wi-Fi enabled hob)
- Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- Adjustable color temperature (2.700 K - 5.000 K) for adaption to the room lighting available via Home Connect
- Fully automatic hood

Features

- Touch control
- 3 power levels and 2 intensive settings
- 4 x 3W LED lights
- softLight with dimmer function
- Efficient BLDC-technology
- Interval operation
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- 3 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- Noise reduction function
- Additional noise insulation
- easy to clean Inner frame

Design

- Stainless steel
- Box design
- Island chimney hood
- For ceiling mounted installation
- Touch control
- Electronic controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 445 m³/h
Intensive 867 m³/h
- Extraction rate according to EN 61591 max. 445 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 54 dB(A) re 1 pW (41 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 54 dB(A) re 1 pW (41 dB(A) re 20 µPa sound pressure)
Intensive: 69 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 54 dB (A) re 1pW
- Noise max. Normal Level: 54 dB*
-
- Light Intensity: 659 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 744-924 x 898 x 600 mm
- Dimensions recirculating (HxWxD): 744-1044 x 898 x 600 mm
- Dimensions recirculating with CleanAir module (HxWxD): 812-1044 x 898 x 600 mm
- Energy Efficiency Class: A (at a range of energy efficiency classes from A++ to E)*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 35.9 kWh/year*

Optional accessories

- Recirculating kit Z5106X5, Z5102X1

* In accordance with the EU-Regulation No 65/2014

N 90, island cooker hood, 90 cm, Stainless steel
 196BMV5N5B

Dimensioned drawings

