N 50, Built-in warming drawer, 14 cm
N1AHA01N0B

NEFF

A 14cm high warming drawer that can link with a 45cm compact oven to fit perfectly into the 60 cm oven niche.

√ Push & pull – simply give the handleless warming drawer a gentle push to open

√ Stepless temperature control - The warming drawer makes choosing easy with our stepless temperature control from 40°-80°C.

√ Range of applications - Warm your cookwear or utensils and keep your dishes hot and ready.

√ Installation - The warming drawer can be installed separately or combined with your 45 cm compact appliance.

Height (cm)
14

Features

Technical Data

Construction type : Built-in
Color / Material Front : Stainless steel
Maximum number of plates : 14
Maximum number of espresso cups : 64
Dimensions of the product (mm) : 140 x 594 x 540
Dimensions of the packed product (HxWxD) (mm) : 210 x 660 x 660
Required niche size for installation (HxWxD) : 140 x 560 x 550
EAN code : 4242004222484
Electrical connection rating (W) : 400
Current (A) : 6
Voltage (V) : 220-240
Frequency (Hz) : 50; 60
Plug type : GB plug

4 242004 222484

N 50, Built-in warming drawer, 14 cm
N1AHA01N0B

Features

Design

• Push-Pull opening mechanism

Programmes/functions

• Cavity volume: 23 l

• Loading up to 15 kg

• Can accommodate up to:
  -14 plates
  -64 espresso cups

• 4 Functions: keeping drinks and food warm, pre-warming of tableware, yeast dough proving, thawing of delicate foods

• Temperature Range: approx. 40 °C to 80 °C

• On/Off button

Accessories
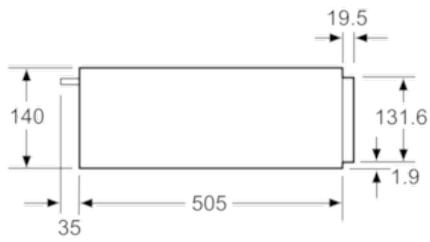
• 1 x Anti-slip mat

Technical information

• Length of mains cable: 150 cm

• Total connected load electric: 0.4 KW

• Nominal voltage: 220 - 240 V

Performance/technical information

• Appliance dimension (hxwxd): 140 mm x 594 mm x 540 mm

• Niche dimension (hxwxd): 140 mm x 560 mm - 568 mm x 550 mm

• Please refer to the dimensions provided in the installation manual

N 50, Built-in warming drawer, 14 cm
N1AHA01N0B

19.5

140

131.6

1.9

505

35

Compact ovens with an appliance
height of 455 mm can be installed
above a warming drawer.
An intermediate floor is not required.

measurements in mm

min. 550

35

590^{+4}

560^{+8}

131.6

140

594

540

measurements in mm