



N 70, Induction hob, 60 cm,  
T46PD53X2



COOKING PASSION SINCE 1877

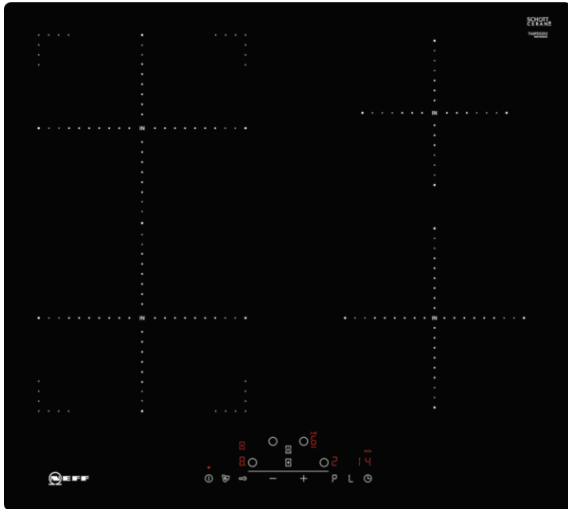

#### Standalone induction cooktop with TouchControl.

- ✓ TouchControl is a highly convenient way to control the hob. One touch is enough. A timer is also included.
- ✓ Combi Induction - 2 individual induction cooking zones can be combined to 1 large zone with even heat distribution.
- ✓ Power Move 2 – the CombiZone is divided into two heating zones: boiling in the front and keeping warm in the rear zone.
- ✓ Induction - With induction cooking, the heat is generated directly in the cookware for precise cooking that stops when power is off.
- ✓ PanBoost - Optimised power level function for more flexible and even faster heating.

#### Features

##### Technical Data

Product name/family : Cooking zone ceramic

Construction type : Built-in

Energy input : Electric

Total number of positions that can be used at the same time : 4

Required niche size for installation (HxWxD) : 56 x 560-576 x 500-516

Width of the product (mm) : 572

Dimensions of the product (mm) : 56 x 572 x 512

Dimensions of the packed product (HxWxD) (mm) : 126 x 753 x 608

Net weight (kg) : 11.591

Gross weight (kg) : 13.0

Residual heat indicator : Separate

Location of control panel : Hob front

Basic surface material : Ceramic

Color of surface : Black

Approval certificates : AENOR, CE

Length of electrical supply cord (cm) : 110

EAN code : 4242004232797

Electrical connection rating (W) : 6900

Voltage (V) : 220-240

Frequency (Hz) : 60; 50

#### Optional accessories

Z9442X0 Set of 3 pots and 1 pan



4 242004 232797

*N 70, Induction hob, 60 cm,  
T46PD53X2*

## Features

### Control

- Touch control

### Flexibility

- Combi zone
- 4 zone induction hob
- 

### Special features

- Boost setting for all zones
- Variable 17-stage power settings for each zone
- Digital display of cooking levels
- 2 stage residual heat indicators
- Timer with automatic shut off for all zones  
LED timer for each zone with switch off function and acoustic signal
- ReStart function
- Automatic pan recognition  
Safety cut out facility  
Control panel lock  
Control panel suspension
- Keep warm function
- Energy consumption display

### Technical information

- Cooking zones: 1 x Ø 210 mm, 2.2 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 190 mm, 2.2 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 145 mm, 1.4 KW (max. Power levels 2.2 KW) Induction; 1 x Ø 180 mm, 1.8 KW (max. Power levels 3.1 KW) Induction
- Measurement: (H/B/T) 56 x 572 x 512 mm
- Installation dimensions: (ID/W/D) 56 mm x 560 mm x 500 mm
- 60 cm width
- Length wire connection: 110 cm
- Main switch
- Min. worktop thickness: 30 mm
- Output 6900 W
- Cable included in packaging

N 70, Induction hob, 60 cm,  
T46PD53X2

Dimensioned drawings

