


N 90, Induction hob, 80 cm,
T68TS6RNO



COOKING PASSION SINCE 1877

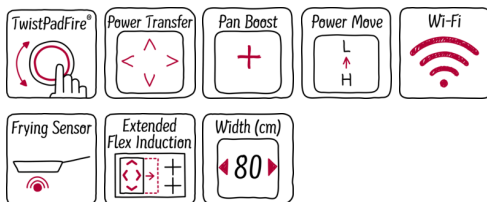

- ✓ The TwistPad® Fire is a removable, magnetic, illuminated control knob that gives you precise, convenient control over all cooking zones. And to make things even easier, only the selectable functions are illuminated.
- ✓ FlexInduction - The FlexZone lets you place your pots and pans anywhere you want and heats them exactly where they stand.
- ✓ Extended FlexZone for even greater flexibility. Perfect for bigger pots and roaster.
- ✓ Cooktop-based hood control: convenient operation of the hood via your hob (with matching hood)
- ✓ FryingSensor - The FryingSensor with 5 selectable temperature settings monitors the set temperature and holds it steady. So there's no more burning.
- ✓ PowerMove - The FlexZone is divided into three heating zones: boiling in front, simmering in the middle and warming in the rear.
- ✓ PowerTransfer - When you reposition a pot on the FlexZone, your settings automatically transfer
- ✓ Induction - With induction cooking, the heat is generated directly in the cookware for precise cooking that stops when power is off.
- ✓ PanBoost - Optimised power level function for more flexible and even faster heating.

Features

Technical Data

Product name/family : Cooking zone ceramic
 Construction type : Built-in
 Energy input : Electric
 Total number of positions that can be used at the same time : 4
 Required niche size for installation (HxWxD) : 51 x 750-780 x 490-500
 Width of the product (mm) : 826
 Dimensions of the product (mm) : 51 x 826 x 546
 Dimensions of the packed product (HxWxD) (mm) : 126 x 953 x 603
 Net weight (kg) : 20.420
 Gross weight (kg) : 22.0
 Residual heat indicator : Separate
 Location of control panel : Hob front
 Basic surface material : Ceramic
 Color of surface : Black, Stainless steel
 Color of frame : Stainless steel
 Approval certificates : AENOR, CE
 Length of electrical supply cord (cm) : 110
 EAN code : 4242004209539
 Electrical connection rating (W) : 7400
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50

Optional accessories

| | |
|---------|---|
| Z9410X1 | Stainless Steel roaster with glass lid |
| Z9415X1 | Steaming Rack for Stainless Steel roaster |
| Z9416X2 | Griddle Plate |
| Z9417X2 | Teppan Yaki (large) |
| Z9442X0 | Set of 3 pots and 1 pan |



4 242004 209539

N 90, Induction hob, 80 cm, T68TS6RNO

Features

Control

- TwistPad® Fire
- Frying Sensor:5 frying levels
- Hob-Hood Control (with Wi-Fi enabled cooker hood)

Flexibility

- 2 Flex Induction Zones with extended flex
- 4 zone induction hob
- PowerTransfer

Special features

- Boost setting for all zones
- PanBoost
- Variable 17-stage power settings for each zone
- Digital display of cooking levels
- 2 stage residual heat indicators
- Timer with automatic shut off for all zones
LED timer for each zone with switch off function and acoustic signal
Count up timer
- ReStart function
- Automatic pan recognition
4.6kW power output (20A); current management options for 16A, 13A or 10A connection
Safety cut out facility
Control panel lock
Control panel suspension
- Keep warm function
- Energy consumption display

Technical information

- Cooking zones: 1 x Ø 400 mmx230 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 400 mmx230 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction
- Measurement: (H/B/T) 51 x 826 x 546 mm
- Installation dimensions: (ID/W/D) 51 mm x 750 mm x 490 mm
- 80 cm width
- Length wire connection: 110 cm
- Main switch
- Min. worktop thickness: 30 mm
- Output 7400 W
- Cable included in packaging

N 90, Induction hob, 80 cm,
T68TS6RNO

Dimensioned drawings

