


Experience easy. No setup. No adjustments. No waste.

BradyPrinter i5300 Industrial Label Printer

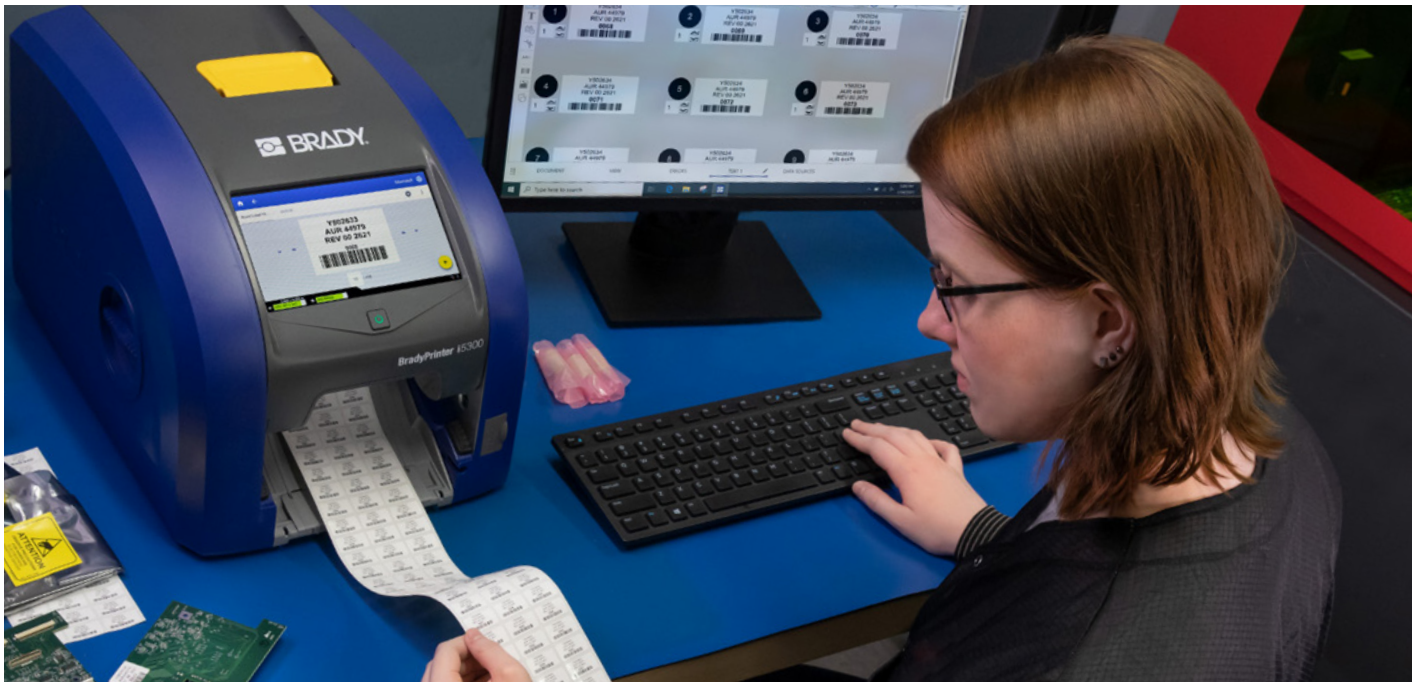


Set up, switch out and print faster than you ever imagined with the BradyPrinter i5300 Industrial Label Printer. It's intuitive, auto-calibrating and precise, printing barcodes and small fonts on labels as small as 5.08 mm. With a solid, metal frame construction, it can handle both high-volume and high-mix labelling applications: electronics and product ID, wire and panel ID, lab ID and safety and facility ID.

Get fast and efficient precision printing for high-mix/high-volume labelling. Printer features quick label set up and no-waste material changeovers.

- 300 dpi; prints small fonts with precision
- Requires no calibration and no heat and speed setting adjustments
- 20-second material changeovers, 5.08 mm – 101.6 mm label widths
- Pauses, resumes and stores print jobs on printer in an adjustable queue with overwrite protection
- 178 mm colour touchscreen and built-in auto cutter
- Solid construction with an all-metal frame
- Intuitive and easy to operate

Easy - inside and out.

When it comes to the BradyPrinter i5300 Industrial Label Printer, everything's easy. Taking just seconds to set up and load, it offers a faster, easier start-to-print process. That's because it's designed for efficiency - no setup, no adjustments and no waste. Zero. Enjoy time-saving features like a print queue and interrupt function. Plus, get precision printing on 75 material types and over 1300 parts, with custom parts available. All this so you can reach your high-mix, high-volume printing goals. Ready? We told you it was easy.

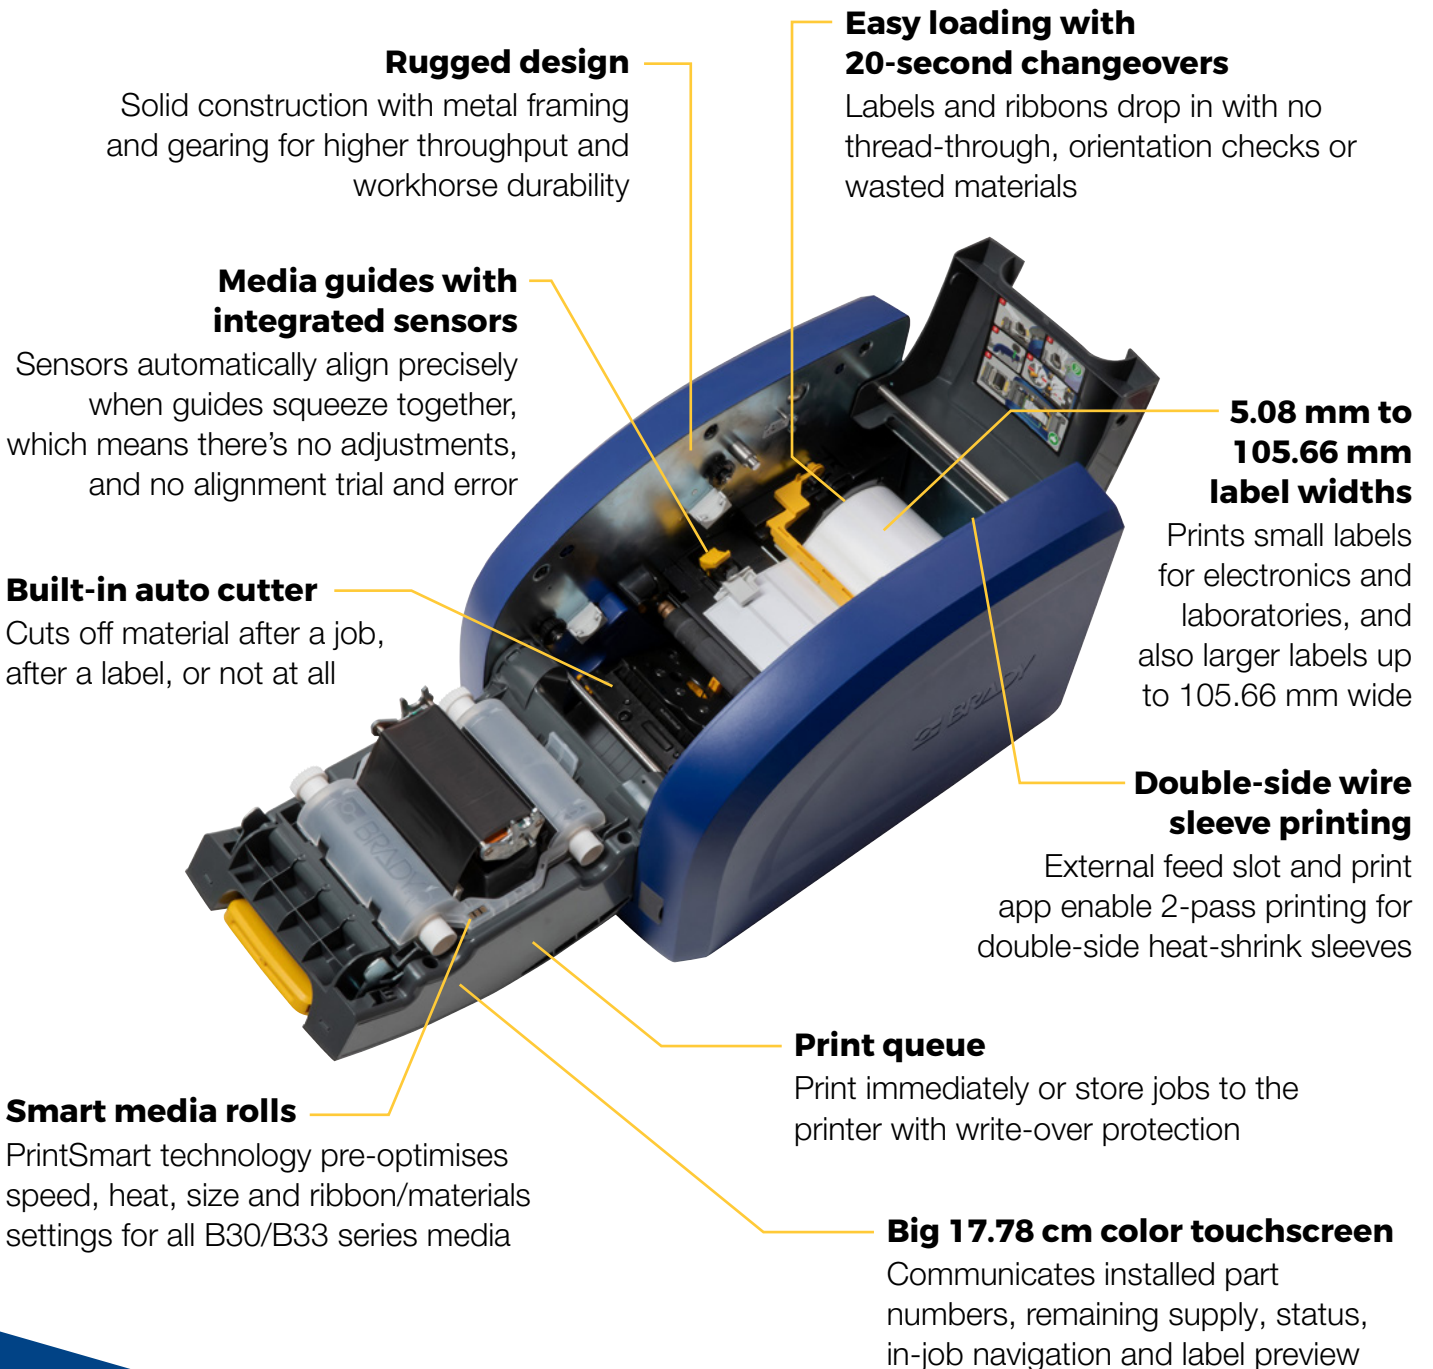

Specifications

Model name	BradyPrinter i5300 Industrial Label Printer	Volume guidelines*	5,000+ labels per day. 5 days per week		Media alignment	Center justified
Printhead/printing characteristics						
Print resolution	300 dpi model 600 dpi model	Print method	Direct transfer, thermal transfer		Cutter type	Auto cutter built-in (all models)
Print colour capability	Single colour	Print job interrupt options	Resume print job where pause or interruption occurs, or select specific label in job		Printhead replacement	Field replaceable (with same dpi only)
Maximum print width (cross-web)	101.98 mm				Print on demand	Yes
Maximum print label length (down-web)	1.524 m	Print roller replacement	Field replaceable (T10 wrench required)		Print pause	Yes
Print speed	up to 177.80 mm/sec - die cuts (300 dpi) up to 254.00 mm/sec - continuous (300 dpi) up to 76.20 mm/sec - die cuts (600 dpi) up to 127.00 mm/sec - continuous (600 dpi)	Stand-alone print job list on printer	Yes - BradyWorkstation print jobs can be saved to printer for later on-printer selection and placement into a Print Queue. This function also write-protects the print jobs from unwanted editing.			
Interface						
Display type and size	Colour LCD touchscreen	Display size (diagonal)	177.80 mm			
Display resolution (h x w)	600 x 1024 pixels	Display status bar	Installed ribbon and label part numbers, amount of supplies remaining, Wi-Fi connection, Bluetooth connection, receiving data icon, ready state/error state			
Display languages	Bahasa Indonesia, Bahasa Melayu, Bulgarian, Chinese (simplified), Chinese (traditional), Croatian, Czech, Danish, Dutch, Estonian, Finnish, French, German, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Romanian, Russian, Slovakian, Slovenian, Spanish, Swedish, Turkish, Thai, Vietnamese					
Interface and connectivity						
PC connection port	1 x USB 2.0 hi-speed device port	Serial port	No	Ethernet	1 x Ethernet 100 BASE-T	Bluetooth (wireless printer model only) Internal Bluetooth module (future functionality)
USB host ports	3 x USB 2.0 type A host port (1 front, 2 back)	SD card slot	No	Wireless	(wireless printer model only) Factory installed Wi-Fi 802.11b/g/n	
Fonts, graphics and barcodes						
Character sets	ASCII character set	Font types (resident)	Arial, Courier New, MS Gothic, Malgun Gothic, MingLiU, SimSun, Tahoma, Times New Roman, Trebuchet MS, Verdana		Barcode symbologies - linear	Code 39, Code 93, Code 128 A, B, C, Codabar, EAN-8, EAN-13, JAN-8, JAN-13, HIBC, Interleaved 2 of 5, Interleaved 2 of 5 w check digit, MSI Plessey, UPC-A
Font types (storable to printer)	TrueType fonts storable to printer via jump drive	Graphic elements	Arrow, line, rectangle, square, circle, ellipse, diamond, not, star, triangle, seal, cross			
Font attributes	Bold, italic, underlined	Graphic formats	BMP, GIF, JPEG, PNG			
Barcode symbologies - 2D	Aztec, DataMatrix, QR Code, PDF-417	Barcode attributes	Sizing: variable in height and ratio Rotation: 0°, 90°, 180°, 270° human-readable and human-readable location density			
Media and ribbon characteristics						
PrintSmart technology	Yes - Reads datachip on supplies for no-waste printing, requires no calibration, has pre-optimized energy and speed settings and features auto label setup in Brady software	Media loading/handling	Labels: In cartridge, drops into place, 15-second changeover Ribbon: In cartridge, snaps into place, 5-second changeover		Media roll o.d. (max)	109.22 mm
		Media parts offering	1300+ stock parts and custom (made-to-request) parts. All B30- and B33- series parts are compatible in the BradyPrinter i5300		Ink side	n/a (ribbon integrated in cartridge - guaranteed correct orientation to printhead)
Sensory and energy setting adjustments	No calibration required, Sensor, Speed and Heat settings are auto-set	Label width (cross-web)	6.35 mm to 107.95 mm (continuous linerless media) 6.35 mm to 101.98 mm (other media)		Label length (down-web)**	5.08 mm minimum (die-cut media). 12.70 mm minimum (continuous media)
Media width (cross-web, including liner)	18.03 mm to 107.95 mm	Media thickness	0.06 mm to 0.79 mm max (label media) 1.78 mm max (B-593 push-button media) 1.09 mm max (heat-shrink sleeves)		Media roll core i.d.	n/a (media roll integrated into drop-in cartridge)
Media roll winding	n/a	Ribbon length (max)	60.96 m	Ribbon roll core i.d.	n/a (ribbon roll integrated into drop-in cartridge)	n/a (ribbon roll integrated into drop-in cartridge)
Media styles	All media is on an integrated cartridge roll with part data on the smart cell. Die-cut media, continuous media, tagstock liner-mounted, tagstock linerless, perforated materials, adhesive labels, heat-shrink sleeves size 094 and larger (single and double-sided with 2-pass print), self-laminating cable labels, cable ties and tags, raised panel push-button labels, rapido-style cable tags, PermaShield-style labels, pre-printed GHS labels, SFID outdoor-grade labels, direct thermal labels					
Media material types	PE (polyethylene), PET (polyester), PET (metallized), PU (polyurethane), PVC (vinyl), PVF (polyvinyl fluoride), PVDF (polyvinylidene fluoride), PP (polypropylene), PI (polyimide), polyamide, polyether polyurethane (Heatex™), raised panel push-button material, paper, tamper-evident and tamper-resistant materials, 8-10 year outdoor vinyl, 10-hour glow-in-the-dark material, retroreflective labels, printable floor marking tape, nylon and vinyl cloth, wash-down materials, extreme temperature laboratory materials, slides/lab-staining materials, other materials not listed					
Software and firmware						
Label creation software	Brady Workstation (v4.12 or newer) and Brady Workstation apps (latest updates)	WHQL certified Windows® drivers	Windows 7, 8, 8.1, 10, server 2008, 2008 R2, 2012, 2012 R2, 2017		Printer command language	BPL - scripting commands for sending scripts to the printer

Physical/operational characteristics					
Dimensions	284.48 mm W x 279.40 mm H x 401 mm D	Power consumption	20W standby/80W operating/200W max	Storage environment	-20 - 50°C/15 - 90% RH non condensing
Weight (without materials loaded)	15.0 kg	Power supply	101 - 240 VAC, 50/60 Hz, 3.5A	Operating environment	10 - 40°C/10 - 85% RH non condensing
Agency approvals	CE, FCC class A, cUL. Contact Brady for up-to-date list of environmental compliance information and agency approvals and/or marks covering over 75 countries (awarded or applied for)			Transport environment	-20 - 50°C/15 - 90% RH non condensing
Electronics					
Processor	32-bit 800 MHz clock rate	Memory (RAM)	512 MB	Internal battery	For internal date and time (RTC)
Data storage when power off	Yes	Data storage (IFFS)	195 MB	SD card slot (SDHC, SDXC)	n/a
Options/accessories					
Replacement printhead	User replaceable (to same dpi)	Auto cutter (on all models)	Built-in	Replacement print roller	115 mm width, user replaceable (T10 wrench required)

* General volume levels for directional model comparison purposes only. Assumes basic text on 25mm x 50mm vinyl labels. Actual results vary depending on combination of material, burn and speed settings, label content, ambient temperature and length of print run.

** User should test to the application. Print performance on small parts or parts smaller than a printer's minimum label dimension spec is dependent on multiple factors including print speed, quantity in print run, heat setting, and the size/layout of the printed elements.
Windows® is a registered trademark of Microsoft Corporation.

Printers

Article No.	Order Ref.	Description
151274	I5300-C-EU	i5300 Industrial Label Printer- EU
310339	I5300-C-EU-LAB	i5300 Industrial Label Printer- EU with Brady Workstation LAB Suite
310341	I5300-C-EU-PWID	i5300 Industrial Label Printer- EU with Brady Workstation PWID Suite
310343	I5300-C-EU-SFID	i5300 Industrial Label Printer- EU with Brady Workstation SFID Suite
151272	I5300-C-NA	i5300 Industrial Label Printer- NA
310351	I5300-C-NA-LAB	i5300 Industrial Label Printer- NA with Brady Workstation LAB Suite
310353	I5300-C-NA-PWID	i5300 Industrial Label Printer- NA with Brady Workstation PWID Suite
310355	I5300-C-NA-SFID	i5300 Industrial Label Printer- NA with Brady Workstation SFID Suite
151276	I5300-C-UK	i5300 Industrial Label Printer- UK
310345	I5300-C-UK-LAB	i5300 Industrial Label Printer- UK with Brady Workstation LAB Suite
310347	I5300-C-UK-PWID	i5300 Industrial Label Printer- UK with Brady Workstation PWID Suite
310349	I5300-C-UK-SFID	i5300 Industrial Label Printer- UK with Brady Workstation SFID Suite

The above part number descriptions do not reflect complete product data - refer to the specification sheet for complete details. i5300 printers accept all B30/B33 series media.

* 600 dpi model available soon.

Quickly identify your products and wires with customised text or graphical labels, using serialised or imported data.
Workstation.BradyID.com/ProductandWire

Ensure labels for all your lab samples and equipment are crisp, clear, readable and contain all necessary information. Easily design and create labels for your cryovials, centrifuge tubes, bottles, conicals, slides and other samples in your laboratory.
Workstation.BradyID.com/LAB

Keep your facility safe and compliant by creating custom signs, label and pipemarkers, adding visual safety guidance.
Workstation.BradyID.com/SafetyAndFacility



WiFi printers

Article No.	Order Ref.	Description
151275	I5300-C-EU-WF	i5300 Industrial Label Printer with Wifi- EU
310340	I5300-C-EU-WF-LAB	i5300 Industrial Label Printer with Wifi- EU with Brady Workstation LAB Suite
310342	I5300-C-EU-WF-PWID	i5300 Industrial Label Printer with Wifi- EU with Brady Workstation PWID Suite
310344	I5300-C-EU-WF-SFID	i5300 Industrial Label Printer with Wifi- EU with Brady Workstation SFID Suite
151273	I5300-C-NA-WF	i5300 Industrial Label Printer with Wifi- NA
310352	I5300-C-NA-WF-LAB	i5300 Industrial Label Printer with Wifi- NA with Brady Workstation LAB Suite
310354	I5300-C-NA-WF-PWID	i5300 Industrial Label Printer with Wifi- NA with Brady Workstation PWID Suite
310356	I5300-C-NA-WF-SFID	i5300 Industrial Label Printer with Wifi- NA with Brady Workstation SFID Suite
151277	I5300-C-UK-WF	i5300 Industrial Label Printer with Wifi- UK
310346	I5300-C-UK-WF-LAB	i5300 Industrial Label Printer with Wifi- UK with Brady Workstation LAB Suite
310348	I5300-C-UK-WF-PWID	i5300 Industrial Label Printer with Wifi- UK with Brady Workstation PWID Suite
310350	I5300-C-UK-WF-SFID	i5300 Industrial Label Printer with Wifi- UK with Brady Workstation SFID Suite

Accessories

Article No.	Description
148703	BradyPrinter i5300 Media Wiper
153661	BradyPrinter i5300 Print Head 300 dpi**
153663	BradyPrinter i5300 Print Roller
133251	Printer Cleaning Kit, Thermal Transfer Printers
142115	Replacement Stylus 3 Pack

** Printheads can only be replaced with same dpi (300 with 300, or 600 with 600)

Learn more at
www.bradyeurope.com/i5300

