

CONTEMPORARY DUAL HANDLE WALL MOUNT POT FILLER

Features

- Over 28 finishes including 13 PVD finishes
- All brass construction
- 22-3/16" wall to center
- 1/4 turn ceramic disc cartridge(s)
- Dual jointed swing spout
- *1/2" FIP inlet quick connect for ease of installation Max flow rate: 4.0 gpm (15.1 L/min) at 60 psi*


Codes/Standards Applicable

Meets or exceeds the following at date of manufacture: • ASME A112.18.1/CSA B125.1 • NSF/ANSI 61 & NSF/ANSI 372

- Commonwealth of MA
- ADA compliant



<u>Kitchen</u>

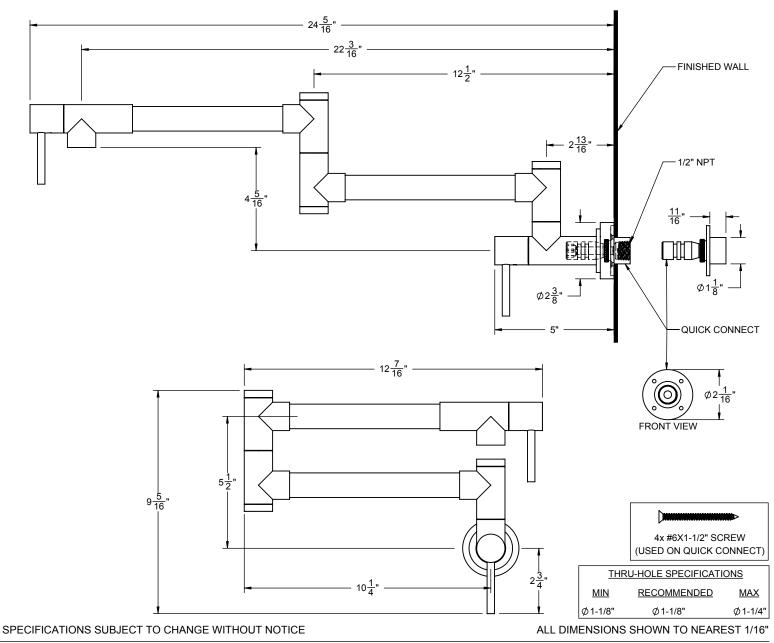

CF-K50-200-XX_sp_200108