
LUDLOW

LDLS10

Ludlow Low Profile Three Hole Deck Mounted Lavatory Faucet with Metal Lever Handles

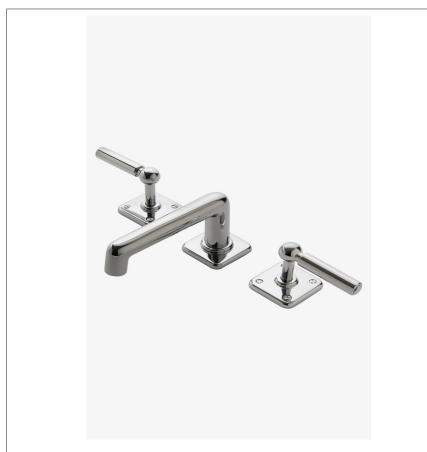

TECHNICAL DETAILS

ADA Compliance: Yes Deck Thickness Maximum: 1 15/16" Deck Thickness Minimum: 3/8" Escutcheon Primary Material: Brass Fittings Hole Diameter: 1 1/4" Flow Restriction Options: 1.0 , 1.2 , 1.5 , 1.75, 2.2 Handle Spread Maximum: 12" Handle Spread Minimum: 8" Handle Turn Angle: Quarter Turn Depth / Width: 7 7/16" Height: 3 5/16" Inlet Connection Size: 1/2" Inlet Connection Type: Male with Supply Nut Inlet Supply Spread Maximum: 12" Inlet Supply Spread Minimum: 8" Installation Type: Deck Mounted Length: 15" Number of Handles: Two Number of Holes: Three Hole Primary Material: Brass Spout Swivel: N Suggested Application: Bath Valve Material: Ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

SHOWN IN LUDLOW LOW PROFILE THREE HOLE DECK MOUNTED LAVATORY FAUCET WITH METAL LEVER HANDLES

INSPIRATION

A touch of classic Americana. Our fresh take on iconic industrial design has clean lines and dimensional details.

CODES & STANDARDS

Code # LDLS10Y: Complies with ASME A112.18.1/CSA B125.1, ADA, CEC and 0.25% Weighted Average Lead Content. Certified with IAPMO, cUPC, CEC, State of MA, WRAS and WaterSense.

PRODUCT FEATURES

Push touch USA style drain included.

This item is stocked in a Chrome, Nickel and Unlacquered Brass finishes. Lever Handles

Standard flow rate is 1.2gpm (4.5 L/min) and meets State of California requirements. Also available in other flow options. Contact a sales associate for details.





LUDLOW

Ludlow Low Profile Three Hole Deck Mounted Lavatory Faucet with Metal Lever Handles

