


24V 5A Relay On A Plate

Part No. **BF376**

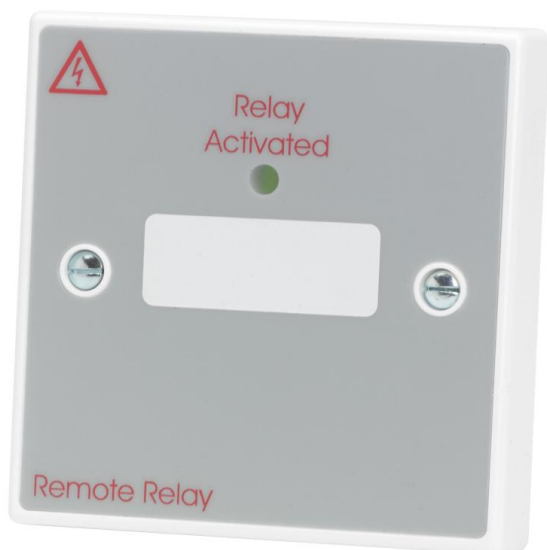

Overview

A general purpose, double-pole, polarised 24V 5A relay designed for use in 24V fire alarm systems.

Incorporates a high intensity LED which illuminates red when the relay is active.

Can be connected to a suitable control panel relay output or a standard polarised fire alarm sounder circuit to operate door retaining magnets, rollershutter doors, etc.

Can be mounted on 25mm flush or surface mount back boxes.

Technical Specifications

Activation current	Typically 30mA @ 24VDC.
Indicators	Red Relay Activated LED.
Connections	+V; -V (Supply); NC; C; NO (SW1 & SW2). Contact rating @ 24VDC is 5A (resistive) 2A (inductive); Contact rating @ 240VAC is 5A (resistive) 2A (inductive)
Product dimensions (mm)	85 W x 85 H x D 27mm (Can be mounted on a standard UK 25mm single gang flush or surface back box).
Construction & finish	White PVC plate; Light grey label; Silver nickel contacts.
IP Rating	IP40.
Weight	78g.
Operating conditions/temperature	-10°C to +60°C.



Comsec Protection Systems.



T 01942 322744 E sales@c-tec.co.uk
F 01942 829867 W www.c-tec.com



C-TEC, Challenge Way, Martland Park, Wigan, WN5 0LD United Kingdom