



Comsec Protection Systems



NC809DB / NC809DM Mk4 Reset Point

Approved Document No: DNU8094100 Rev 3




RC connected to signal.
S signal.
-V common negative.

Reset points can be used to reset ceiling pulls and/or to remotely reset call points (see example configuration below right).

Several reset points can be connected in parallel on the same zone.

- NC809DB Reset Points are button operated.
- NC809DM Reset Points require an NC803M Magnetic Key.

EXAMPLE CONFIGURATION

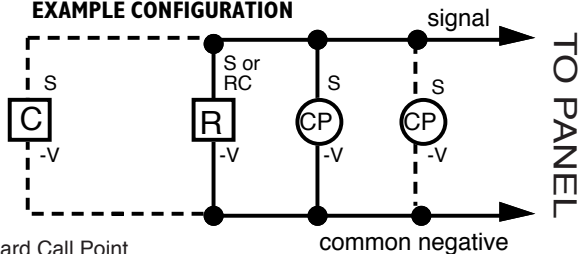

KEY TO DIAGRAM: R = Reset Point; CP = Ceiling Pull; C = Standard Call Point