

Date: _____ Type: _____

Client: _____


Project: _____



INSTRUCTIONS FOR: Using the Universal Connector Pack

Step 1: Confirm the DC voltage required to operate your device. The DC voltage required to operate your device is typically listed on the label of the device's AC Adapter under the term "Output". You may also contact the manufacturer directly for this information.

(输入) INPUT: 100-240V ~
(输出) OUTPUT: 18.5V == 3.5A

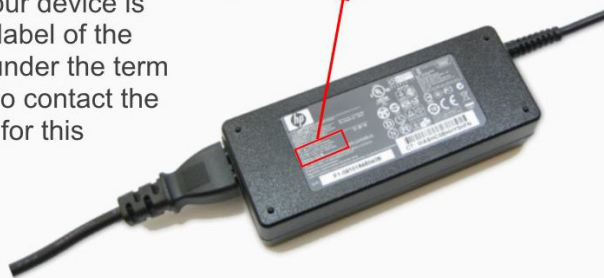

Step 2: Once you confirm the proper DC voltage required to operate your device, please slide the voltage selector on the Mobile Power Center ("MPC") to match your device's required voltage as closely as possible.*



Step 3: Once the proper voltage has been selected on the MPC, select a compatible connector tip and attach it to either end of the enclosed output cable.



Display Supply & Lighting, Inc.

Display Supply & Lighting, Inc.
1247 Norwood Avenue
Itasca, IL 60143 USA
TF 800.468.1488
P 630.285.9660
F 630.285.9670
www.dslgroup.com

Date: _____ Type: _____

Client: _____

Project: _____



INSTRUCTIONS FOR: Using the Universal Connector Pack

Step 4: Plug the modified end of the output cable (with the compatible tip attached) into your electronic device and the other "free end" of the output cable into the green colored port labeled "output" on the MPC.



Step 5: Press & hold the power button on the MPC for roughly 3-5 seconds to engage power.



*** Operating your device at an incorrect voltage may damage your device, so please proceed with caution!**



Display Supply & Lighting, Inc.

Display Supply & Lighting, Inc.
1247 Norwood Avenue
Itasca, IL 60143 USA
TF 800.468.1488
P 630.285.9660
F 630.285.9670
www.dslgroup.com