



Date: \_\_\_\_\_ Type: \_\_\_\_\_


Client: \_\_\_\_\_

Project: \_\_\_\_\_

## CLCTL1555N Track Light

### Wall Lighter - Dual 50/55 Biaxial Line Voltage Fluorescent Fixture

- Single piece extruded aluminum with welded end caps.
- Parabolic, injection molded, chrome specular louver for optimum efficiency and lamp shielding (1/8" extension is standard).
- Louver may be removed without tools during relamping.
- Lockable, precision aiming adjustment.
- 360°+ Horizontal rotation, 180° vertical rotation.
- Integral ON/OFF switch and track polarity indicator are standard.
- No dimming option available
- (2) 50W GE (or 55W Osram/Philips) T5 Lamps, 2G11 base.
- End of lamp life automatic shut-off circuit protection.
- Sound rating of "A" for indoor applications.
- Available in black and white
- cULus listed.
- Suitable for dry locations.

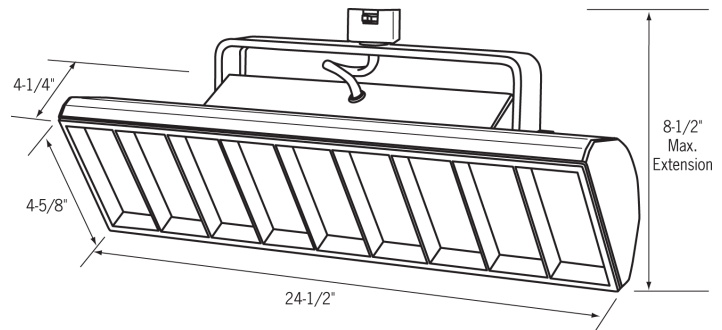

#### Related Products



Track



CLA6 - End  
feed w/ cord &  
plug



CLA2 - Mini  
connector



CLA3 -  
Flexi-connector



CLA12 -  
Straight/L  
connector



CLA15 - T  
connector



Power strips



Display Supply & Lighting, Inc.

Display Supply & Lighting, Inc.  
1247 Norwood Avenue  
Itasca, IL 60174 USA  
TF 800.468.1488  
P 630.285.9660  
F 630.285.9670  
www.dslgroup.com

Copyright © 2013 Display Supply & Lighting, Inc. All rights reserved. All brand or product names are trademarks or registered trademarks of their respective owners. Due to continuous improvements and innovations, specifications may change without notice.