





Welcome and Thank You For 45 Years of Support!



DS&L is a leading supplier of lighting and supply products to the trade show and display industries for over 45 years. In addition to assisting customers with the selection of products that best meet their application needs, DS&L also provides complete lighting layout, application engineering services and on site installation oversight services.

We thank you for your business in the past, appreciate your current support and hope to continue to win your loyalty and trust through outstanding product offerings and service in the future.

This catalog is intended to provide you with an overview of the products and services available from DS&L. A gallery of projects that we have been fortunate to collaborate on with our valued customers is available for viewing under the education tab at [www.dslgroup.com](http://www.dslgroup.com). We hope this serves to spark your imagination and envision the possibilities of designing with light.

It would be impossible for us to put together a catalog that shows all of the products that we have to offer. As we manufacture, and represent a variety of manufacturers as well, DS&L is best to think of as a resource to help in the selection of products to compliment your designs and bring your ideas to life.

With our application engineering, programming and installation oversight services, DS&L offers a unique, turn-key solution of products and services to assist you in all phases of your project! Please also visit our website, [www.dslgroup.com](http://www.dslgroup.com) to download product specification sheets, learn about new products, review our installation gallery and review educational pieces as well.

So, What Can DS&L Design With You? Call or email us and let's explore what we can create together!

We look forward to working with you,

The DS&L Team



## TABLE OF CONTENTS

SkandaLights® arm lights.....	4
Arm Light accessories.....	5
Arm Light clips and clamps.....	6
LED Modular Strips .....	7
LED Slim Line Series.....	8
Micro Profile LED Series .....	9
LED Recessed & Surface Mount Lights .....	10
LED Flex Panels - Standard.....	11
LED Lattice Lights.....	11
LED Rigid Light Panels.....	11
RGB End Cap Lights.....	12
LED Tape 12V .....	13
12V LED Tape accessories.....	14
24V LED Tape.....	15
24V LED Tape Accessories .....	15
COB LED Tapelights.....	15
NEON LED Lights.....	16
Faux Neon LED Signs .....	17
Disk & Recessed Lights .....	18
Track Lighting.....	20
Track Lighting Connectors .....	23
Monorail Track Lighting .....	24
Color Kinetics® Fixtures & accessories .....	25
VELCRO® Brand Products .....	29
Power Management (Cords, Transformers, Outlet Strips) .....	31 to 32
Battery Solutions .....	32
Felt Crate Liner .....	33
Roto Locks .....	33
Snap-Trac.....	33
Application Engineering Services .....	34
Replacement Lamps .....	35

# SkandaLights® Armlights

Designed to deliver brilliant illumination

SkandaLights® LED8822  
High Quality LED Fixture



### LAS VEGAS FRIENDLY

- No exposed LEDs – LED board is recessed in fixture head
- Draws approximately less than 18.1 watts of power
- Light output of generation 3 LED board exceeds a 200 watt linear halogen lamp
- Custom heat sink to properly cool the LEDs
- Power supply with 15' cord
- Over 50 clips & clamps fit base of fixture
- Approximate 16" arm
- Available in black and silver
- ETL listed fixture

SkandaLights® GZ-2004 - Line voltage  
arm light - spot



LV99-0031: Black  
LV99-0041: Silver  
LV99-0031LED  
LV99-0041LED

### LAS VEGAS FRIENDLY

- Rugged metal fixture head
- Round cone shaped design
- 6.5' 3 wire permanently attached power cord
- Available in black or silver
- 50-75 watt GZ lamp included, or for a brighter version - choose the new 530 lumen, 7W - 4000K LED Lamp
- Mounts to virtually any application with over 50 clamp/clip styles available
- Fixture head design aids in dissipation of heat
- ETL listed fixture

SkandaLights® LV-PERF



LVPERF2500BL-PS (Halogen)  
LVPERF2500SV-PS (Halogen)  
LVPERF2500BL-PSLED  
LVPERF2500SV-PSLED

### LAS VEGAS FRIENDLY

- Low voltage arm light - spot
- Rugged perforated metal fixture head
- Fixture head design aids in dissipation of heat
- 10' power cord permanently attached - plugs into a transformer with integrated 3 prong plug
- Available in black or silver
- 50 watt MR-16 covered glass lamp included
- Mounts to virtually any application with over 50 clamp/clip styles available
- ETL listed fixture

SkandaLights®  
SK-Telescope



### LAS VEGAS FRIENDLY

- Telescoping arm light combined with the versatility of a SkandaLights® base
- Mounts to virtually any application with over 50 clip and clamp styles available
- Twin telescoping arms adjust from 9" to 25"
- Arm angles up to 160 degrees and fixture head rotates 330 degrees
- 12 volt transformer with integrated 3 wire plug
- 50 watt MR-16 maximum
- MR16 accessories available
- ETL listed fixture

Convert LV-PERF fixture to work with virtually any LED replacement lamp. See LED Driver Converter listed on Page 9

Convert SK-Telescope fixture to work with virtually any LED replacement lamp. See LED Driver Converter listed on Page 9



## SkandaLights® Armlights

Designed to deliver brilliant illumination

SkandaLights® LV99-003 (black) and LV99-004 (silver) Linear Halogen.



Also available with LED an Lamp

- The only mini washer on the market
- Durable injection molded fixture head
- Extremely light weight
- 10' power cord permanently attached - plugs into a transformer with integrated 3 prong plug • 50 watt bi-pin lamp included
- Over 50 clamps/clip styles available
- Outstanding range of motion allows for direction of light where desired
- Ideal for evenly illuminating a banner stand graphic or up to a 3-1/2" wide area
- ETL listed fixture



Designer Tech DSL-Wave

### LAS VEGAS FRIENDLY

- Lightweight fixture with clean designer appearance
- Wave shaped twin arms are 18" long with 3" arc height
- Fixture head rotates 330 degrees
- Arms slide through clamp to desired mounting position
- Clamp securely mounts to hard surfaces or tubing from 1/2" to 1"
- Mounts to virtually any surface
- 12 volt, 3 wire transformer with integrated 3 wire plug
- Optional MR-16 accessories available
- ETL listed fixture

## Accessories for SkandaLights®

Power Supplies, Multi Outlet Strips, Replacement Glass & Screws

5SPDXSQUIDY - 5 Outlet PowerSquid™



- Conveniently converts a single outlet to multiple outlets with more flexibility than a standard multi outlet strip
  - Converts 1 grounded outlet to 5 grounded outlets

- 5 flexible cords of varying lengths (6" to 10") w/grounded receptacle at the end of each 3' power cord with molded female three wire plug

6SPDXWP3 or 6 - Multi Outlet Power Strip - Plastic



- 6 outlets, all plastic body
- On/off rocker switch with built in circuit breaker
- Maximum rating: 15A, 125V AC
- Available in black or white
- UL listed
- Please call for complete option details and minimum order quantity



P10SCB - SkandaLights® Replacement Cord Set - Black



LEDDRIVERCONV10W

Convert your DS&L MR16 style fixture to work with virtually any LED replacement lamp

- Takes a low voltage fixture that uses a 50 watt halogen MR16 lamp and makes it consistently work with a LED replacement lamp without flickering
- Simply remove the old transformer (which is the plug in device part of the fixture) and use the LED Driver Converter in its place. You can then use any LED replacement lamp (10 watt maximum) with DS&L fixture and have smooth, consistent operation.
- The LED Driver Converter is UL Listed



# SkandaLights® Clips & Clamps

Over 50 Clips and Clamps available.  
Pictured are some of the most common.



**C001, C002, & C005**

Panel or hardwall clips,  
Fixed sizes. Available in  
black or aluminum

C001 - 1/2" Panel Clip  
C002 - 3/4" Panel Clip  
C005 - 1" Panel Clip,  
(black only)



**C007D**

Universal Clip  
Available in black



**C013A**

Nimlok & Alusett Clip  
Available in black



**C020**

Panel or hardwall bar

Available in aluminum  
finish

1" wide, 3" long, screw  
down top of panel or wall  
(screws not included)



**C025MZ**

Octanorm clip  
Available in silver



**C026N**

Designed to work with  
the Octanorm® System  
Available in silver



**C027N**

Agam or Classic Module  
Clip  
Available in silver



**C028S**

Clip for most Skyline  
structures  
Available in black



**C-CLIP29mm**

Designed for use with  
aluminum extrusions with  
29mm holes. Available in  
black



**C034**

Parallel to ground adapter  
Available in black or  
aluminum



**C038D**

Pop-up scissor clip, for  
round 10mm tubing  
Available in black



**C047D**

Pop-up scissor clip, for  
square 8mm tubing  
Available in black



**C048**

Expand® quick or Pronto  
screen clip  
Available in black or silver



**C-99**

For panels 1/4" to 1-1/2"  
wide  
Available in black



**CTC & CTC 2.5**

C-CTCBL - For tubing  
between 1/2" to 1-1/2"  
Available in black

C-CTCBL2.5 - For tubing  
between 1/2" to 2-1/2"  
Available in black



**C-MATRIX**

**C-191**  
For panel 1/2" to 3" wide  
Available in black






## Specialty Lighting

### LED Modular Strip Series

#### Linear LED Fixtures

- A safe, cost effective way to internally light graphics, or uplight or downlight an area, with powerful LED lighting
- Designed to perimeter light graphics as thin as 2" inches deep
- Size: 0.56" tall x 0.9" wide
- No exposed solder joints, making for a more durable wire connection
- Directly mount Modular strips to aluminum frame or extrusion by screwing in place through pre-drilled holes using M4 (4mm or 5/32" dia.) screws. Do not attach with hook & loop products or double sided tape. Insulated washers are attached to LED Modular Strip to avoid damaging circuit board when installing.
- For single or double sided graphic applications, line the internal perimeter of the structure and light up to an 8' x 8' graphic evenly and without hot spots
- Ideal for downlighting a work area or header or uplighting a smaller area as well
- The entire lighting system is UL Listed

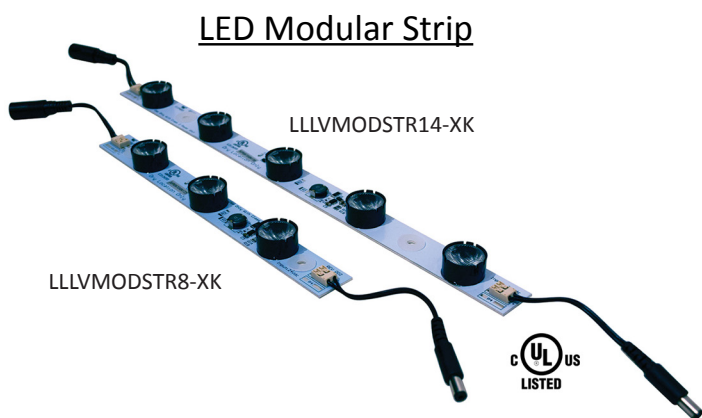

- 24V Plug and play design allows up to 6 long (14.10" long) or 10 short (8.74" long) fixtures (or a combination of up to 30 LED nodes) to be interconnected and run off of a single external class II power supply. When combining long and short strips, never exceed more than 30 nodes per power supply.
- It is recommended that a hardwire power supply be used when installing modular strips into permanent installs. When installing modular strips in temporary installation applications; a plug in power supply is appropriate.
- LLLVMODSTR8-V2: 745 Lumens • LLLVMODSTR14-V2: 1130 Lumens
- High quality, pure white LEDs with custom selected lensing and drivers allows light to spread evenly without hot spots on most materials
- Cool white color temperature (6000K)
- 10° x 50° beam angle



LLLVMODPOWER24V-GVE  
UL Listed 24V Power Supply for LED Modular Strip Series, RGB Modular Strip Series and LED Flex Node Series

### LED RGB Modular Strip



- Single or changing color LED graphic light.
- 24V Plug and play design allows up to 6 long (5-up) or 10 short (3-up) fixtures to be interconnected and run off of a single 96W external class II power supply. When combining long and short strips, never exceed more than 30 nodes per power supply.
- It is recommended that a hardwire power supply be used when installing modular strips into permanent installs. When installing modular strips in temporary installation applications; a plug in power supply is appropriate.
- LLLVMODRGBSTR3: 8W (All colors on)
- LLLVMODRGBSTR5: 12W (All colors on)
- Connectors on each end for daisy chaining multiple modules together using 2", 12" or 48" bridge cables.
- For use with 24VDC power supply and RGB controller (both sold separately).
- High quality, RGB LEDs with custom selected lensing and drivers allows light to spread evenly without hot spots on most materials.

## Specialty LED Lighting

### Slim Line LED Series

Linear LED Fixture - FLEDXXXX



- Perfect for lighting display cases & cabinets, retail environments, cove & soffits, shelves, light boxes, signs, kitchens, baths or trade show exhibits
- Swivel lamp 50° from center to left or right
- Low profile 7/8" W x 1-5/8" H
- Fully dimmable from 0-100% via triac dimmer
- Link-able for continuous lighting (400 W max.)
- High lumen output
- Energy efficient (650 lm/ft @ 8 watts)
- 50,000 hrs maintenance free
- Seven standard lengths from 9-1/8" to 45"
- Easy installation (plug and play)
- Available in 3 color temperatures: 3000K, 4000K & 5000K
- UL Listed

### Slim Line LED "U" Series

Linear LED Fixture - FXLEDXXXX



- Perfect for lighting display cases & cabinets, retail environments, cove & soffits, shelves, light boxes, signs, edge lighting, residential closets, kitchens, baths or trade show exhibits
- Cost effective lighting solution for fluorescent replacement
- Low profile 7/8" W x 1-1/4" H
- Fixed position body / non-dimming
- Link-able for continuous lighting (450 W max.)
- High lumen output
- Energy efficient (460 lm/ft @ 4.5 watts)
- 50,000 hrs maintenance free
- Eight standard lengths from 9-1/4" to 58"
- Available in standard 5000K. Other color temperatures are available upon request.
- UL Listed



- |           |                                |
|-----------|--------------------------------|
| FL3PC3    | 3' 3 wire power cord           |
| FL3PC6    | 6' 3 wire power cord           |
| FL3PC6SW  | 6' 3 wire power cord w/switch  |
| FL3PC12   | 12' 3 wire power cord          |
| FL3PC12SW | 12' 3 wire power cord w/switch |



- |         |                |
|---------|----------------|
| FL3LC02 | 2" Link cable  |
| FL3LC06 | 6" Link cable  |
| FL3LC12 | 12" Link cable |
| FL3LC24 | 24" Link cable |
| FL3LC36 | 36" Link cable |
| FL3LC72 | 72" Link cable |

- FL3PT18 - 18" Pigtail  
 FL3PT36 - 36" Pigtail



FLOGMC - Modular Connector



FLMBS - Mounting Brackets & Screws







**Micro Profile LED Series**      Linear LED Fixture - FLALTXXCW or WW

- Perfect for applications with limited space and provides a seamless light effect from end to end
- 1/2" W x 3/8" H
- Available in six standard lengths from 6" to 34" and offered in 3000K or 5000K color temperatures
- These 24V, dimmable fixtures provide seamless illumination using 90 degree modular connectors and are link-able for continuous lighting effects
- The plug and play design makes these fixtures easy to install on most surfaces and can be installed on metallic surfaces using the recessed built-in magnets at the bottom of each fixture
- <100 Lumens per watt
- UL Listed



LLLVMODPOWER24V-GVE  
 UL Listed 24V Power Supply for LED  
 Modular Strip Series, RGB Modular  
 Strip Series and LED Flex Node Series

FLAL TLC06	Fixture to fixture Linkcord 6"	
FLAL TLC18	Fixture to fixture Linkcord 18"	
FLAL TLC36	Fixture to fixture Linkcord 36"	
FLAL TML90CW	Modular Connector 90° Left	
FLAL TML90WW	Modular Connector 90° Left	
FLAL TMR90CW	Modular Connector 90° Right	
FLAL TMR90WW	Modular Connector 90° Right	
FLAL TMTLT90CW	Modular Connector 90° Left T	
FLAL TMTLT90WW	Modular Connector 90° Left T	
FLAL TMTRT90CW	Modular Connector 90° Right T	
FLAL TMTRT90WW	Modular Connector 90° Right T	
FLAL TMTCT90CW	Modular Connector 90° 3 Way T	
FLAL TMTCT90WW	Modular Connector 90° 3 Way T	
FLAL TMC4W90CW	Modular Connector 90° 4 Way T	
FLAL TMC4W90WW	Modular Connector 90° 4 Way T	

## Specialty LED Lighting

4" LED Swivel Gimbal Light with variable 5 CCT select - 9 watt

WT-GIMBAL4B - Black  
WT-GIMBAL4W - white

- Changeable CCT select (2700K, 3000K, 4000K, 5000K and 6000K)
- Easy to install
- Spring clips hold fixture firmly in place
- Dimmable using triac dimmer
- ETL Listed



LED, Low Profile Surface Mount Puck Light  
SMP-30K-X, SMP-40K-X, SMP-50K-X



- Designed to deliver soft diffused lighting to desired areas
- Easy to install with plug and play connectors
- Each puck includes 36" cord with female connector
- Fixture comes w/interchangeable clear & frosted lenses. To swap out lens, undo screws on back side of puck, remove clear lens, put frosted lens in its place & replace screws.
- LED color temperatures available: cool white (5000K - 5500K), neutral white (4000K) or warm white (3000K)
- Lumen Output: 250 Lm (clear lens), 200 Lm (frosted lens)
- To be used with plug and play power supply 120VAC/12VDC
- Surface mount w/included center mount screw
- Available in black, white, or silver finishes
- 42 LEDs (3W total)
- UL Listed

### Slim LED Recessed Series with 5 CCT Select

4" and 6" Slim Panel, Recessed LED Lights with 5 Color Temperature Select

2700K, 3000K, 3500K, 4000K, 5000K, and 6000K  
WT-EW4C-9  
WT-EW6C-15




- 9 watt or 15 watt - Recessed, Low profile LED panel fixture, allowing your choice of 5 color temperature options by simply setting a toggle switch
- Easy to install and the low profile design allows mounting in confined ceiling areas or soffits
- Spring clips hold fixture firmly in place
- Multiple fixtures can be ganged together using cord liberators (sold separately)
- 4", 9 watt fixture is available with white trim. Optional trim available in brushed nickel (sold separately)
- 6", 15 watt fixture is available with white trim only.
- Dimmable using triac dimmer
- UL Listed




- Optional trims available for 4" Recessed LED Panel Fixture only (sold separately): Brushed nickel, and White (fixture comes with white)

Big 6 / 2 LED - HERALEDBIG6



- Recessed Swivel LED Spotlight
- Especially developed for applications where high light levels of light are necessary or desired.
- Perfect for larger display cases and even for installation in soffits.
- 360° swivel • Recess depth 3", Mounts in 3-5/8" Hole
- Energy Efficient, uses only 7.2W
- Available with cool white or warm white LEDs
- Available in stainless steel
- Attached 79" connecting cable with plug-in connector
- To be used with 350 mA constant current DC converter
- Dimmable using the PSLED/DIM
- UL Listed

High Output Swivel LED Spotlight  
HERALEDH02



- High Output Swivel LED Spot Light
- 3 LED 1 watt lamps in high quality die cast aluminum housing
- Adjustable fixture head directs light where desired
- Color temperatures available – warm white or cool white
- Ideal for illuminating display cabinets, countertops, soffits or for task oriented lighting applications
- Fixture is 2-5/8" outside dimension
- Low heat output
- UL Listed

HERALEDPS10 - HERA LED Power Supply



- New streamlined, small electronic power supply for up to 10W of high-power LEDs
- Attached terminal block for 3 x LED spotlights

HERALEDPS18/DIM - HERA LED Dimmable Power Supply



- Constant current electronic power supply for up to 18W of highpower LEDs.
- Two attached terminal blocks for 3 x LED spotlights each



## Specialty LED Lighting

### LED Flex Panel - Standard

Custom Quoted Product



- Provides high efficacy, 90+ CRI, and smoother dimming reaching dimming levels as low as 1% or lower.
- Great for indoor backlighting projects where a lighting solution that is both thin & bendable may be needed to fit into soft, curving surfaces & spaces.
- Available in 4 color temperatures: 3000K, 4100K, 5300K & 6500K.
- Fully field cuttable.

### LED Lattice

Custom Quoted Product



- Designed to backlight large format graphics and offers powerfully, bright illumination.
- Features a wide beam angle, energy-saving design & consistent, even light output.
- Available in 3 widths, mix & match the standard module sticks & combine them to your desired length for a custom fit that will provide full coverage without hotspots.
- Comes in a standard 6500K color temp. Call for additional options.

### LED Rigid Light Panel



Slim in profile and providing bright and even illumination. Rigid panels are a revolutionary edge-lit light panel technology designed for highly customized and embedded lighting applications, including accent lighting.


- Perfect for illuminating compact and narrow spaces having a slim profile, measuring only 1/4" - 3/8" thick.
- Easy to Install
- Rigid Panels utilize laser-etched dot pattern technology, allowing face material to be positioned on top with little to no gap while maintaining even illumination.
- Available with or without snap frame.
- Color Temperatures: 3000K, 4100K, 5300K and 6500K, with 80+ CRI.
- Custom color temperatures for custom light panels beyond standard color temperatures will be made available upon request.
- Custom sizes and shapes available.
- Custom order product. -- Call for complete details.

## Specialty LED Lighting







### RGB End Cap Lighting Solution

LEDRGBEC39  
LEDRGBEC46  
LEDRGBEC95

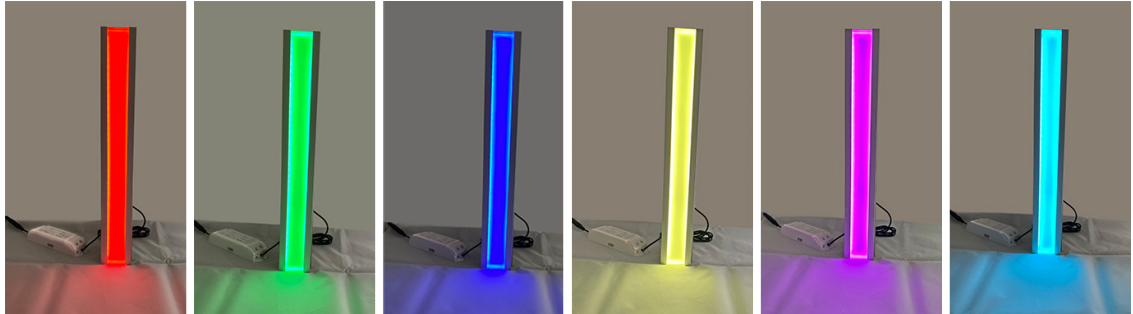

- Standard Sizes - 95", 46" and 39" long (Custom sizes available upon request)
- Only 3/4" deep
- Custom low-profile extrusion houses an RGB programmable LED panel and is easy to install by simply snapping the special plug into a 30mm hole
- Custom extrusion is secured to the special plug with VELCRO® hook and loop VELCOIN® dots

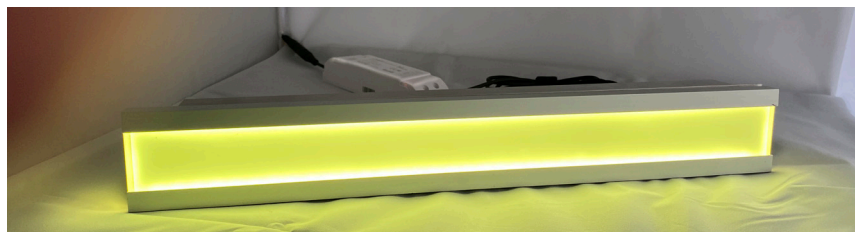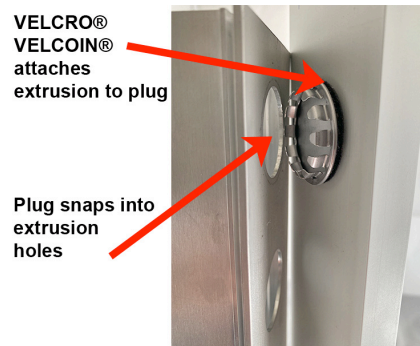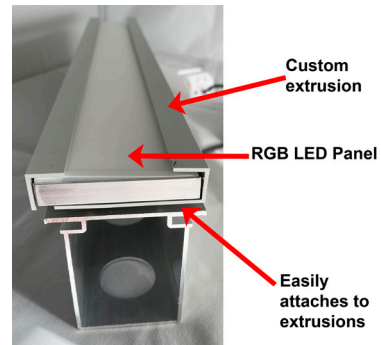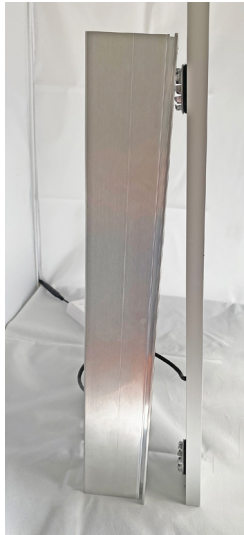



## S-CLLED Tape Light - 12V

- Flexible, low voltage linear LED lighting system provides high quality illumination for many indoor applications including: Display Lighting, Under Cabinet, Cove & Soffit, Accent and Edge Lighting, Back Lighting of smaller graphics & More!
- Modular "plug and play" system - no soldering
- Available in 20' reels consisting of connected, individual 12" or 4" segments. Can also be purchased in individual 12" or 4" segments.
- CLLED Series tapelight is dimmable using any of the CLLED series dimming controls.
- The CLLED tapelight is easy to install using the 3M double sided adhesive on each segment; tape can be directly mounted to most surfaces.
- cCSAus Certified to UL Standards.



### 12V Standard Output - White

Available in 2200K, 3000K, 4000K, or 6500K



### 12V Standard Output - Single Color

Available in blue, green, red and yellow.



### 12V High Output - White

Available in six color temperatures including 2200K, 2700K, 3000K, 3500K, 4000K, or 6500K.



### 12V Super High Output - White

Available in six color temperatures: 2200K, 2700K, 3000K, 3500K, 4000K or 6500K, as well as four colors: blue, green, red and yellow.



### 12V RGB Tapelight


RGB Series tapelights can be programmed for various color changing effects as well as smooth dimming using any of the CLLED series dimming and RGB controls listed on the following page.



### 12V Side Emitting Tapelight

Available in Standard and High Output.

Side emitting LED tape provides one directional light in a low profile. Available in four color temperatures: 2700K, 3000K, 3500K and 4000K

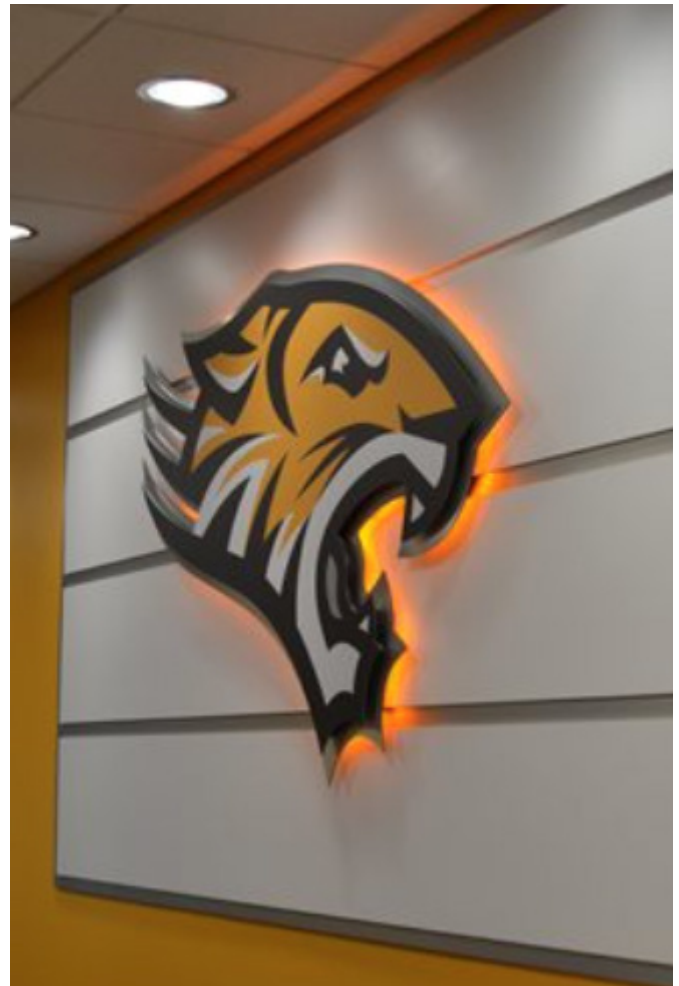

Continuous Run  
Contractor Reels  
Available.  
Call for Details

## LED Tape - Accessories

### 12 Volt System Accessories - (Many more LED Tape Accessories Available. Contact a Customer Service Rep. for details.)

**Plug-and-Play Power Supply**  
S-CLEDDRIVER24, 36 or 60




- 120V/12VAC.
- Available in 24W, 36W or 60W

**Plug & Play Splitters**



- S-CLEDDYCONN - 2-Way
- CLEDDY3CONN - 3-Way

**Input & Output Connectors**

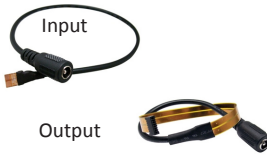

Input

Output

- S-CLEDDPC - Input
- S-CLEDDPT - Output

**Male**




**Female**



- S-CLEDDMALEPC
- S-CLEDDFEMALEPC

**Acrylic Diffusion Lenses**




Clear Lens  
S-CLEDDIFFLENSCL

Frosted Lens  
S-CLEDDIFFLENSFR

- Double Wide clear Lens  
S-CLEDDIFFLENSDWCL
- Double Wide Frosted Lens  
S-CLEDDIFFLENSDWFR

**Aluminum Mounting Channel**

**Standard**




S-CLEDDCHANNELSTD (Aluminum)  
S-CLEDDCHANSTDB (Black)

**Recessed**



S-CLEDDCHANRECESSED (Aluminum)  
S-CLEDDCHANREC-BL (Black)

**Angled**




S-CLEDDCHANANGLE (Aluminum)  
S-CLEDDCHANANGLEBL (Black)

**Round**




S-CLEDDCHANRND (Aluminum)  
S-CLEDDCHANRND (Black)

**Double Wide**




S-CLEDDCHANDBL (Aluminum)  
S-CLEDDCHANDBLB (Black)

**Deep Standard**



S-CLEDDCHANDEEP (Aluminum)  
S-CLEDDCHANDEEPB (Black)

**Ceiling Edge**




S-CLEDDCHANEDGX (Aluminum, Black or White)

**Toe Kick**



S-CLEDDCHANTOEX (Aluminum, Black or White)

**Wall Mount "T"**




S-CLEDDCHANTX (Aluminum, Black or White)

**Side Emitting Standard Channel**




S-CLEDDCHANSIDE (Aluminum)

**Side Emitting "L" Channel**




S-CLEDDCHANSIDEL (Aluminum)

**Mounting Clips**




**Aluminum Mounting Channel - End Caps**


**Standard**



**Angled**



**Double Wide**



**Recessed**




**Deep Standard**



- |                              |                                |
|------------------------------|--------------------------------|
| S-CLEDDCHANSTDEND - Grey     | S-CLEDDCHANSTDENDB - Black     |
| S-CLEDDCHANNEL-ANGEND - Grey | S-CLEDDCHANNEL-ANGENDB - Black |
| S-CLEDDRECCHANEND - Grey     | S-CLEDDRECCHANENDB - Black     |
| S-CLEDDCHANENDRND - Grey     | S-CLEDDCHANENDRNDB - Black     |
| S-CLEDDCHANENDDBL - Grey     | S-CLEDDCHANENDDBLB - Black     |
| S-CLEDDCHANDEEPEPEND - Grey  | S-CLEDDCHANDEEPEPNDB - Black   |

(4) clips & (4) Phillips head screws per pkg. 24" Between clips recommended for most applications.  
S-CLEDDCHANCLIP-STD  
S-CLEDDCHANSTDANGLE  
S-CLEDDCHANCLIP-ANG  
S-CLEDDCHANCLIP-REC  
S-CLEDDCHANCLIP-RND  
S-CLEDDCHANCLIP-DBL  
S-CLEDDCHANCLIP-DBLANG  
S-CLEDDCHANTCLIP




**Wall Mount Bracket (S-CLTLPWM)**  
**Center Support Wall Mount Bracket (S-CLTLPWMC)**


- For use with round mounting channel for the CLEDD Tapelight Series Includes: canopy, elbow, mounting plate, & mounting hardware (Stem and round extrusion sold separately).
- Provides excellent heat sinking and protection to the LEDs while ensuring a clean straight run. • cCSAus Certified to UL standards.
- Not suitable for ceiling mount.




**Connectors**  
Cross Connector - S-CLEDDCONN



**Bridge Connectors -**  
S-CLEDD12CONN - 12" or  
S-CLEDD6CONN - 6"



**Short Female-to-Female Connector**  
S-CLEDDFFCONN



**RGB Connectors**

**Input Power Connector**  
S-CLEDDRGBPC



**Output Power Connector**  
S-CLEDDRGBPT



**RGB Controller with RF Remote Control**

LTRGBCONT





## S-CLLED Tape Light - 24V

### Zig-Zag LED Tape 24VDC

S-CLLEDTZXXK



- LED Tapelight that has a laterally bendable zig-zag design, which provides flexibility in applications requiring bends and arcs.
- Available in standard and high output
- High quality LEDs providing excellent light output at low drive currents, resulting in low power consumption and consistent, stable performance.
- Standard output: 2.5W/ft., 260Lm/ft.
- High output: 3.8W/ft., 385Lm/ft.
- Modular "plug and play" system - no soldering
- Available in (4) color temperatures: 3000K, 3500K, 4000K and 6500K, 80+ CRI
- Dimmable using any of the CLLED series dimming controls
- Available in 20' reels consisting of connected, individual 12" segments. Can also be purchased in individual 12" segments.
- Each segment includes male and female connector ends for continuous linear installations.
- The CLLED tapelight is easy to install using the 3M double sided adhesive on each segment; tape can be directly mounted to most surfaces.
- cCSAus Certified to UL Standards.

### LED Flexible Tapelight - 24V

- Commercial grade modular lighting system featuring a wide range of plug-together accessories and a variety of control options, eliminating the need for field soldering.

- Made of highly flexible material that can be applied to most accessible surfaces using 3M® double-sided tape.
- Sold in 12" segments
- No ultra violet (UV/IR) radiation. No mercury
- Lamp life 50,000 hours
- UL Listed

#### 24V Standard Output Single Color

Available in Red, Yellow, Green or Blue



#### 24V Standard Output - White

Available in Color Temperatures: 3000K-3300K, 4000-4300K or 6000-6500K



#### 24V High Output - White

Available in color temperatures: 3000-3300K, 4000-4300K or 6000-6500K



#### 24V Color Changing - RGBW

• LEDs with individual red, green & blue & white diodes in each



#### 24V Color Changing - RGB

- Ultra bright surface – mount RGB LEDs.



### 24 Volt System Accessories - (Many more LED Tape Accessories Available. Contact a Customer Service Rep. for details.)

#### Plug-and-Play Power Supply




S-CLLEDDRIVER36/24  
S-CLLEDDRIVER60/24  
S-CLLEDDRIVER96/24

#### 24V Hardwire Power Supply



S-CLLEDDRIVER60/24EN  
S-CLLEDDRIVER96/24EN

#### Input & Output Connectors



S-CLLEDPC12-24

Output

S-CLLEDPC12OUT-24

#### Connectors


Cross Connector - S-CLLEDRGBWCRCNN



Bridge Connectors - 2", 6" 12"  
S-CLLEDRGB2CONN-24 - 2"  
S-CLLEDRGBCONN-24 - 6"  
S-CLLEDRGBWCNN-24 - 6"



## COB LED TAPELIGHTS

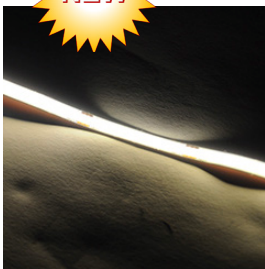

LUXCOBWXXK\*R

- Seamless, continuous illumination with minimal hotspots
- Flexible silicone body that acts as a diffuser lens.
- Available in 5m Reels (480 LEDs), or cut to size.
- Higher chip density, provides greater brightness, flexibility & evenness of light output at an economical price point.

- Standard color temperatures: 3000K, 4100K, 5300K, & 6500K. Custom Color Temperatures available upon request.
- Flexible silicone body that acts as a diffuser lens.
- Optimal Color Rendering - CRI 90+.
- Wide 180 degree beam angle for full coverage illumination.
- Continuous lighting effect ensures minimal hotspots.
- Field cuttable
- Designed w/quick-disconnect barrel connectors for easy installation & have a peel & stick 3M self-adhesive backing for easy mounting.
- UL Listed

### Custom Quoted Products



LUXCOBRGB\*R

- Seamless, continuous illumination with minimal hotspots
- Flexible silicone body that acts as a diffuser lens.
- Available in 5m Reels (840 LEDs), or cut to size.
- Higher chip density, provides greater brightness, flexibility and evenness of light output at an economical price point.

- Wide 180 degree beam angle for full coverage illumination.
- Greater color options with RGB tricolor color mixing.
- Continuous lighting effect ensures minimal hotspots.
- High density LEDs provides continuous light output even in shallow mounting locations.
- Field cuttable.
- Designed w/quick-disconnect barrel connectors for easy installation & have a peel & stick 3M self-adhesive backing for easy mounting.
- UL Listed

## NEON LED Lights

### Custom Quoted Products

#### NEON Slim LED Flex Tube Light - Static White)

Side Bend,  
Indoor/Outdoor Series



Neon Slim LED Flex Tube is a super slim neon tube that bends sideways in a lateral motion.

- Slim, Front-facing accent light.
- Much slimmer than average light tube.
- Provides hot-spot-free, front-facing directional accent lighting at 90+ CRI.
- Easy installation using plastic mounting, clips.
- Fully field cuttable with short cutting segments every 0.98" (25mm) for 12V or every 1.97" (50m) for 24V
- Standard Color Temperatures 3000K, 4100K, 5300K, 6500K -- Custom Color Temperatures Available Please call for more information.
- UL Listed

#### NEON Classic

Side Bend, Indoor/Outdoor Series



Neon Classic is designed to provide a continuous, even line of light without hotspots to meet the needs of today's modern architectural and signage applications.

- With Neon classic you can bend, flex, cut, and contour tubes for desired application.
- Easy to install - plug and play.
- Field cuttable every 2". Cut with knife or recommended cutting tool.
- Field bendable and may be laterally flexed or curved to fit your application.
- May be mounted with mounting clips or mounting channel. Mounting clips and channels must be secured onto a surface with screws before NEON Classic can be pushed into it to complete the installation.
- Standard Color Temperatures 3000K, 4100K, 5300K, 6500K, red, yellow, green or blue.
- UL Listed

#### NEON LED Mini Tape Light - (Static White)

Top Bend,  
Indoor/Outdoor Series




Neon LED Mini Tape is cuttable, flexible LED neon tube light that acts like an LED tape light.

- Bends in an up and down, convex formation.
- Features 90+ CRI, a wide beam angle, and hot-spot-free illumination.
- This super slim, like LED Tape, is provided with an adhesive backing that peels off to reveal short field cuttable segments. Simply place in the mounting channel and plug in for easy installation.
- Standard Color Temperatures 3000K, 4100K, 5300K and 6500K -- Custom Color Temperatures Available Please call for more information.
- UL Listed

#### NEON LED RGB

Side Bend,  
Indoor/Outdoor Series

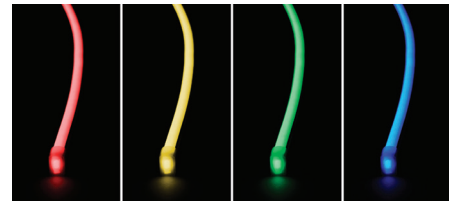

Neon LED RGB is designed to create a colorful, continuous line of light for curved spaces.

- Neon LED RGB is bendable, flexible, and a cuttable solution that can contour to your curved architectural spaces and applications.
- Easy to install - plug and play.
- Field cuttable every 2.28". Cut with knife or recommended cutting tool.
- Field bendable and may be laterally flexed or curved to fit your application.
- May be mounted with mounting clips or mounting channel. Mounting clips and channels must be secured onto a surface with screws before NEON RGB can be pushed into it to complete the installation.
- UL Listed





## Faux NEON LED Signs

Custom Quoted Products




- Perfect replacement for traditional glass tube neon signs.
- Maximum size: 8' x 4'.
- Available in multiple single color choices and RGB.
- More durable than neon.
- Optional dimmable control system.
- Made in the US.
- Cuttable at any place.
- Silicone Neon tubing is 6mm wide to completely cover the LEDs.
- Covers the LEDs to diffuse the light and create a smooth neon effect.
- 11 Colors: white, yellow, lemon yellow, orange, ice blue, blue, green, purple, pink, light pink, red.
- 30 different font choices.
- Shape of sign can be cut to rectangle, cut to shape or an invisible cut.
- Mounting options: hanging cables, wall mount kit or stands for table top displays.

### Single Stroke



### Double Stroke

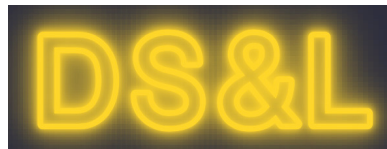

### Backing Material Options (stocked):

- 1/4' clear acrylic
- 3/8" clear acrylic
- 1/4" black acrylic
- 3/8" black acrylic
- 3/8" polycarbonate

### Shapes:



Cut to Rectangle



Cut to Shape  
(Contour Cut)



Invisible Cut  
(Minimized Backing)

## Mounting Accessories

### Hanging Cables

- 6 ft. Aircraft cables
- One set has cables



### Wall Mount Kit

- Screws, standoffs, and wall anchors



### Stands (for table top display)

- Custom cut legs for the bottom of the sign.
- Max sign height is 24".




### Font Options:

1) <i>alexa</i>	6) <i>lovenote</i>	11) <i>amanda</i>	16) <i>melbourne</i>	21) <i>amsterdam</i>	26) MONACO
2) <i>austin</i>	7) NEONLITE	12) <i>avante</i>	17) <i>neonscript</i>	22) <i>barcelona</i>	27) NEONTRACE
3) <i>bayview</i>	8) <i>neotokyo</i>	13) <i>beachfront</i>	18) <i>newcursive</i>	23) <i>buttercup</i>	28) <i>northshore</i>
4) <i>chelsea</i>	9) <i>rocket</i>	14) <i>classictype</i>	19) <i>royalty</i>	24) <i>freehand</i>	29) <i>signature</i>
5) <i>freespirt</i>	10) <i>typewriter</i>	15) <i>greenworld</i>	20) <i>vintage</i>	25) <i>hamilton</i>	30) WAIKIKI

## Disk & Recessed Lights - Low Voltage

A sampling of the many housing and trims available

VL-T-JTH06-X  
4" Recessed Fixture with  
Adjustable Gimbal Trim

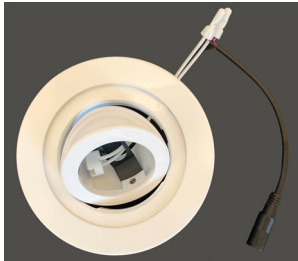

- 4" Recessed Fixture with adjustable gimbal trim
- Butterfly spring wings for recessed installation
- Available in matte black (TJ-TH06-B) or matte white (TJ-TH06-W)
- MR16 style socket attached to 6" barrel connector for easy plug and play connection to power supply (sold separately)
- LED or Halogen lamp sold separately



HR837  
Low Voltage Recessed Light



- Low voltage, low profile recessed light
- 3" miniature gimbal ring adjustable style trim
- Mounting clips allow for easy installation in materials up to 3/4" thick
- Lamp attaches to socket and securely attaches to retention clips in trim
- Quick disconnect plugs into DS&L's 60 watt plug in transformer
- 50 watt MR16 maximum
- Available in black, white and brushed nickel
- UL Listed

CLLVR316-TR  
Low Voltage Recessed Housing  
w/transformer



- Recessed downlight remodel style housing
- Low silhouette design for remodeling applications in solid or suspended ceilings.
- Narrow fixture for fast installation through ceiling opening minimizes remodeling mess.
- Retractable mounting clips lock fixture in place and adjust for different ceiling thicknesses from 1/2" to 1"
- cCSAus Certified. Suitable for damp locations

CLCTR306P  
Trim for 3" Low Voltage Recessed Housing



- Surface adjustable; white trim with black baffle
- Recessed housing required - use with CLLVR316-TR housing
- 40° vertical adjustment, 359° rotation.
- Regressed black baffle reduces surface brightness
- Trim ring outside diameter is 4-1/4"
- 50 watt MR16 lamp maximum
- Flat, stainless mounting clips hold trim firmly to ceiling.
- UL Listed



## Disk & Recessed Lights - Line Voltage

A sampling of many housing and trims available

CLRL38S-R - UL Listed  
6" Incandescent shallow  
remodel recessed downlight



- White steel housing
- Easy installation in materials ranging from 1/2" to 1-1/2" thickness
- Housing requires 3" minimum clearance in insulated ceilings
- Adjustable socket mounting plate (vertical position)
- Many different trims are available to complement any design style
- UL Listed. Suitable for damp locations

### Trims for CLRL38S-R Housing Series

CLCTR3008-P



- White adjustable eyeball trim
- 60W PAR30 Max.
- 35 degree adjustable
- Trim outside dia: 8"
- UL Listed

CLCTR3009WHT



- White regressed eyeball trim
- 60W PAR30 Max.
- 30 degree adjustable
- Trim outside dia: 7-1/2"
- UL Listed

CLCTR3007 (4" inside dia.)

CLCTR3807 (4-3/4" inside dia.)



- Adjustable regressed gimble ring
- (3007) 60W PAR30 max.
- (3807) 80W PAR38 max.
- 7-1/2" outside dia.
- UL Listed
- CLCTR3007P: black baffle w/white trim
- CLCTR3007-WHT: white baffle w/white trim
- CLCTR3807P: black baffle w/white trim
- CLCTR3807WHT: white baffle w/white trim

CLCTR3001 (7-1/2" outside dia.)

CLCTR3801 (7-3/4" outside dia.)



- (3001) 60W PAR30 max.
- (3801) 80W PAR38 max.
- Trim inside dia: 5-3/4"
- UL Listed
- CLCTR3001P: black baffle w/white trim
- CLCTR3001WHT: white baffle w/white trim
- CLCTR3801P: black baffle w/white trim
- CLCTR3801WHT: white baffle w/white trim

CLRL20-R - UL Listed  
Line voltage housing



- Retractable mounting clips allow for easy installation in materials ranging from 1/2" to 1" thick
- Requires 3" minimum clearance in insulated ceilings

### Trims for CLRL20-R Housing Series

CLCTR2001 - UL Listed  
Line Voltage Trim



- Mini recessed down light trim
- Deep set baffle reduces glare and conceals lamp
- Trim outside diameter is 4-7/8"
- 50W PAR20 or 60W PAR16 lamp maximum
- Available in white

CLCTR2008 - UL Listed  
Line voltage



- Mini recessed eyeball trim with 30° vertical adjustment
- Deep set baffle reduces glare and conceals lamp
- Trim outside diameter is 4-7/8"
- 50W PAR20 or 60W PAR16 lamp max.
- Available in white

CLRL530 - UL Listed. Line Voltage Recessed  
Housing uses PAR style lamps



- Easy installation in materials ranging from 1/2" to 1" thick
- Housing requires 3" minimum clearance in insulated ceilings
- Housing requires 5-3/4" opening and measures 7-1/2" H, 12-1/4" total width and 5-5/16" D

### Trims for CLRL530 Housing Series

CLCTR53001 - UL Listed  
Line Voltage Trim



- Baffle downlight trim with 2 stage yolk for short & long neck PAR 30 lamps
- Trim outside diameter is 6-1/2"
- Available in white finish only
- 75W PAR30 lamp maximum

CLCTR53008 - UL Listed  
Line Voltage Trim



- Recessed eyeball trim with adjustment to direct light
- 35° vertical adjustment and 358° horizontal positioning
- Trim outside diameter is 7-1/4"
- Available in white finish only

## Track Lighting

A Sampling of the hundreds of track heads available

Single Circuit Line Voltage Track  
CLLT2, 4, 6 or 8



- Low profile track cross-section; an economic solution for most applications
- Many configurations possible
- 120V/20A rated commercial grade track sections
- Available in straight pieces of 2', 4', 6' or 8' lengths
- Available in white, black or silver finishes
- Track allows fixtures to be located and re-located where desired along track run
- Wide variety of line and low voltage fixture heads and lamp styles available
- Ideal for accenting, highlighting or enhancing any design application
- The ultimate in flexible lighting system
- UL listed

CLCTL603 Track Light - Line voltage  
half-yoke  
mounting  
design



- Universal economy side swivel with exposed lamp
- CLCTL-603 is designed for use with PAR30 long neck lamp
- CLCTL-603A is designed for use with PAR30 short neck lamp
- PAR16, 20, 30 or 38 lamps recommended
- Fixture available in black, white or silver
- Versatile multidirectional line voltage fixture
- Holds desired position securely
- Uses variety of lamp styles to deliver desired effects
- UL listed fixture

CLCTL600 Track Light  
Line voltage  
universal  
design



- Universal lamp holder with exposed lamp has adjustable socket position for proper seating of various lamp types
- Slim line stem with stable positioning to direct light where desired
- 250 watt PAR 38 lamp max.
- Fixture available in black, white, silver, polished chrome or polished brass finishes
- Versatile multidirectional line voltage fixture
- Holds desired position securely
- Uses variety of lamp styles to deliver desired effects
- UL listed fixture

CLCTL610 Track Light -  
Universal design - line voltage  
fixture



- Universal lamp holder with exposed lamp has adjustable socket position for proper seating of various lamp types and shades
- Fixture measures 7" high x 4-3/4" deep x 4-3/4" dia.
- 75 watt PAR 30 lamp recommended or LED option available
- Fixture available in black, white or silver
- Versatile multidirectional line voltage fixture
- Holds desired position securely
- Uses variety of lamp styles to deliver desired effects
- UL listed fixture

CLCTL330 Track Light - Line voltage  
contemporary  
step-back  
cylinder



- Contemporary step-back styling
- Deep, black phenolic baffle to provide glare control
- 75 watt PAR 30 lamp max or LED option
- Available in black or white
- Versatile multidirectional line voltage fixture
- Holds desired position securely
- Uses variety of lamp styles to deliver desired effects
- UL listed fixture

CLCTL2220 Track Light  
Compact round  
back cylinder



- Compact round back cylinder with enclosed lamp and yoke mount
- Deep set black baffle conceals lamp and reduces glare
- Ideal for accent lighting in retail, commercial, or residential settings
- 50W PAR20 lamp recommended or LED option available
- Available in black or white
- Versatile multidirectional line voltage fixture
- Holds desired position securely
- Uses variety of lamp styles to deliver desired effects
- UL listed fixture



## Track Lighting

A Sampling of the hundreds of track heads available

CLCTL2130 Track Light - Line voltage  
flat back  
cylinder



- Compact flat back cylinder conceals lamp and reduces glare
- Slender stem mount
- Precise aiming and 350° rotation
- 75W Par30 lamp recommended or LED option available
- Available in black or white
- Versatile multidirectional line voltage fixture
- Holds desired position securely
- Uses variety of lamp styles to deliver desired effects
- UL listed fixture

CLCTL830 Track Light - Line Voltage  
Gimble ring  
style



- PAR30 gimble fixture with yoke mount
- Designed for maximum horizontal and vertical swivel for excellent aiming
- 75W PAR 30 lamp recommended
- Fixture available in white and black. Call for other finish options
- Versatile multidirectional line voltage fixture
- Holds desired position securely
- Uses variety of lamp styles to deliver desired effects
- UL listed fixture

CLCTL530 Track Light - Line voltage  
classic bell shape



- PAR30 classic bell shape fixture with black baffle to reduce glare and yoke mount
- Fixture design conceals lamp
- 75 watt PAR30 lamp recommended or LED option available
- Fixture available in white or black
- Versatile multidirectional line voltage fixture
- Holds desired position securely
- Uses variety of lamp styles to deliver desired effects
- UL listed fixture

CLCTL8038 Track Light - Line voltage  
double yoke  
design



- Modern cylindrical fixture with open design for cooler operation and front re-lamping
- Dual-rail yoke provides accurate aiming and holds fixture in desired position
- 250 watt PAR38 lamp maximum or LED option available
- Fixture available in white, black, silver or unfinished aluminum
- Versatile multidirectional line voltage fixture
- Holds desired position securely
- Uses variety of lamp styles to deliver desired effects
- UL listed fixture

CLCTL540 Track Light - Line voltage  
classic bell  
shape



- PAR38 classic bell shape fixture with black baffle to reduce glare and yoke mount
- Fixture design conceals lamp
- PAR38 lamp recommended or LED option available
- Uses variety of lamp styles to deliver desired effects
- Versatile multidirectional line voltage fixture
- Holds desired position securely
- Available in black or white
- UL listed fixture

CLCTL5038 Track Light - Line Voltage  
Drama  
fixture



- Drama fixture with stepped back design and yoke mount
- Fixture design conceals lamp
- 250W PAR38 lamp recommended or LED option available
- Available in black, white or silver finishes
- Versatile multidirectional line voltage fixture
- Holds desired position securely
- Uses variety of lamp styles to deliver desired effects
- UL listed fixture

## Track Lighting

A sampling of the hundreds of track heads available

CLCTL116T  
Track Light -  
Low voltage  
perforated metal  
back cylinder



- Round back cylinder with a perforated steel back
- Double steel yoke holds fixture in desired position securely with two knobs
- Transformer concealed in a polycarbonate housing
- 50 watt MR16 maximum
- Fixture available in black, white or silver
- Uses MR16 lamp for good white light output
- High tech look
- Versatile multidirectional low voltage fixture
- Holds desired position securely
- Uses MR16 lamp for good white light output
- UL listed fixture

CLCTL916 Track Light - Low voltage  
tapered  
back style



- Rear open design allows for efficient lamp heat dissipation
- Two piece housing for convenient front re-lamping
- Versatile aiming capability to achieve any desired accent lighting effect
- 75W MR16 lamp maximum or LED option available
- Requires CLLA2050N or to use with various LED MR16 Lamps, use CLLA2050NLB transformer
- Available in white or black finishes
- Holds desired position securely
- Uses MR16 lamp for good white light output
- UL listed fixture

CLCTL816 Track Light -  
Gimble Ring



- Gimble ring with side set yoke to provide accurate aiming
- 50W MR16 lamp maximum or LED option available
- Requires CLLA2050N or to use with various LED MR16 Lamps, use CLLA2050NLB transformer
- Available in black, silver or white
- Versatile multidirectional low voltage fixture
- Holds desired position securely
- Uses MR16 lamp for good white light output
- UL listed fixture

CLCTL9016 Track Light - Low voltage  
Theatrical  
fixture



- Theatrical fixture with built in barn doors to provide additional cut off and control of light
- Transformer concealed in yoke (included)
- 75W MR16 lamp maximum or LED option available
- Fixture available in white, black or silver
- Versatile multidirectional low voltage fixture
- Holds desired position securely
- Uses MR16 lamp for good white light output
- UL listed fixture

CLCTL216 Track Light - Low voltage  
round back  
cylinder



- Mini round back cylinder with black baffle to control glare
- Side yoke holds fixture securely to provide accurate aiming of fixture
- 50W MR16 lamp maximum
- Requires CLLA2050N or to use with various LED MR16 Lamps, use CLLA2050NLB transformer
- Available in black or white
- Versatile multidirectional low voltage fixture
- Holds desired position securely
- Uses MR16 lamp for good white light output
- UL listed fixture

CLLA2050  
Electronic transformer  
- 50W

CLLA2050NLB  
60W Transformer  
that works with  
various LED  
MR16 lamps





- Transformer for low voltage fixtures
- Available in black, white or silver finishes
- Allows for the use of low voltage fixtures without having to wire to a remote transformer
- Low profile transformers do not detract from the lighting system appearance
- Provides flexibility in the design of the lighting system
- UL listed fixture



## Track Light Connectors

Create additional flexibility for lighting systems

- UL Listed

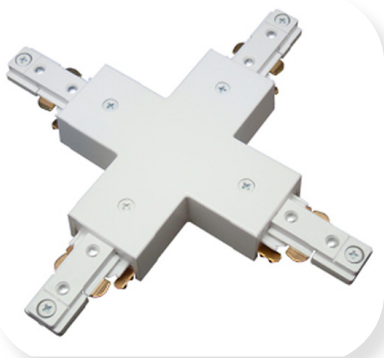

### CLLA2

Mini-connector / straight connector

2-11/16" long x 1-1/2" wide

Available in black, white or silver

### CLLA3

Flexible connector

Accordion like center section allows for making of radiuses

5-7/8" long x 1-3/8" wide

Available in black or white

### CLLA6

End Feed with 3 wire 15' cord & grounded plug

3-1/4" long and 1-3/8" wide

Available in black or white

10 amp max



### CLLA7

Floating feed

Available in black, white or silver

### CLLA8

Conduit end feed

4-5/8" long x 1-1/2" wide

Available in black, white or silver

### CLLA9

End feed kit with cover for use with an outlet box mount

Connector dimensions are 4-3/16" square

Available in black, white or silver

### CLLA10

End feed connector (top access)

May also be used as a feed point for hardwire applications


Available in black, white or silver

### CLLA12

Straight/L connector - can be set for right, left or straight applications

Each side of "L" is 2-3/4" long x 1-3/8" wide

Available in black, white or silver



### CLLA13

T-connector allows for the joining of 3 pieces of track

Each side of "L" is 4-1/8" long x 2-3/4" wide

Available in black, white or silver

### CLLA16

Grounded Outlet. Integral on/off switch, track polarity indicator

Max. 5 Amp capacity

Not UL Listed

Available in black or white

### CLLA17

Pendant adapter; 10 lbs. max.

Available in black or white

### CLLA18

Mono point adapter

1/4" high x 4-7/8" Dia.

Available in black, white or silver

## Monorail Track Lighting

A sampling of the monorail track and fixtures available  
OTHER MONORAIL OPTIONS AVAILABLE - CALL FOR DETAILS

CLLIR424 2, 4, 6 or 8 - Monorail Flexible track system



- Odyssey line voltage rail
- Available in 2', 4', 6' and 8' lengths with end caps and is 1" high
- Constructed of anodized aluminum with insulated connectors and a copper ground
- Field curvable to a minimum 12.5" radius
- Available in Antique Bronze and Silver
- Odyssey line voltage rail is a dynamic system that allows for extreme creativity and design
- Curving machine allows for customers to bend rail the way they want
- Wide variety of adjustable accessories allow for the designing of unique lighting solutions
- UL listed

CLLIR7246 Track Pendant



- Odyssey Track Pendant For Gravity-Fit Shades
- Bicycle cable wiring cover keeps cord straight for clean appearance
- May be modified for shorter lengths
- Shades sold separately
- 40W maximum
- Available in Antique Bronze and Silver
- Odyssey line voltage rail is a dynamic system that allows for extreme creativity and design
- Great white light output for illuminating dynamic displays
- Wide variety of adjustable accessories allow for the designing of unique lighting solutions
- UL listed

CLLIR4537 Track Light  
Low voltage rail modern style fixture



- 12V Risa fixture with ring
- Fixture is 3" long x 2-3/8" Dia.
- 50 watt max, MR16
- Available in silver
- Odyssey rail is a dynamic system that allows for extreme creativity and design
- Great white light output for illuminating dynamic displays
- Wide variety of adjustable accessories allow for the designing of unique lighting solutions
- UL listed fixture

CLLIR140T Track Light -  
Line voltage rail slimline fixture



- Fixture is 3.44" long and 2.06" wide
- Swivel joint allows for good range of adjustment
- Low voltage fixture with integrated transformer
- Available in silver
- 50 watt MR16 lamp with front glass recommended
- Star shades are available in multiple colors
- Line voltage rail is a dynamic system that allows for extreme creativity and design
- Great white light output for illuminating dynamic displays
- Wide variety of adjustable accessories allow for the designing of unique lighting solutions
- UL listed fixture







# COLOR KINETICS

## Color Changing

High Quality LED Products

ColorBurst Powercore gen3, Intellihue  
CK-423-000029-XX



- Exterior architectural and landscape spotlight with high-quality, intelligent white and color-changing light all in the same luminaire.
- Produces high quality white, pastel, and saturated color light.
- Delivers exceptional CRI and the ability to choose any CCT between 2000K and 10000K.
- In addition to the native 6° lens, six different spread lenses can customize the fixture to produce 10°, 20°, 40°, 60°, 80°, and 10°x40° (asymmetric) beam angles.
- Housing colors available: black, gray and white. (option to add a louver, full glare shield and half glare shield)
- UL Listed

ColorBlast Powercore gen5 RGBW  
CK-423-000027-XX




- High performance linear LED fixture that combines white & rich, saturated, color & color-changing effects with simplified installation.
- Wide range of accessories available that allow for customizable beam angles for floodlighting, spotlighting, wall washing and grazing.
- Available in black, gray and white
- Universal power input range of 100-277 VAC.
- Rugged die-cast aluminium housing.
- UL Listed

ColorGraze MX4  
RGBW or RGBA Light  
CK-423-000001-XX



- High-performance, exterior linear luminaire designed to highlight architectural features ranging from surface textures and molding details to archways and windows.
- Wall grazing, Wall Washing
- Available in 1' and 4' lengths.
- Beam Angle 9°X9°, 10°X60°, 15°X30°, 30°X60° or 60°X30°.
- Lumens per foot: 543 to 655
- LED Channels: Red/Green/Blue/Amber, Red/Green/Blue/White
- Low profile housing.
- Easy to install and operate.
- UL Listed

PureStyle Intelligent  
Color Powercore RGBA  
CK-123-000026-XX

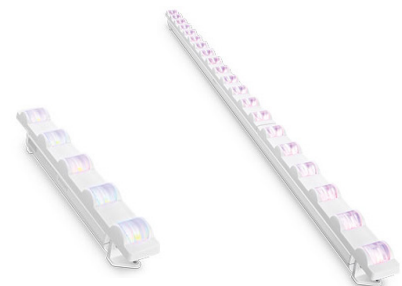

- Excellent choice for a wide range of interior applications from cove to wall-washing and backlighting
- Compact, with an innovative design
- Fixtures are easy to install and offer tunable white and dynamic color light.
- Available in 1 foot and 4 foot lengths and comes available in a range of beam angles (medium, narrow and wide)
- Offers exceptional beam quality, while delivering bright, smooth light
- Input voltage: 100 to 277 VAC, auto-ranging, 50/60 Hz
- UL Listed

ColorBlast Powercore gen5, Intellihue  
CK-423-000026-XX



- High-performance LED fixture that produces high-quality white, pastel and saturated color light, in the same luminaire.
- Delivers exceptional CRI and the ability to choose any CCT between 2000K and 10000K.
- Wide range of accessories available that allow for customizable beam angles for floodlighting, spotlighting, wall washing and grazing.
- Rugged die-cast aluminium housing.
- UL Listed

# COLOR KINETICS

## Color Changing & White Light

### High Quality LED Products

eW Burst Compact Powercore  
CK-523-000059



- Compact, exterior-rated LED lighting fixture designed for accent and site lighting.
- Architectural and Landscape versions deliver high-quality white light output
- Integrates patented Powercore technology to directly accept line voltage, dramatically simplifying installation and lowering total system cost
- Optional glare shields block spill light, while honeycomb louvers limit the spread of light for a more focused and intense beam
- Fixtures can tilt through a full 180°, and Architectural fixtures can also rotate through a full 360° for precise aiming
- Rugged, die-cast aluminum housing
- UL Listed

eW Burst Powercore - Gen 3  
CK-523-000111-XX



- High-output, exterior-rated LED lighting fixture designed for accent and site lighting.
- Architectural and Landscape versions deliver high-quality white light output in 3000K, and 4000K to support a range of uplighting, floodlighting, and decorative lighting applications.
- Housing color choices: black, gray, and white
- Integrates patented Powercore; technology to directly accept line voltage, dramatically simplifying installation and lowering total system cost
- Optional glare shields block spill light, while honeycomb louvers limit the spread of light for a more focused and intense beam
- UL Listed

eW Blast Powercore gen5  
CK-523-000110-XX



Optional lens and lens holder available

- LED lighting fixture that provides a high-intensity wash of white light with simplified installation.
- Offers wide range of accessories that allow for customizable beam angles for flood lighting, spotlighting, wall washing, and grazing.
- Ideal for applications as diverse as highlighting architectural features, general site illumination, & lighting signage & retail spaces.
- Offers efficiency and cost-effectiveness of Powercore technology in a rugged die-cast aluminum housing.
- Housing colors available: black, gray and white
- Rugged, die-cast aluminum housing
- UL Listed

ReachElite High Punch Powercore, eW - gen2  
CK-523-000104-00



- ReachElite High Punch is a premium exterior long-throw floodlight with single temperature white light.
- Designed to light large-scale outdoor structures ranging from bridges and facades to monuments and skyscrapers.
- Powerful enough to hit targets up to 564 m (1,852 ft) away with the 300 w luminaire
- Delivers high-quality white light exactly where you want it
- UL Listed



# COLOR KINETICS

## White Light

High Quality LED Products

### eW Cove QLX Powercore

12" - CK-523-000108-XX  
48" - special order



- Low-profile fixture delivers a high quality and quantity of white or solid color light at an affordable price
- Ideal for alcoves, display cases, light boxes, and other tight spaces
- Designed to replace conventional cove lights for wall & ceiling glow effects, wall washing, and indirect lighting from a single cove
- Delivers solid white or colored light at up to 300 lumens per foot
- Available in four color temperatures, 2700K, 3000K, 3500K and 4000K,
- Lengths of 12 in, along with wide and medium beam angles. (Available in 48" - special order)
- UL Listed

### eW Graze MX, and QLX Available in 1', 2', 3' or 4' lengths



- Powerful white light source designed for wall grazing/washing, accent & sign lighting
- MX - Most light output, QLX - Perfect for applications calling for balance of cost & performance.
- 2700K, 4000K, or 5500K color temps avail.
- MX & QLX comes with standard 9°, 10°, 15°, 30° or 60° beam angles
- Low-profile aluminum housing and flexible mounting options allow discrete placement in compact architectural details
- Incorporates Powercore® technology to directly accept line voltage, eliminating the need for external power supplies
- UL Listed

### eW Cove MX Powercore Superior light output CK-523-000050-XX



- Superior light output, wide beam angle, and a range of color temperatures, makes this fixture ideal for accent lighting and indirect general illumination, as well as the full range of wall and ceiling cove applications
- eW Cove MX Powercore meets or exceeds the performance of comparable linear fluorescent strip cove lights
- Maximum light output — Delivers white or colored light at up to 632 lumens per foot.
- Dimming capability — Patented DIMand™ technology offers smooth dimming capability with many two- and three-wire ELV dimmers
- UL Listed

### PureStyle IntelliHue Powercore CK-123-000025-XX



- LED Light with intelligent, tunable white and dynamic color light in one high-performance LED Light
- Perfect for a wide range of interior applications from cove to wall-washing to backlighting and more.
- Superior beam quality that delivers bright, smooth light
- Delivers up to 95 CRI, lumen outputs of up to 800 lm, & color temperatures that range from 2000K to 10000K
- Available in 1 foot and 4 foot lengths and comes available in a range of beam angles (medium, narrow and wide)
- Input voltage: 100 to 277 VAC, auto-ranging, 50/60 Hz
- UL Listed

# COLOR KINETICS

## Controllers & Power Supplies

High Quality LED Products

ColorDial Pro  
CK-103-000025



- Ethernet-based, stand alone lighting controller and interface for Color Kinetics® LED lighting fixtures
- Enhanced LCD Screen for configuring effects and simple dial-and-button controls
- Ideal for applications that desire a variety of effects/programs in an easy to wire interface
- Six onboard effects and eight configurable scenes
- Easy to install and wall mountable
- Measure 1.5" deep, 3" wide and 4.19" high
- ColorDial Pro controls up to 170 unique light addresses

iPlayer 3 Controller  
CK-103-000019



- Compact yet powerful show storage and playback device capable of delivering light shows to installations with up to 340 unique light addresses.
- Flexibility to create and manage light shows using fully customizable effects, multi-track editing, timeline layering, and transition styles.
- Controller Keypad is a wall-mounted user interface providing instant pushbutton playback of up to eight light shows.
- AuxBox automatically triggers up to eight iPlayer 3 light shows using any remote triggering device with a dry-contact closure.
- Set alarms to automatically trigger show playback based on a specific date
- UL Listed

Data Enabler Pro  
CK-106-000004-00



- Data Enabler Pro Integrated data and power for intelligent LED lighting luminaires employing Powercore technology
- Delivers integrated data and power to intelligent color and tunable white LED lighting luminaires employing Powercore technology from Color Kinetics.

DM-1000 0-10V,  
ELV Dimming Module  
CK-109-000036-00



- 0-10V dimmer for ELV-dimmable EssentialWhite and EssentialColor lighting fixtures.
- Smooth, flicker-free dimming
- Sleek aluminium housing
- Easy to install and simple to configure
- DM-1000 features a button for testing LED luminaires that are attached to the dimming module
- Dimensions: 4" H X 7.4" W x 2.49" D
- UL Listed



## VELCRO® Brand fasteners


DS&L is a Platinum Distributor for VELCRO® brand products (Cutting & Mating Services Available. Call for Details)

VELCRO® Brand Hook and Loop Tape



- Pressure sensitive hook & loop tape
- Available in 25 yard rolls
- Pressure sensitive tape is available in nine widths from 1/2" to 4"
- Stocked in black or white (other colors available upon request)
- High quality adhesives are used to stand up to the extreme temperature swings that displays are exposed to
- VELCRO® Brand products assure you of quality
- Superior shear strength too

VELCRO® Brand Hook 88 or Loop 1000 Woven Nylon Tape

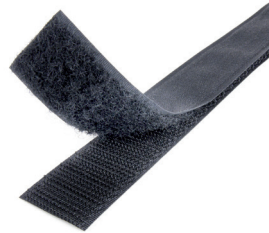

- Standard backing, sew on quality tape
- Available in 25 yard rolls
- Standard backing tape (sewing) quality available in six widths ranging from 5/8" to 4"
- Stocked in black or white (other colors available upon request)
- VELCRO® Brand products assure you of quality
- Superior shear strength too

VELCRO® Brand VELCOIN® Fasteners



- VELCRO® Brand VELCOIN® Hook & Loop dots are available with pressure sensitive adhesive backing
- Stocked in black or white (other colors available upon request)
- Available in six diameters – 1/2", 5/8", 3/4", 7/8", 1-3/8" or 1-7/8"
- VELCRO® Brand products assure you of quality
- High quality adhesives are used to stand up to the extreme temperature swings that displays are exposed to
- Superior shear strength too

VELCRO® Brand LogiStrap®



LOGISTRAP5M - 2"W x 16.4'L  
LOGISTRAP7M - 2"W x 23'L  
LOGISTRAPHD5M - Heavy Duty, 2"W x 16.4'L  
LOGISTRAPHD7M - Heavy Duty, 2"W x 23'L  
LOGISTRAPWNR - LOGISTRAP® winder

- LogiStrap® is a reusable and versatile strap for material handling applications in distribution centers, warehouses, and closed loop logistics to secure pallet boxes, sleeve packs, materials and collapsible containers.
- Secures and releases easily and quickly; no tools or equipment needed.
- Vastly reduces waste when replacing single use alternatives such as shrink wrap, metal banding, and plastic ties.





## VELCRO® Brand fasteners

DS&L is a Platinum Distributor for VELCRO® brand products (Cutting & Mating Services Available. Call for Details)




### VELCRO® Brand Cable Management Sleeves

- Bulk Packed – 50 sleeves per box
- 12" long x 5.75" wide
- Adhesive strip along one 12" side and hook material on the other 12" side
- Run cables along material
- Fold loop side up and attach to hook to create sleeve and securely hold cables in place
- Sleeves can be mounted vertically or horizontally



### VELCRO® Brand Hook MVA#8 Woven Nylon - 1" Plastic Extruded Hook Tape

- 25 Yard Roll - MVA # 8 Pressure Sensitive Tape
- Molded hook shapes are engineered for superior performance with VELCRO® Brand woven and knit loops.
- Most VELCRO® Brand HTH products are available wide and can also be converted into die-cut shapes and cut or scored pieces.
- Variety of backings available including sewable scrims and pressure sensitive adhesives.



### VELCRO® Brand VELTEX® Laminated Loop Knit Nylon, Polyester/ Polyurethane Foam, Nylon Tricot

- VELCRO® brand compatible fabric, comes in a wide range of vivid colors.
- Foam & scrim backing allows for mounting to a variety of rigid materials.
- VELCRO® Brand VELTEX® Laminated Loop Nylon Knit accepts VELCRO® Brand hook tape.
- Available in: black, white, eggshell, beige, spanish red, purple, royal blue, navy, antique gray, platinum, jungle green and chrome green.
- Roll goods are approximately 40 yards long by 60" wide and are sold "mill run".
- Available as cut goods. 3 yard minimum per color or roll goods.



### VELCRO® Brand ONE-WRAP® Tape HTH 888 Knit Nylon/Polyethylene




- Available in rolls for bigger projects, VELCRO® Brand ONE-WRAP® tape is perfect for organizing wires, cords, and cables and for bundling a wide range of materials and tools.
- Customize the length of your tie by cutting the hook and loop roll to size.
- Adjustable ONE-WRAP® tape is strong, reusable, and designed for heavier-duty indoor or outdoor use.
- Available sizes: 3/4" wide x 25 yards, 1" wide x 25 yards, 1-1/2" wide x 25 yards, or 2" wide x 25 yards.



## Supply Products

### Power Management - Cords, Transformers & Drivers

14/3 Flat Extension Cord w/mini ends to fit through 30MM holes in panels



CORD1514/3FLMINIENDS  
CORD2514/3FIMINIENDS  
CORD5014/3FLMINIENDS  
CORD7514/3FLMINIENDS  
CORD10014/3FLMINIENDS

- 14/3 SPT-3 Specialty flat extension cords made with mini male and female ends to fit through 30mm holes in panels used in the trade show industry
- Designed to be used for daily general use or for the specialty application to fit through a 30mm hole
- Rather than female end accepting plugs from the end, this cord is designed for cords to be plugged into the top of the female end Male end will be blue and female ends are clear with an LED indicator light inside. When power is on, LED lights up.
- 14/3 SPT-3 flat black cable, (approved for trade show use)
- Available in 15', 25', 50', 75' and 100' long cords
- Product designed and developed by DS&L



LEDDRIVERCONV10W - LED Driver Converter



- Convert your DS&L MR16 style fixture to work with virtually any LED replacement lamp
- The LED Driver Converter is UL Listed
- See page 9 for additional details

5SPDXSQUIDY - 5 Outlet PowerSquid™



- PowerSquid™ conveniently converts a single outlet to multiple outlets with more flexibility than a standard multi outlet strip
- Converts 1 grounded outlet to 5 grounded outlets
- 5 flexible cords of varying lengths (6" to 10") with grounded receptacle at the end of each 3' power cord with molded female three wire plug

6SPDXWP3 or 6 - Multi Outlet Power Strip - Plastic



- 6 outlets, all plastic body
- On/off rocker switch with built in circuit breaker
- Maximum rating: 15A, 125V AC
- Available black or white
- UL listed
- Please call for complete option details and minimum order quantity



CORDLIBSING - Single Cord Liberator



CORDLIBDOUB - Double Cord Liberator



- CORDLIBSING & CORDLIBDOUB allows transformers to be plugged into liberator while only using a single outlet or multi strip
- Available as a single extension or as a "Y" configuration to convert a single outlet to 2
- Available in black only
- Heavy duty mini extension cord extends outlet from the outlet strip

Mini Power Grommet  
MINIPWRGROMMET-B  
MINIPWRGROMMET-G



- Mini power grommet designed for use in 29mm holes in extruded systems or any solid surface where a power outlet is needed
- Can be mounted in any position desired with heavy duty securing ring.
- Available in black or gray
- ETL listed



## Supply Products

### Power Management - Cords, Transformers & Drivers

#### 12/3 and 14/3 Standard Flat Black Extension Cords



CORD5012/3FLBLP  
- with lit ends



CORD5014/3FLBLP  
- with lit ends

#### Cord Set - 12' 14/3 SJT



- 12' 14/3 SJT cord set
- #8 ring terminal attached to ground wire
- Pre-stripped hot & neutral wires
- Rugged, three wire molded plug

#### CORDTRITAPB



- 8' black 16/3 cord
- Molded end with 3 standard 3 wire receptacles
- Can be used as an extension cord or to bring multiple outlets to a remote location

### Contact Us For Battery Power Options - Sized For Your Project Needs








## Supply Products

### Snap-Trac - STB (black), STW (white), STG (gray)

- Snap-Trac is a 3 piece plastic product that comes in 94" lengths
- Ideal for securely holding graphics in light boxes, graphic walls, partitions or conference room windows.
- Snap-Trac is easily cut and disassembles by prying a corner with a screwdriver and pulling the edge material away. Cuts clean for nice finished look.
- Reduce labor costs and save your customers time when they're changing transparencies
- Available in white, black or gray

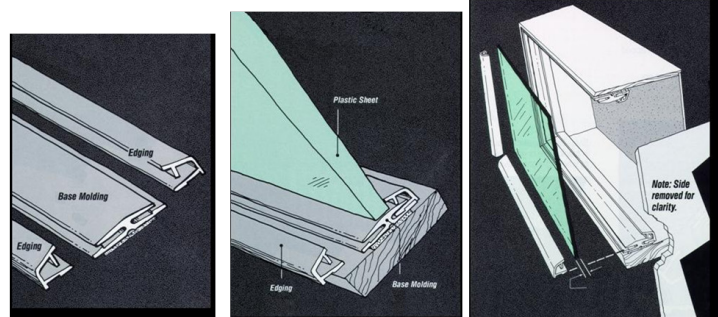

#### The Snap-Trac retainer system consists of:

- Base molding, a plastic strip with self-adhesive back and 2 pieces of edging, which snap into the base to form the retainer.

#### A Snap-Trac light box assembly works like this:

- Self-adhesive base molding is applied to the frame of the structure (up to 1/4" thick ), then the edging is snapped into place.
- To disassemble a Snap-Trac structure, simply pry a corner loose with a screwdriver, pull back the edging and remove or replace the transparency. It's as easy as that!
- With Snap-Trac, there is no need to disassemble the light box for any servicing, including the changing of transparencies!

### Felt Crate Liner



- Crate Liner is white felt used to protect displays and objects while in transit
- Available with a pressure sensitive adhesive (PSA) backing
- Available in a 1/8" thickness (100' Roll) and 1/4" thickness (50' Roll)
- Available in a variety of sizes

FELT1/4X10PS	PSA, 1/4" thick 1" W, 50 ft Roll
FELT1/4X15PS	PSA, 1/4" thick 1-1/2" W, 50 ft Roll
FELT1/4X25PS	PSA, 1/4" thick 2-1/2" W, 50 ft Roll
FELT1/4X30PS	PSA, 1/4" thick 3" W, 50 ft Roll
FELT1/8X10PS	PSA, 1/8" thick 1" W, 100 ft Roll
FELT1/8X15PS	PSA, 1/8" thick 1-1/2" W, 100 ft Roll
FELT1/8X30PS	PSA, 1/8" thick 3" W, 100 ft Roll

### Roto Locks



ROTOLATCHF -  
Roto Lock Receptacle

- Shallow tab receptacle for use with ROTOLATCHM



ROTOLATCHM -  
Roto Lock Latch Shallow Tab

- Shallow tab latch for use with ROTOLATCHF



ROTOLOCKTOOL - Hex Actuation tool

- Hex actuation tool for use with all Roto Locks
- Sold separately from latches and receptacles



## Application Engineering Services

Lighting Layout & Design, Programming & Installation Oversight Services

DS&L has offered lighting layout and product selection assistance for many years.

DS&L, through its application engineering services has provided richer and more technical design services; complete programming services and on site installation oversight on a wide variety of projects.

Advantages for using DS&L's Application Engineering Services:

- Assists in product recommendation and selection, and coordinates all aspects of a timely delivery of product.
- Provides sample fixtures and participates in mock ups to assure a clear understanding by our customer and their client of what will be delivered on the project.
- Handles the programming of fixtures and controllers to perform as the project was presented to your client.
- When retaining DS&L, you retain the services of lighting professionals to oversee the installation and programming of project by those who are most familiar with the products and project.
- If needed, DS&L can provide CAD files necessary to compliment a project (additional charges may apply)
- Manages the work of electricians on site (if applicable) to assure a smooth, efficient and cost effective installation process.
- DS&L is on site to work with you and your customer on any last minute changes to assure that everyone is getting what was expected on the project.
- Handles all matters relating to the turn on of the equipment to assure a smooth operating process for the project.
- Can work with other vendors to integrate its lighting systems with any 3rd party control systems in use on the project.
- Application Engineers meet or exceed the expectation of their customers and insure the satisfaction of the client.





## Replacement Lamps

Most Popular Lamp Styles  
Many Others Available

Need a lamp that you don't see? Give us a call. We have access to most major brands and off brand lamp manufacturer's products.  
(800) 468-1488

B60WPAR16NF  
B75WPAR16NF



75 or 60 Watt PAR 16  
Halogen Narrow Flood

B39WPAR20FL



39 Watt PAR 20  
Halogen Flood

B\_\_WPAR30NFL  
or B\_\_WPAR30WFL



39 Watt or 60 Watt  
PAR 30 Halogen  
• Narrow Flood or  
Wide Flood

B\_\_WPAR38NFL  
or WFL



PAR38 Halogen  
• Narrow Flood or  
Wide Flood  
• Call for Available  
wattage

BO50M16CG35 or 60  
BG71M16CCG40



50 Watt MR 16  
Halogen  
• 35 or 60 Degree  
Spread

K50W120V50D



50 Watt GZ Style  
Lamp - GU10 Base  
• Flood Beam  
Pattern

K75W120V50D



75W/120V Flood  
Lamp - MR16  
• GU10 base

B50LV12V



50 Watt 12 volt  
Bi-Pin Lamp



B200WQHS120 - Halogen  
200 Watt, 120V 79mm



B200WQH120G - Halogen  
200 Watt / 118mm

## LED Replacement Lamps

Energy Efficient & Versatile  
Durable & Longer Lasting  
UL & cULus Listed

Various Color Temperatures & Beam Angles Available. Call For Pricing



PAR20 LED Lamp



PAR30 LED Lamp



PAR38 LED Lamp



MR16 Lamp



MR16 Lamp GU10



A19 Lamp, Dimmable



A19 Lamp, Non-dimmable



BR20 Reflector LED Lamp



BR30 Reflector LED Lamp



BR40 Reflector LED Lamp



## Our Commitment To You

**DS&L is committed to collaborate as a part of your team to deliver:**

- ✦ An Exemplary Customer Experience
- ✦ Innovative Product Solutions
- ✦ Quick and Accurate Responses and Quotations
- ✦ Lighting Design and Value Added Services
- ✦ Alternative Product Suggestions
- ✦ Advice Based on Leading Industry Knowledge
- ✦ Safe Products Designed for Their Intended Use
- ✦ Lowest Total Cost of Use
- ✦ Rental Options When Available
- ✦ Advocate for Special Pricing

