Freedom 360° Series

Twist Pressurized Model With Mix Transfer System

Model 88T-RMT

The "twin serve," the 88T-RMT has a three spigot head, dispensing two flavors top to bottom in a "twist," a side-by-side split, or either flavor separately. The "twin serve" head design allows two operators to dispense product from this unit simultaneously.

Special Features

Mix Transfer System

Exclusively from Electro Freeze, the revolutionary mix transfer system...it's so simple it takes only minutes to clean. Reap all the benefits of a pressurized system with the cleaning time of a gravity fed freezer.

Refrigerated Mix Cabinet

Located in the lower portion of the freezer, the refrigerated mix cabinet provides easy access for filling mix reservoirs. Simply place the mix carton into the cabinet or fill the mix containers, insert the mix tube from each mix transfer system and that's it --- you're ready to make product.

Night Switches

The night switches enable you to close shop at the end of a business day and leave all mix in the freezer (cabinet and cylinders) under refrigeration, so you're ready for operation the next day.

Cleaning and Sanitizing

Thanks to the 24-hour refrigeration, cleaning times and sanitizing procedures are minimized.

Dispensing Head

Using the finest insulating material, prevents frost and drips. Easy pull down handle with adjustable dispensing speed.

Beater Blades

Plastic, durable and long wearing.

Mix Level Indicator

The mix level indicator features a flashing light to alert the operator when mix is needed.


Experience Tells

Electro Freeze has nearly 60 years of experience manufacturing pressurized soft ice cream machines. This is evident in the superior engineering, sturdy construction, quality craftsmanship and dependable performance of every Electro Freeze.



ELECTRO FREEZE®

Plumbing & Electrical Connections

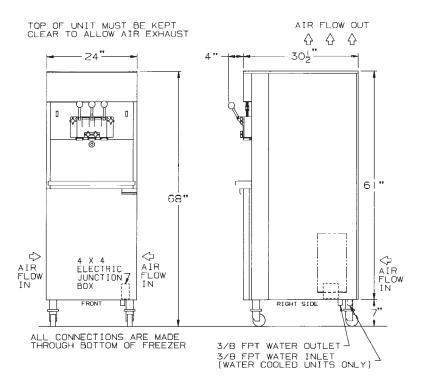

Model 88T-RMT

SPECIFICATIONS											
All specifications subject to change without notice. Check nameplate for exact electrical data.											
MODEL	MOTOR H.P.		DIMENSIONS			NET	TOTAL AMPS				
NO.	Beater	Compressor	D.	W.	H.	WT.	1 Phase Water	1 Phase Air	3 Phase Water	3 Phase Air	
88T-RMT	TWO	12,000 BTU	30.5	24	68	680 LB	34.5	36.2	25.6	27.8	
	2 HP	2.0 HP	77.5 CM	61 CM	173 CM	308 KG					
						MAX FUSE SIZE/HACR CIRCUIT BREAKER					
							40.0 A.	40.0 A.	35.0 A.	35.0 A.	

Refrigerant: 404a

Air or water cooled self contained.

Standard wiring–230 volts A.C., 60 HZ, Single Phase–2 wire 208/230 volts A.C., 60 HZ, Three Phase–3 wire

Electrical characteristics other than above available on request from Sales Office.

MIX CABINET DIMENSIONS								
Model	D.	W.	H.					
88T-RMT	15.5" 39.4 cm	20.6" 51.0 cm	26,69" 67.8 cm					

Authorized Distributor



Certified and/or listed by:





