



T30 LSP



T50 LSP



T80 LSP

## SOLID-DOOR LOW TEMPERATURE REACH-IN FREEZERS

Solid door vertical low temperature freezers manufactured by Global Refrigeration are unsurpassed in performance, reliability, durability and offer the best return on investment in the industry.

The cabinets are available in one door (T30LSP), two door (T50LSP) and three door (T80LSP) models. The patented Kelvinator design and Global innovations offer interior cabinet temperatures ranging from 0°F to -20°F.



All products are certified for energy , safety and sanitation. NSF/ ANSI 7 Standards

### FEATURES

- 20 gauge steel interior and exterior foamed in place with white powder coat paint
- Patented Kelvinator technology guarantees consistent temperature
- Solid high density foamed in place solid doors with heated perimeter and mullion(s)
- Digital temperature controller with programmable defrost options & LED display
- Auto door switch turns off fans when doors open eliminating frost & icing issues
- Expansion valve provides quick pull down & reduces compressor run time
- Top mount compressor
- Fin coil and forced air evaporator improve air flow and performance
- Heated drain pan dissipates condensation, no plumbing required

### ACCESSORIES

- Casters Kit
- Shelf Kits
- Black Color Option
- Stainless Steel Exterior Option

# SOLID-DOOR REACH-IN FREEZERS

## TECHNICAL DATA


MODEL	T30LSP	T50LSP	T80LSP
<b>Temp Range</b>	0°F to -20°F	0°F to -20°F	0°F to -20°F
<b>Exterior Dimensions</b>			
Length	31"	52"	78"
Depth	36.88"	36.88"	36.88"
Height	83.75"	83.75"	83.75"
<b>Interior Dimensions</b>			
Length	26 <sup>1</sup> / <sub>4</sub> "	47 <sup>1</sup> / <sub>4</sub> "	73 <sup>1</sup> / <sub>4</sub> "
Depth	29 <sup>5</sup> / <sub>8</sub> "	29 <sup>5</sup> / <sub>8</sub> "	29 <sup>5</sup> / <sub>8</sub> "
Height	60 <sup>5</sup> / <sub>8</sub> "	60 <sup>5</sup> / <sub>8</sub> "	60 <sup>5</sup> / <sub>8</sub> "
<b>Number of Doors</b>	1	2	3
<b>Door Construction</b>	Foam-in-place urethane	Foam-in-place urethane	Foam-in-place urethane
<b>Hinge Type</b>	Spring-loaded, cam	Spring-loaded, cam	Spring-loaded, cam
<b>Number of Shelves</b>	4+1 bottom rack	8+1 bottom rack	12+1 bottom rack
<b>Shelf Type</b>	Cantilever, Epoxy Coated Steel Wire	Cantilever, Epoxy Coated Steel Wire	Cantilever, Epoxy Coated Steel Wire
<b>Insulation</b>	Foam-in-place urethane	Foam-in-place urethane	Foam-in-place urethane
<b>Wall Thickness</b>	2 <sup>3</sup> / <sub>8</sub> "	2 <sup>3</sup> / <sub>8</sub> "	2 <sup>3</sup> / <sub>8</sub> "
<b>Capacity (cu. ft.)</b>	27.3	49.1	76.2
<b>Capacity (1/2-gal. pkg.)</b>	161	324	486
<b>Shipping Weight</b>	526 lbs.	755 lbs.	900 lbs.
<b>Amp Draw</b>	13.5	8.5	9.0
<b>Electrical</b>	115/60/1	115/60/1	208-230/115V
<b>Interior Finish</b>	High-quality Powder-coat Finish on Galvanized Steel		
<b>Electrical Information</b>	NEMA 5-15P	NEMA 5-15P	NEMA 20P

## SPECIFICATIONS


### T30LSP, T50LSP, T80LSP

Solid Door Reach-In freezer, Global model T\_\_\_LSP. The unit shall consist of white powder coat finished galvanized steel interior & exterior, foamed in place. The unit will be supplied with 4 cantilever shelves and a bottom shelf per door opening.


Cabinet as specified to use R-404A refrigerant. Refrigeration control shall be thermostatic control with a temperature range of 0°F to -20°F.

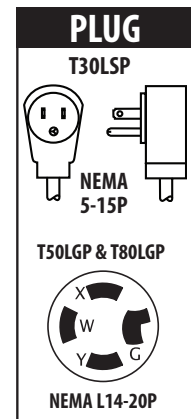


T30LSP, T50LSP, T80LSP  
SIDE VIEW

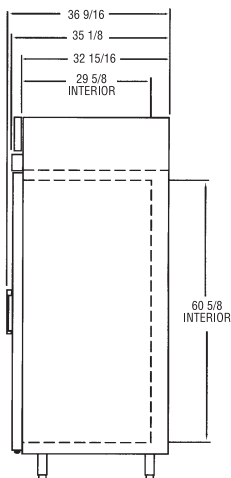


T30LSP  
FRONT VIEW

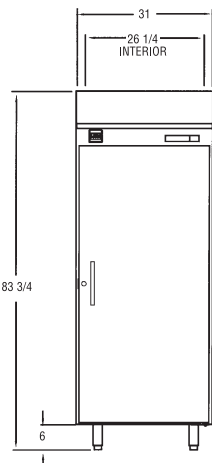

T50LSP  
FRONT VIEW

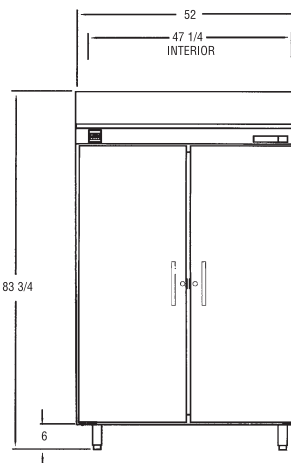

T80LSP  
FRONT VIEW

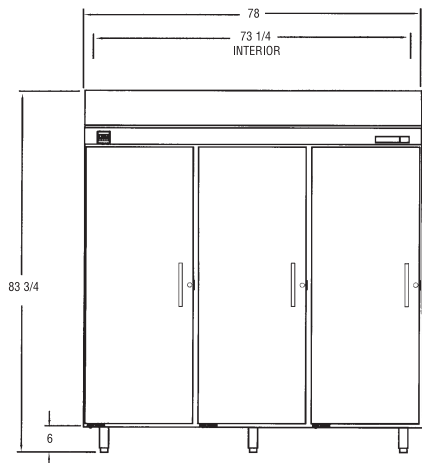

Cabinet designed for optimum performance in air-conditioned area at 70°F to 75°F ambient temperature and 50% to 55% relative humidity.

**Global Refrigeration, Inc.**

Global Refrigeration, Inc., reserves the right to change specifications, terms, and prices without notice.

5855 Grant Avenue, Cleveland, OH 44105

888.650.9799

www.globalref.com