



ICE CREAM HARDENING CABINETS

Quality, performance and reliability and the design of the Global hardening cabinets have set the industry standard for use in hardening batch ice cream products and cakes

The hardening cabinets are available in a single door, double door and quad door designs. Three of the cabinets temperature range is 0°F to -30°F and the other cabinet is 0°F to -40°F.



All products are certified for energy , safety and sanitation. NSF/ ANSI 7 Standards

FEATURES

- Single , Double & Quad Door Models
- 20 gauge steel interior/exterior with white powder coat paint
- Patented Kelvinator refrigeration design
- Solid foamed insulated doors with heated perimeters and mullions
- Digital temperature controller with defrost options and LED display
- Temperature Range 0°F to -30°F; 0°F to -40°F
- Auto switch turns off fans when door opened eliminating frost/icing issues
- Fan(s) & extended evaporator coil eliminate icing on interior walls
- Expansion valve provides quick pull down and decrease compressor run time
- Fin coil and forced air evaporator coil improve performance of unit
- Highest capacity evaporator coil improves performance of unit
- (4) adjustable cantilever shelves & (1) bottom shelf per door
- Heated drain pan dissipates condensation, no plumbing required
- Energy Star

ACCESSORIES

- Caster Kit
- Shelf Kits
- Cantilever Shelf
- Bottom Shelf
- Stainless Steel Exterior

ICE CREAM HARDENING CABINETS

TECHNICAL DATA

MODEL	T30HSP	T50HSP	T50HSQL	T50HSQHP
Temp Range	0°F to -30°F	0°F to -30°F	0°F to -30°F	0°F to -40°F
Exterior Dimensions				
Length	31"	52"	52"	52"
Depth	36 9/16"	36 1/8"	36 1/8"	36 1/8"
Height	83 3/4"	88 3/4"	83 3/4"	83 3/4"
Electrical	115/60/1	220	220	220
Rated Amps	12.0	8.5	8.5	9.0
Cubic Feet	27.3	49.1	49.1	49.1
Shipping Weight	615 lbs	854 lbs	854 lbs	898 lbs

SPECIFICATIONS






T30HSP, T50HSP, T50HSQL, T50HSQHP

Item: _____

The unit construction shall consist of a white powder-coat finished galvanized steel interior and exterior. The unit will be shipped with four cantilever shelves and a bottom rack per full door opening.

Cabinet is specified to use R-404a refrigerant. Refrigeration control shall be mechanical control with a temperature range of 0°F to -30°F or 0°F to -40°F depending upon model.

Cabinet to have standard one-year parts and labor with an extended four-year compressor part only warranty. Cabinet to be UL, C-UL, and NSF Certified.

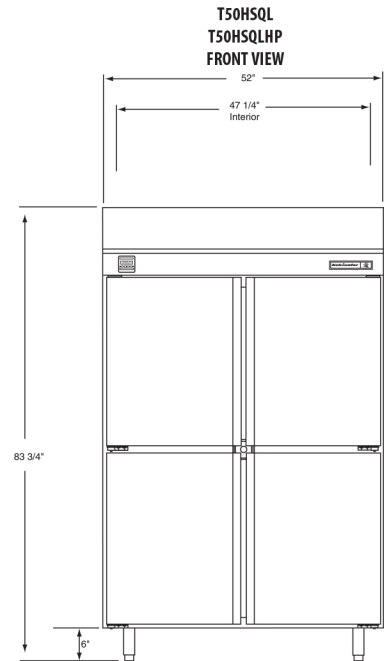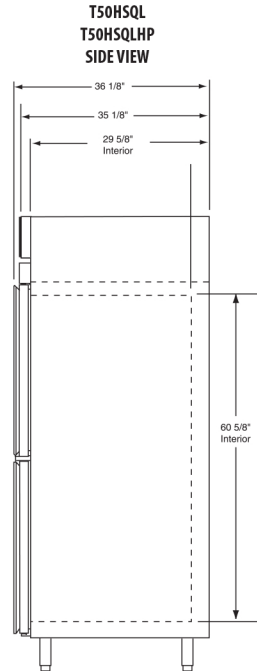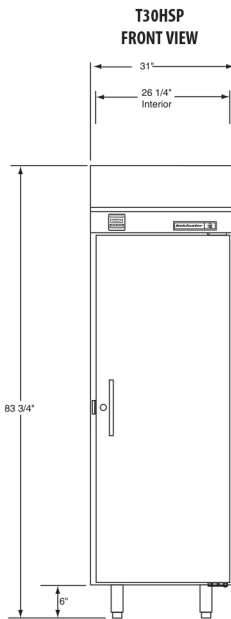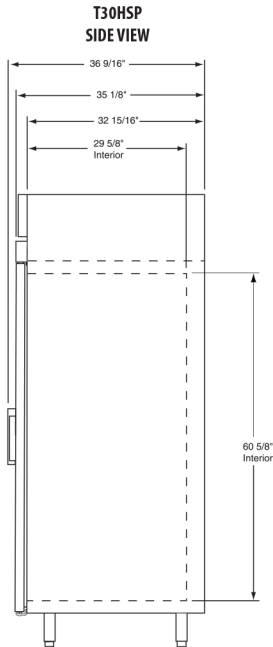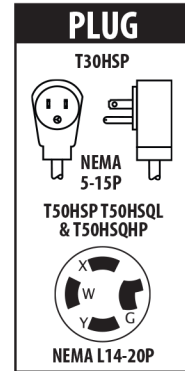

Cabinet designed for optimum performance in air-conditioned area at 70°F to 75°F ambient temperature and 50% to 55% relative humidity.