



# UF 820 E

Tronic

High Capacity  
Duel Flavor Twist Soft  
Serve Pump Model



**Performance** The Carpigiani UF-820 E is designed to meet the highest production demands, outperforming similar models. Carpigiani technology makes this soft serve freezer simple and efficient to operate, giving it great flexibility. Designed to prevent many operational errors, the built-in memory provides pinpoint diagnosis. Hard-O-Tronic consistency control technology, an Exclusive patented system regulates refrigeration by measuring product viscosity to maintain consistent quality control. Patented mix injection system produces unmatched product quality.



**Convenience** Product is fed from rear of cylinder eliminating need to prime and allowing a more controllable overrun, of up to 80%. Separate touchpad controls for each cylinder let you make a combination of twists of differing products. Each cylinder can be run independently. Built-in memory stores information to facilitate repairs.




**Savings** Standby mode conserves energy reducing operation costs during idle periods. Self-monitoring system minimizes costly errors.



**Safety** Standby mode maintains food safe product temperatures in the freezing cylinder. Audible Signal alerts when refill is needed.



# UF 820 E Tronic

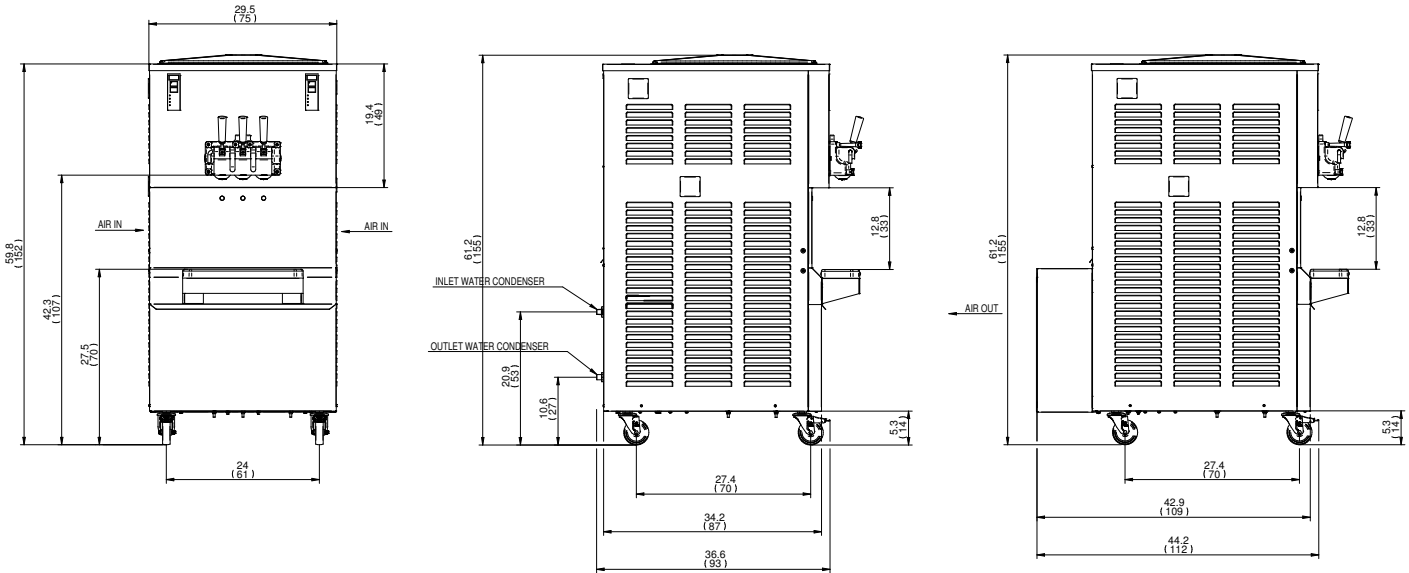

## WATER AIR

Weights	WATER		AIR	
	lbs.	kgs.	lbs.	kgs.
Net	914	415	1005	456
Crated	1058	480	1124	510
Volume	cu. ft.	cu. m.	cu. ft.	cu. m.
	69.57	1.97	89	2.52
Dimensions	in.	cm.	in.	cm.
	Width	29.5	75	29.5
Depth	41.3	105	48.9	124
Height	61.2	155	61.2	155
Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)	
	220/60/1 W / A	35-40A	27-30A	1P, 1W
220/60/3 W	30A	21A	3P, 3W	
220/60/3 A	20-35A	16-26A		

## Specifications

### Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See the Electrical chart for the proper electrical requirements. Consult your local Carpigiani distributor for cord & receptacle specifications as local codes allow.

### Beater Motor

2 HP + 2 HP

### Refrigeration System

R404A

### Water Cooled

Water inlets and drain connections in the rear 1/2" MPT

### Air Cooled \*

Minimum clearance: 6" (15 cm) on both side panels and 20" (51 cm) from the rear panel for proper air circulation.

### Cylinder Capacity

31.8 + 31.8 quarts (30 + 30 liters)

All specifications mentioned must be considered approximate; Carpigiani reserves the right to modify, without notice, all parts deemed necessary. This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals, please consult the local Carpigiani Distributor. Check name plate for exact electrical data. \* Room temperature 68°F (20°C).

## Bidding Specs

Electrical Volt \_\_\_\_\_ Hz \_\_\_\_\_ Ph \_\_\_\_\_ Neutral  Yes  No Cooling  Air  Water

Options \_\_\_\_\_



738 Gallimore Dairy Road, Suite 113  
High Point, NC - 27265  
Toll free (800) 648 4389

Dealer



[carpigiani.com/us](http://carpigiani.com/us)

an Ali Group Company



The Spirit of Excellence