

DROP-IN SERVING EQUIPMENT



FROST TOP

Refrigerated,
Self-Contained

- WF-2
- WF-3
- WF-4
- WF-5
- WF-6

SPECIFICATIONS

TOP: Constructed of 14 gauge, type 304 stainless steel, die stamped with a raised perimeter bead. There shall be a solid vinyl gasket under the beaded edge to form a seal to the counter top, thus preventing seepage or marring of the counter top.

FROST TOP: Constructed of 14 gauge, type 304 stainless steel, one piece construction, all welded, ground and polished to a uniform finish. The top is formed to stand 1" above the counter top and is provided with a 1/2" full perimeter gutter to collect condensation; a 1" I.P.S. drain is provided. The frost top has copper tubing firmly soldered to the exterior bottom.

INSULATION: The pan is fully insulated with high density fiberglass and polystyrene, 1-1/2" thick, and enclosed with an 18 gauge galvanized steel outer case.

REFRIGERATION SYSTEM: The compressor housing shall be fabricated from 14 gauge galvanized steel and bolted to the base of the unit. A fully self-contained condensing unit is provided with a hermetically sealed compressor. The system is fully charged with CFC free refrigerant and ready to operate.

NOTE: Proper ventilation must be provided in counter.

ELECTRICAL: The unit will be wired for 15 amps., 120 volt, single phase operation with an on/off switch and pilot light. A 6' long 3-wire cord and plug (NEMA 5-15P) will be provided.


Specifications subject to change without notice.

STANDARD FEATURES


- "Quick" frost top, stands 1" above counter for attractive display - ideal for pre-plated cold food
- Fully insulated for maximum efficiency and energy savings
- Factory applied gasket - makes installation a snap and seals units to the counter top, thus eliminating seepage
- 1-Year Parts & Labor Warranty
- NSF Certified and UL Recognized

ACCESSORIES


- **5YW** - 5-Year Compressor Warranty
- **WFFT** - Flush recessed top for frost top units
- **RS** - Remote on/off switch for counter mounting
- **RDVE** - Rear Drain Valve Extension
- * **220 Volt - 50 Cycle** Compressor

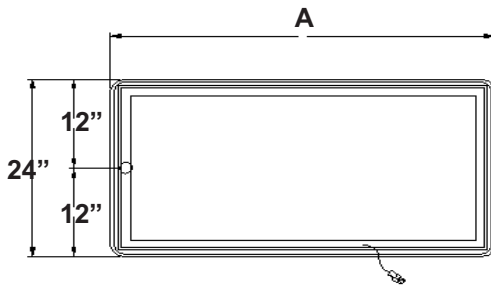

PLAN VIEW

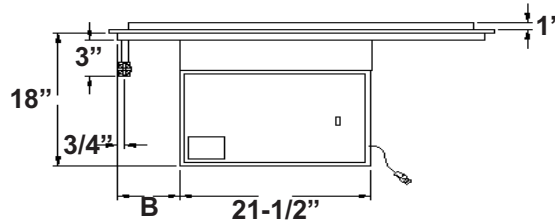

ELEVATION



END VIEW

| MODEL | "A" | "B" | FROST TOP SIZE | ELECTRICAL CHARACTERISTICS | CUT-OUT REQUIRED | SHIP WT. (LBS.) |
|-------|----------------------|----------------|---------------------------------------|-----------------------------|---------------------------------------|------------------|
| WF-2 | 29-3/4" (75.5cm) | 6" (15.2cm) | 19-1/2" X 25-1/4" (49.5 X 64.1cm) | 3.9amps. - 120V - 1/5HP | 22-1/4" X 28" (56.5 X 71.1cm) | 171 (77.6kg) |
| WF-3 | 43-1/2" (110.4cm) | 7" (17.7cm) | 19-1/2" X 39" (49.5 X 99cm) | 6.8amps. - 120V - 1/4HP | 22-1/4" X 41-3/4" (56.5 X 106cm) | 207 (93.9kg) |
| WF-4 | 57-1/4" (145.4cm) | 7" (17.7cm) | 19-1/2" X 52-3/4" (49.5 X 133.9cm) | 9.8amps. - 120V - 1/3HP | 22-1/4" X 55-1/2" (56.5 X 140.9cm) | 236 (107kg) |
| WF-5 | 71" (180.3cm) | 7" (17.7cm) | 19-1/2" X 66-1/2" (49.5 X 168.9cm) | 9.8amps. - 120V - 1/3HP | 22-1/4" X 69-1/4" (56.5 X 175.8cm) | 263 (119.3kg) |
| WF-6 | 84-3/4" (215.2cm) | 7" (17.7cm) | 19-1/2" X 80-1/4" (49.5 X 203.8cm) | 10.7amps. - 120V - 1/2HP | 22-1/4" X 83" (56.5 X 210.8cm) | 328 (148.8kg) |

| REFRIGERATION CHART | | | | | | |
|---------------------|-----|------|-----|-----------|------------|-------------|
| MODEL | HP | REF. | OZ. | LOW PSIG. | HIGH PSIG. | BTU M10 90A |
| WF-2 | 1/5 | 134A | 6 | 8 | 150 | 505 |
| WF-3 | 1/4 | 134A | 8 | 8 | 155 | 1070 |
| WF-4 | 1/3 | 134A | 10 | 8 | 155 | 1285 |
| WF-5 | 1/3 | 134A | 12 | 8 | 155 | 1285 |
| WF-6 | 1/2 | 134A | 16 | 8 | 160 | 2140 |

| MODEL | WT. LESS COMP. (LBS.) |
|-------|-----------------------|
| WFX-2 | 130 (59kg) |
| WFX-3 | 160 (72.6kg) |
| WFX-4 | 190 (86.2kg) |
| WFX-5 | 217 (98.4kg) |
| WFX-6 | 252 (114.3kg) |

WFX - REFRIGERATED FROST TOP WITHOUT COMPRESSOR

Units include Refrigerated Frost Top, Cap Tube & Drier (for hook up in field by others)

COMPRESSORS FOR REMOTE INSTALLATIONS

- 2029** - 1/5 HP for WFX-2
- 2029-1** - 1/4 HP for WFX-3
- 2029-2** - 1/3 HP for WFX-4 & 5
- 2001-4** - 1/2 HP for WFX-6