


SX-450

KU
KC

REV. BY	DATE	DESCRIPTION	REV. BY	DATE	DESCRIPTION	REV. BY	DATE	DESCRIPTION	REV. BY	DATE	DESCRIPTION
									JLS	2013-04-23	CORRECTED Q210 OUTLINE

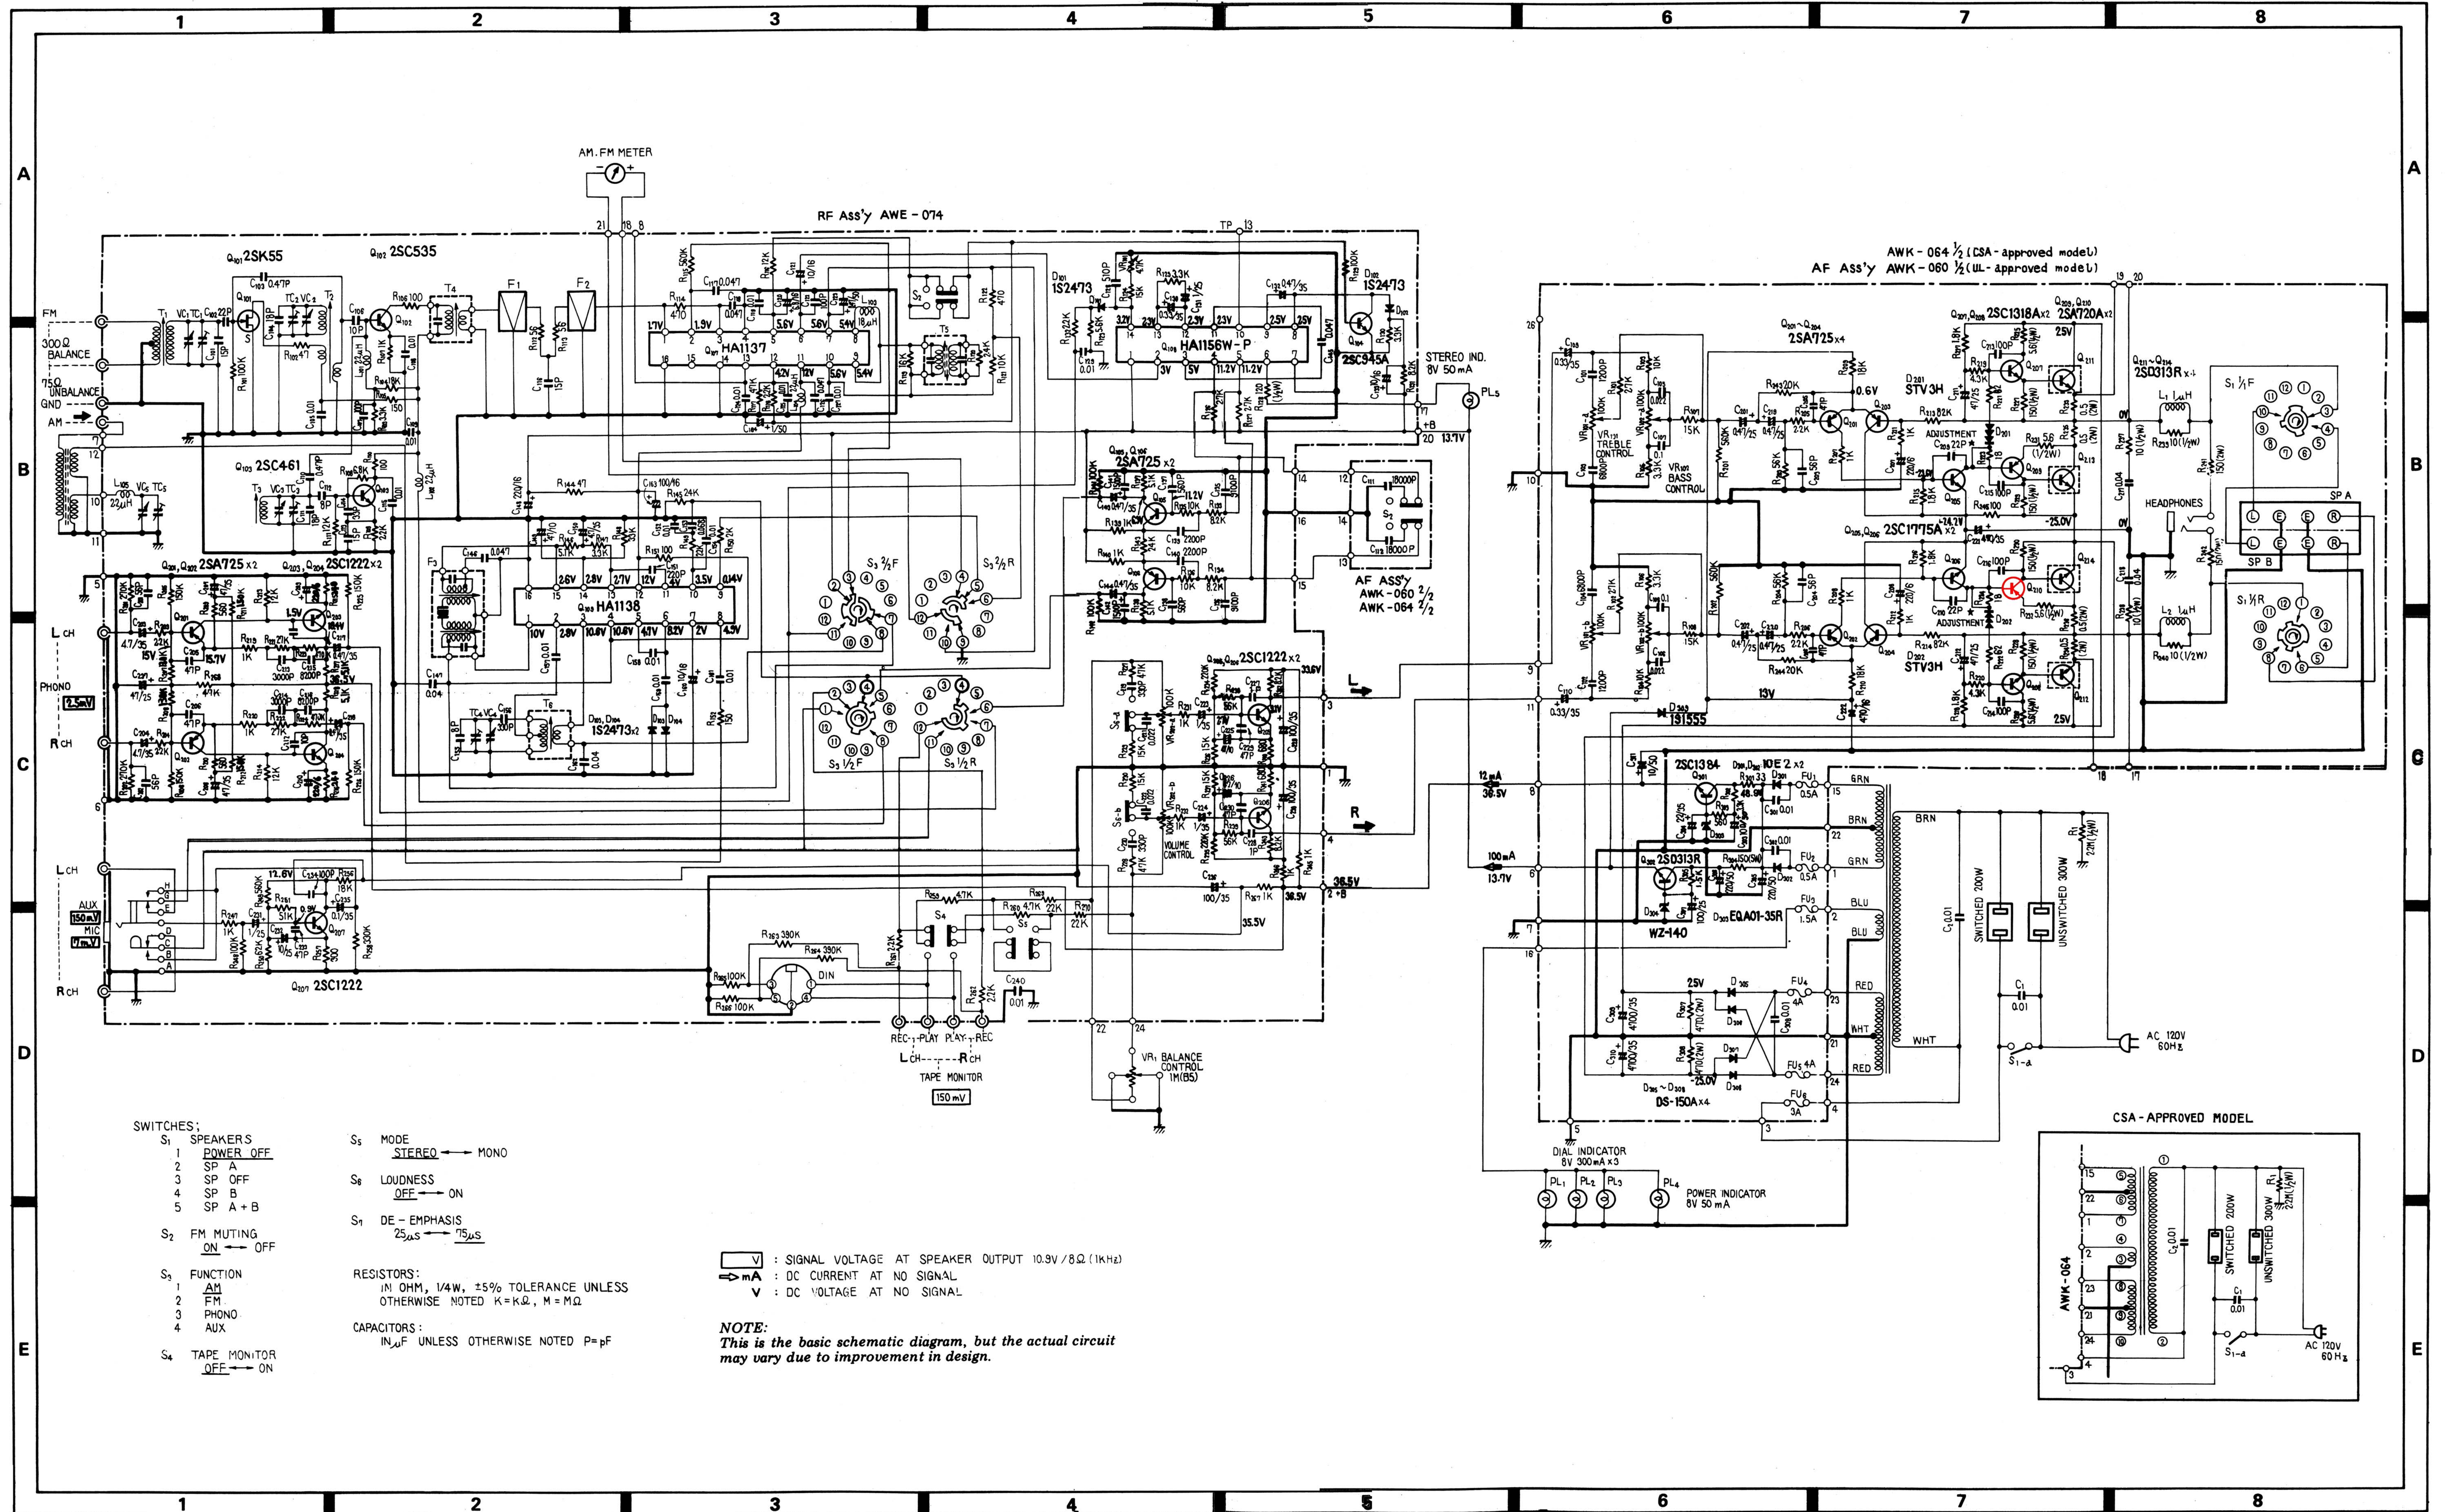

- SWITCHES:**
- S₁ SPEAKERS POWER OFF
 - 1 SP A
 - 2 SP OFF
 - 3 SP B
 - 4 SP A + B
 - S₂ FM MUTING ON → OFF
 - S₃ FUNCTION
 - 1 AM
 - 2 FM
 - 3 PHONO
 - 4 AUX
 - S₄ TAPE MONITOR OFF → ON
 - S₅ MODE STEREO → MONO
 - S₆ LOUDNESS OFF → ON
 - S₇ DE-EMPHASIS 25μs → 75μs

RESISTORS:
 IN OHM, 1/4W, ±5% TOLERANCE UNLESS OTHERWISE NOTED K=KΩ, M=MΩ

CAPACITORS:
 IN μF UNLESS OTHERWISE NOTED P=pF

⊖ : SIGNAL VOLTAGE AT SPEAKER OUTPUT 10.9V/8Ω (1kHz)
 → mA : DC CURRENT AT NO SIGNAL
 ⊖ : DC VOLTAGE AT NO SIGNAL

NOTE:
 This is the basic schematic diagram, but the actual circuit may vary due to improvement in design.

