

C.C.Rider Seat

Installation Instruction

Part Number: FS02-RSP (Rear Small Pad)

WARNING

Rider and passenger safety depend upon the correct installation of this kit. Improper installation of this kit could result in death or serious injury.

INSTALLATION

1. Remove driver seat from the vehicle as per owner's manual.
2. See Figure 1. Remove and retain four fasteners (A) and remove LH (B) and RH (C) side strut covers. Carefully hang strut cover assemblies.

*CAUTION

Once all four fasteners are removed, the fender will be loose and can move freely. Use caution to ensure damage does not occur to fender finish, taillight housings, or wiring.

3. Place a clean towel over the top of the fender to protect from scratches during installation.
4. See Figure 2. Lower seat (1) over top of fender (Do not set seat on fender). Hand starts four new screws (2) and washers (3). Remove towel. Tighten.
5. See Figure 3. Remove rubber blanks (D) from each strut cover.
6. See Figure 4. Ensure rear light wiring is properly secured in strut covers (shown with arrow) and hand starts strut cover and rear fender mounting screws (A). Confirm rear light wiring is positioned to avoid pinching. Tighten.
7. Reinstall the front seat as per the owner's manual.

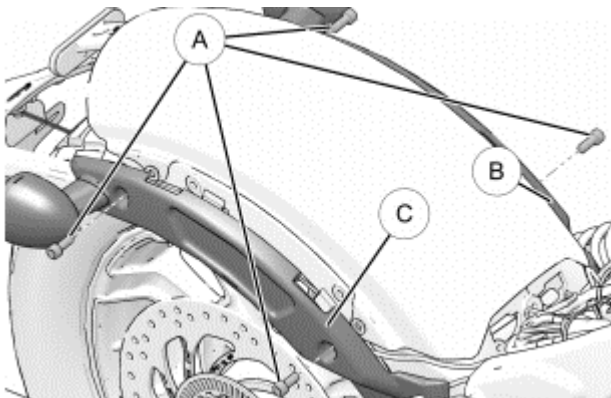


Figure 1.

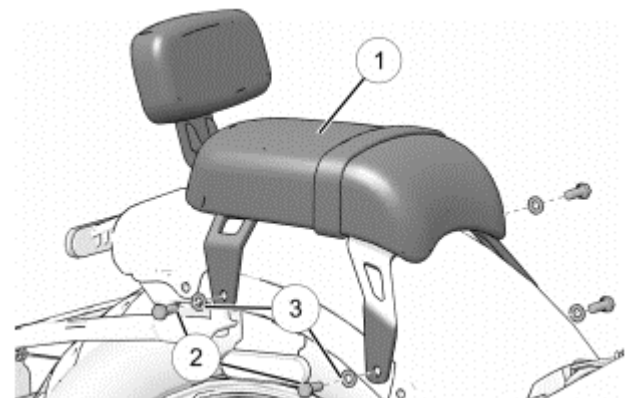


Figure 2.

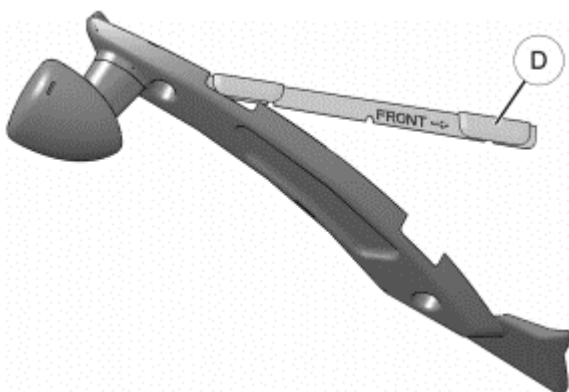


Figure 3.

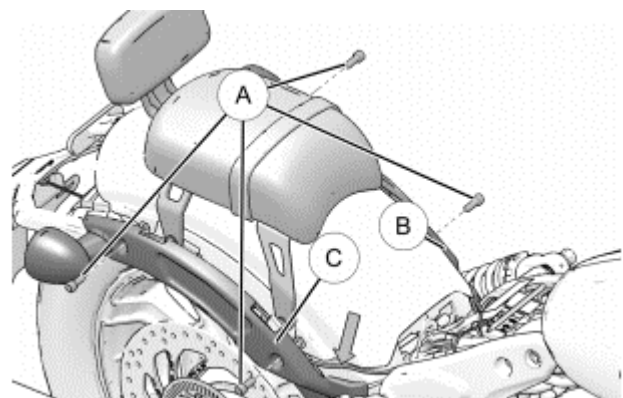


Figure 4.