

Outdoor Wave-to-Open Sensors

SD-9163-KSQ Slimline, English*

SD-9163-KSVQ Slimline, English,* Manual Override, ETL UL294 Listed

SD-9263-KSQ Single-Gang, English*, ETL UL294 Listed

SD-9263-KSVQ Single-Gang, English, * Manual Override, ETL UL294 Listed

The ENFORCER Outdoor Wave-to-Open Sensor is a full-featured exit plate which uses IR technology to allow egress from a protected area or activate a device with the simple wave of a hand. Since no touch is required, this sensor is suitable for use in hospitals, clinics, labs, cleanrooms (to reduce the risk of contamination), schools, factories, or offices.







SD-9163-KSQ

SD-9163-KSVQ

Features

- Weather-resistant (IP65) for outdoor use[†]
- Clean and simple no-touch operation reduces the risk of cross-contamination
- Adjustable sensor range up to 7" (18cm)
- Stainless steel plate, available in slimline or single-gang
- 1.2A relay, adjustable trigger duration 0.5~30 seconds
- Selectable LED colors (turns from red to green or green to red) to show if the sensor is activated

SD-9163-KSVQ and SD-9263-KSVQ only

 Manual override button functions without electricity in case of power failure





Intertek 5024193 Conforms to UL294

SD-9263-KSQ

SD-9263-KSVQ


Specifications

Model		SD-9163-KSQ SD-9163-KSVQ	SD-9263-KSQ SD-9263-KSVQ	
Operating voltage		12~24 VDC		
Current draw Stan	dby (12/24 VDC)	13mA / 15mA	18mA / 23mA	
(max. ±10%) Trigg	gered (12/24 VDC)	23mA / 28mA	28mA / 35mA	
Relay type		Form C dry contact, 1.2A@24VDC		
Response time		10mS		
Output time		0.5~30s, toggle		
Range		2"~7' (5~18cm)		
IP Rating		IP65†		
Operating temperature		-4°~131° F (-20°~55° C)		
Dimensions		1 ¹ / ₂ "x4 ¹ / ₂ "x1 ¹ / ₂ " (39x115x39 mm)		

^{*}Also available with Spanish or French faceplates

†When properly installed.

Sample Installation

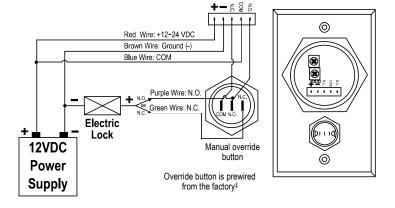

‡SD-9163-KSVQ and SD 9263-KSVQ only

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 **Fax:** (949) 261-7326 **Website:** www.seco-larm.com **Email:** sales@seco-larm.com

Copyright © 2023 SECO-LARM U.S.A, Inc. All rights reserved.

All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

(€ Refis

Ordering Information

Model	SD-9163-KSQ	Open Sensoi SD-9263-KSQ	SD-9163-KS1Q	SD-9263-KS1Q	SD-9163-KS2Q	SD-9263-KS2Q
Language	•	glish		anish		ench
Photo	ENFORCER WAVE TO OPEN (())	WAVE TO OPEN	ENFORCER* ABRIR SIN CONTACTO (((\(\psi\)))	ABRIR SIN CONTACTO	EMPOREER OUVRIR SANS CONTACT ((()))	OUVRIR SANS CONTACT

^{*}Also available with European faceplate in English, Spanish, and French models

Outdoor Wave-to-Open Sensors with Override Button				
Model	SD-9163-KSVQ	SD-9263-KSVQ	SD-9463-KSVQ	
Language	English [†]			
Photo	ENFORCER WAAVE TO OPEN (())	Manual Ovemda	WAVE TO OPEN Manual Marual Override	

[†]Spanish and French faceplates available by special order

Outdoor	Wave-to-Open Sensors	s - Other Models	Other Medele	
Model	SD-9963-KSGQ	SD-9773-KNEVQ	Other ModelsAlso Available	
Туре	Post-Mount	Surface-Mount		
Photo	WAVE TO OPEN Manual Overrida Assessed	WAVE TO OPEN (I)	For our full line of OEM/private label infrared sensors, contact SECO-LARM	

(€ ∰