

How to Remove and Replace the Turret on the Eco Clever



Before starting,

With the front door in the open position disconnect the power to the machine and remove all pad holders.

What you'll need

Small flat screwdriver
Pair of pliers


Instructions

Pull the centre seal from the shaft and then with the small screwdriver remove the clip just behind the seal. This clip stops the seal sliding down the shaft.

Now with the screwdriver you need to remove the turret ring by finding the small slot gap and pushing the screwdriver you can get under the ring and pop it out

Finally you can remove the turret and clean behind there. Clean the sensors with a soft cloth or cotton bud.

It's advisable to remove and clean behind here to keep it clear and running smoothly

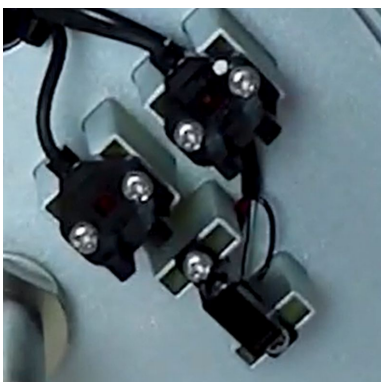

[Watch the Video](#)



[These parts are available through our website here](#)