


Thank you for purchasing the heliguy™ Mavic 2 Flight Cage.  
The following instructions will guide you through how to assemble and disassemble the cage with your Mavic 2 drone.



Step One: Unfold your Mavic 2 series drone and remove any connected propellers. Place the cage on a flat surface.

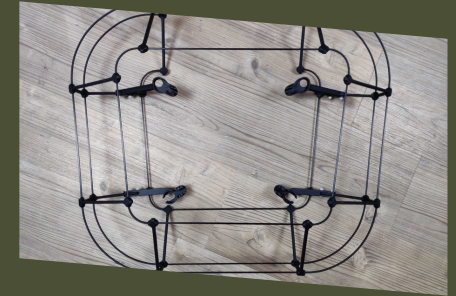

Step Two: Place the drone into the cage through the top aperture.



Step Three: Connect the front legs of the drone by firmly pressing the leg into the connector.



Step Four: Connect the back legs of the drone by firmly pressing the leg into the rear connectors.



The cage is now assembled and ready for use.



## Disassembly



Step One: Remove the rear connectors by pushing the sides of the connectors around the drone's arms with your thumbs.



Step Two: Remove the front connector by firmly pushing the sides of the connectors around the drone's arms with your thumbs. You can now remove the drone from the cage.

For added strength during use, we recommend using the included cable ties, as shown here. Doing this reinforces the connection so the cage stays solidly attached to your drone no matter the collision. For added protection, we supply each cage with our Mavic 2 Repair Refresh cover as standard.\*



## Specifications

Dimensions

605mm x 505mm x 165mm

Weight

230g\*

Maximum impact resistance

3m/s

**Contact us: 0191 296 1024 [info@heliguy.com](mailto:info@heliguy.com)**

\*Disclaimer: Using the Mavic 2 Flight Cage will put the total mass of the drone above the DJI specified MTOW, operate at user discretion. Using this product does not guarantee the drone's survival in a crash scenario. Repair Refresh claims will be subject to flight log data analysis with our in house technical team.

