




garland

Security Cable

Part No: MC74-W

| | |
|-----------------------|--|
| Description | Stranded 24AWG PACW, 4 Cores, PVC Insulation, PVC Sheath. |
| Applicable Standards | AS/CA S-008, BS4737-3.30, AS 1049 |
| Suitable Applications | For inter-connecting wiring, suitable for use in Security/Intruded Alarm system; Use in low voltage/low current applications such as intercommunication. |
| | Not suitable for mains connection. |


Cable Construction Drawing

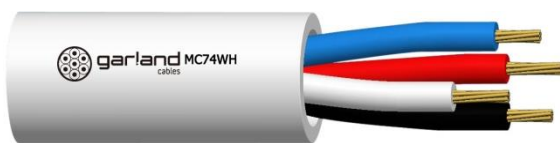

Picture is for illustration only.
For actual jacket colours, please refer to Packing Table.



Cable Construction Relative Parts



| Cable Description | | | |
|-------------------|--------------------|--------------------------|----------|
| Conductor | No. of Strands | Strand Size | Material |
| | 7 | 0.2mm | PACW |
| Insulation | Cores: | 4 | |
| | Material: | V-75 PVC | |
| | Colour: | White, Blue, Red, Black. | |
| | Nominal Diameter: | 1.1 mm | |
| | Nominal Thickness: | 0.3 mm | |

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.garlandcables.com.au

MC74-W-150311.docx

made by



madison



garland

| | | |
|--------|--------------------|------------------------|
| Sheath | Material: | 4V-75 PVC |
| | Colour: | Refer to Packing Table |
| | Diameter: | 3.7 mm |
| | Average Thickness: | 0.4 mm |

Electrical Properties

| | |
|----------------|-----|
| Voltage Rating | ELV |
|----------------|-----|

Mechanical Properties

| | |
|----------------------------------|--------------|
| Operating Temperature Range | -15 to 75°C |
| Max. Recommended Pulling Tension | 61N |
| Min. Bend Radius (install) | 40 mm |
| Approximate Mass | 1.86 kg/100m |

Packing Table

| SKU | Jacket Colour | Length (Metres) | Pack Type | Boxes x Reels per Pallet |
|-------------|---------------|-----------------|--------------|--------------------------|
| MC74WH100W | White | 100 | Plastic Reel | 36 x 8 |
| MC74WH300BW | White | 300 | Pull Box | 45 or 36 |

- Madison reserves the right to make changes to the products described in this specification without prior notice
- All values subject to factory tolerances

With Garland, you are always well connected.

Sales Enquiries **1800 66 99 99**
www.garlandcables.com.au

MC74-W-150311.docx

