


**GENERAL DESCRIPTION**

The McBride SMC60SB sloping surface mount back box is designed for Public Address Systems to provide a sturdy baffle mount, speaker protection and back wave cancellation.

Designed to provide high vandal resistance, the SMC60SB is constructed of heavy gauge steel for extra rigidity and resistance to corrosion. Provisions are made on the mounting brackets to allow the use of HILTI type fasteners or standard anchors. The front of the SMC60SB accepts standard screw mounting for use with all our 12-1/2 inch square flush ceiling baffles.

The McBride SMC60SB is available on its own or as a pre-assembled unit with various combinations of standard square baffles, speakers and transformers.

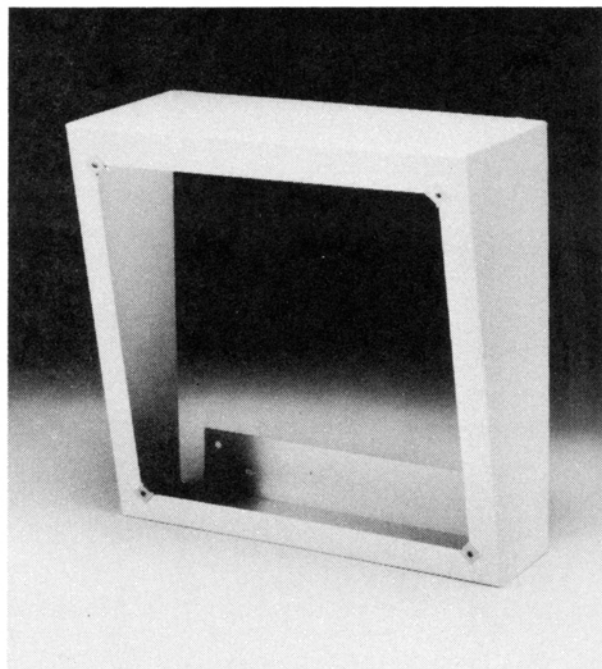

**ARCHITECTURAL SPECIFICATIONS**

**MODEL SMC60SB**

*The Sloping Surface Mount Back Box Shall be a McBride Model SMC60SB.* The back box shall be constructed of heavy gauge steel and shall measure 12-13/16 inches square and 6-1/2 inches deep at the top and 3-1/2 inches deep at the bottom. The baffle mounting holes shall be spaced on 11 inch centres. All standard 12-1/2 inch square McBride flush ceiling baffles shall mount to the SMC60SB with screws to the provided speed nuts. Four provisions will be made on the mounting brackets to allow the use of HILTI type fasteners or standard anchors. The back box shall be finished in satin white with a tough baked enamel.

**McBRIDE TECH SPECS**

Model Number:	SMC60SB (standard only)
Back Box Type:	Flush mounted square sloping back box.
Back Box Mounting:	HILTI type fasteners or standard ancors. 4 places.
Baffle Mounting:	Screw mounted, 4 places (all 12-1/2 inch std. square McBride baffles.
Outside Dimensions:	12-13/16 inches square.
Baffle Mount Centres:	11 inches.
Approximate Slope:	13 degrees.
Depth:	6-1/2 inches at top. 3-1/2 inches at bottom.
Weight:	Approx. 3-1/2 lbs.
Finish:	Satin white baked enamel.
Packaging:	8 to a carton.

**DISTRIBUTED IN CANADA BY:**



**LOUDSPEAKER SOURCE LTD.**

638 COLBY DRIVE, WATERLOO, ONTARIO, CANADA

N2V 1A2

Tel: (519) 884-3500

Fax: (519) 884-0193