

TRACTUS3D

A PROUD DUTCH COMPANY

HEART
SOUL
&
DUTCH
PERFECTION

Inside every 3D Printer



T3000SE

SPECIFICATIONS

LARGE VOLUME SE SERIES

T3000SE

SPECIFICATIONS

TRACTUS3D

Machine properties

Printing technology	Fused filament fabrication (FFF) - Fused deposition modeling (FDM)
Build width	1000 mm diameter (39.4")
Build height	1550 mm (61.0")
Speed	up to 600 mm/s
XYZ resolution	20, 20, 50 micron
Layer resolution	0.4 mm nozzle: 300 - 50 micron 0.6 mm nozzle: 400 - 50 micron 0.8 mm nozzle: 600 - 50 micron 1.0 mm nozzle: 800 - 50 micron 1.2 mm nozzle: 1000 - 50 micron 1.4 mm nozzle: 1200 - 50 micron 1.8 mm nozzle: 1400 - 50 micron
Operating sound	+/- 32dBA
Power rating max.	2750 W
Connectivity	LAN + WIFI
Display	7" tablet and option for an additional 15" color touchscreen (397mm)
Language support	English, Dutch, French, German, and many more
Monitoring	Nozzle camera and Web interface

Physical dimensions

Dimensions	1350 mm x 1600 mm x 3050 mm
Net weight	275 kg
Shipping weight	750 kg
Shipping box dimensions	1800 mm x 1800 mm x 3600 mm

Build plate

Build plate material	Heated glass build plate
Build plate temperature	up to 110 °C (230 °F)
Build plate levelling	Automatic bed levelling with probe unit
Build plate heat up time	< 7 min from 20 to 60 °C (68 - 140 °F)

Print head

Feeder type	Direct Drive Dual Gear (ready for composite materials)
Nozzle diameter	0.4mm, 0.6 mm, 0.8 mm, 1.0 mm, 1.2 mm, 1.4 mm, 1.8mm
Nozzle temperature	up to 500 °C (932 °F)
Nozzle heat up time	< 90 sec
Max. extrusion volume	up to 135 mm ³ /s

Ambient conditions

Operating ambient temperature	15 - 35 °C (59 - 95 °F), 10 - 90% RH non-condensing
-------------------------------	---

Materials

Supported materials	PLA, PR01, PET-G, ABS, ASA, Facilan C8, TPU/TPE, Nylon, PC, Fillers like woodfill
Filament diameter	1.75 mm

Software

Supplied software	Simplify3D with 1 license (usage on 2 computers)
Supported OS	MacOS, Windows and Linux
File types	STL, OBJ, 3MF, JPG, PNG
Printable formats	G, GCODE

Service and support

Warranty period	12 months
Technical support	Support from Tractus3D support team or certified service partners or resellers
SLA (included)	Free cleaning of printheads (excluding shipping costs), discount on filaments, 50% discount on new upgrades.

LARGE VOLUME SE SERIES

T3000SE
Max. printing size


1000mm (39.4")
Diameter

1550mm (61.0")
Height



CONTACT

Please never hesitate to reach out to us.

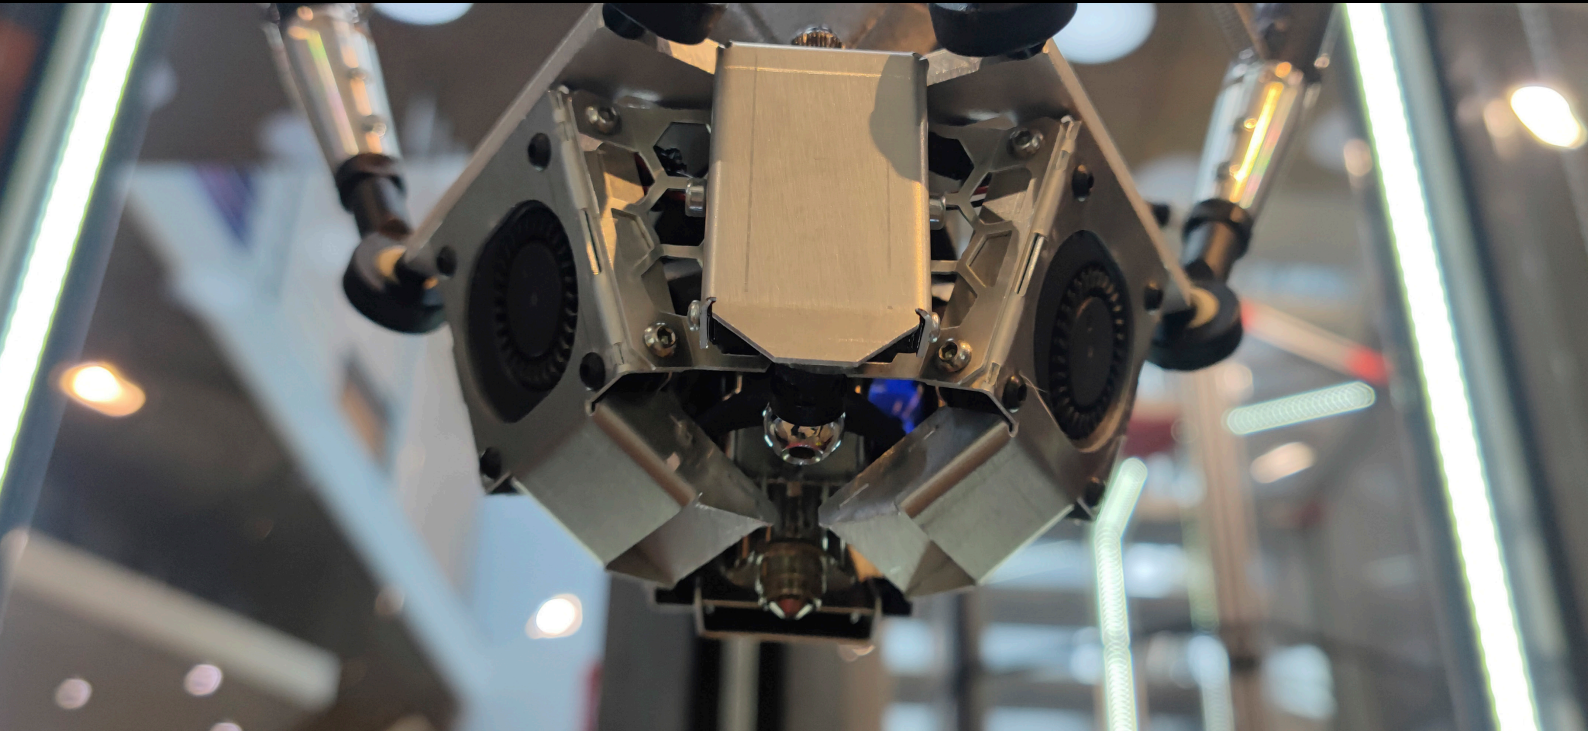

Company name
Year of establishment

Tractus3D
2015

Address

Holweistraat 2
4181 CC Waardenburg
The Netherlands

Phone
Email
Website

+31(0)85 130 72 70
info@tractus3d.com
www.tractus3d.com

TRACTUS3D