


## MULTIPURPOSE™

MultiPurpose™ is a lithium complex based grease formulated with high quality base oils and fortified with a special additive package providing extreme pressure and anti-wear properties. It is a popular choice for the automotive and industrial sectors due to its thermal stability provided by its high dropping point, coupled with the balance of other important performance properties (such as EP, Water Washout, Rust and Corrosion Protection).

MultiPurpose™ provides protection against a variety of temperatures and uses, extending service life in critical parts subjected to moderate pressures and loads. Additionally, this grease will not easily washout in the presence of water. It also exhibits very good pumpability, even at lower temperatures, allowing it to be suitable for centralized lubrication systems.



## PERFORMANCE DASHBOARD

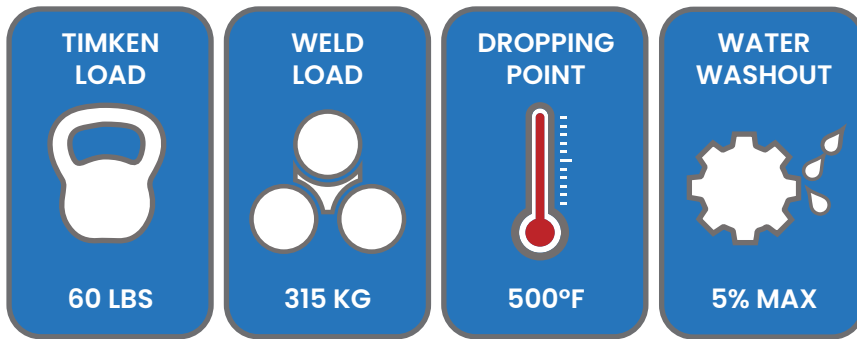

### PRIMARY INDUSTRIES



### HEALTH AND SAFETY

Based on available information, this product is not expected to produce adverse effects on health when used for the intended application and the recommendations provided in the Safety Data Sheet (SDS) are followed. SDS's are available upon request through your sales contract office, or via the Internet. This product should not be used for purposes other than its intended use.

If disposing of used product, take care to protect the environment. As with all cleaning and maintenance procedures, run-off from the cleaning or maintenance process should be diverted into a collection vessel and not allowed to soak into the ground or enter a storm sewer. If this product is spilled or contaminated and cannot be used, creating the need for disposal, wipe up or scrape up product and deposit in a sealable container. Thoroughly clean area with detergent solutions and rinse well with water.

#### ⚠️ WARNING!

Prolonged or repeated skin contact may cause irritation. Use protective wear to avoid eye and skin contact. Wash thoroughly after use. For skin contact, wash with soap and water. If swallowed, seek medical attention immediately. For eye contact, flush with water for 15 minutes and contact a physician. For additional information read the Safety Data Sheet for this product. **KEEP OUT OF REACH OF CHILDREN.**

### TECHNICAL DATA

TEST	METHOD	MULTIPURPOSE™
NLGI	DATA	2
COLOR	DATA	BLUE
THICKENER	DATA	LITHIUM COMPLEX
TEXTURE	DATA	TACKY
VISCOSITY @ 40 cSt	ASTM D-445	220
TIMKEN LOAD	ASTM D-2509	60
WELD LOAD, kg	ASTM D-2596	315
DROPPING POINT	ASTM D-2265	500
BASE OIL TYPE	DATA	MINERAL
WATER WASHOUT 175F %	ASTM D-1264	5% MAX
RUST TEST	ASTM D-1743	PASS
COPPER CORROSION	ASTM D-4048	1b
% of LUBRICATING SOLIDS	DATA	N/A
VISCOSITY INDEX	DATA	90+

### AVAILABLE PACKAGING SIZES

