


## NEVERMELT™

NeverMelt™ is a bentone thickened grease with high quality base oils and a super tacky additive package that is coupled with extreme pressure and rust and corrosion additives. This grease makes an excellent choice anywhere a non-melting or impact resistant/pound out resistant grease is required.

NeverMelt™ is also formulated with heavy duty ISO 460 viscosity base oil, to increase its load carrying performance. This grease is a popular choice for multi-purpose applications in the construction, mining, hauling and trucking sectors due to its enhanced heavy duty performance properties. This grease is also particularly useful in applications where melting-out or dripping of grease would cause damage to production or materials. This grease adheres to the surfaces extremely well with high film strength and provides superior water washout characteristics.



## PERFORMANCE DASHBOARD

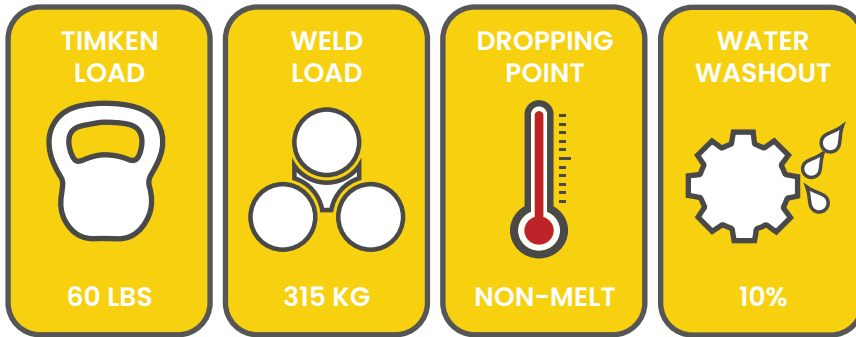

### PRIMARY INDUSTRIES



### HEALTH AND SAFETY

Based on available information, this product is not expected to produce adverse effects on health when used for the intended application and the recommendations provided in the Safety Data Sheet (SDS) are followed. SDS's are available upon request through your sales contract office, or via the Internet. This product should not be used for purposes other than its intended use.

If disposing of used product, take care to protect the environment. As with all cleaning and maintenance procedures, run-off from the cleaning or maintenance process should be diverted into a collection vessel and not allowed to soak into the ground or enter a storm sewer. If this product is spilled or contaminated and cannot be used, creating the need for disposal, wipe up or scrape up product and deposit in a sealable container. Thoroughly clean area with detergent solutions and rinse well with water.

#### ⚠️ WARNING!

Prolonged or repeated skin contact may cause irritation. Use protective wear to avoid eye and skin contact. Wash thoroughly after use. For skin contact, wash with soap and water. If swallowed, seek medical attention immediately. For eye contact, flush with water for 15 minutes and contact a physician. For additional information read the Safety Data Sheet for this product. **KEEP OUT OF REACH OF CHILDREN.**

### TECHNICAL DATA

TEST	METHOD	NEVERMELT™
NLGI	DATA	2.5
COLOR	DATA	RED
THICKENER	DATA	BENTONE/CLAY
TEXTURE	DATA	SUPER TACKY
VISCOSITY @ 40 cSt	ASTM D-445	460
TIMKEN LOAD	ASTM D-2509	60
WELD LOAD, kg	ASTM D-2596	315
DROPPING POINT	ASTM D-2265	NON-MELT
BASE OIL TYPE	DATA	MINERAL
WATER WASHOUT 175F %	ASTM D-1264	10%
RUST TEST	ASTM D-1743	PASS
COPPER CORROSION	ASTM D-4048	1b
% of LUBRICATING SOLIDS	DATA	N/A
VISCOSITY INDEX	DATA	90+

### AVAILABLE PACKAGING SIZES

