

# Induction Green Heat

Garland Induction Built-in Unit  
RTCSmp Module-Line "Two Cooking Zones"

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

## Models

- GI-MO/DU 7000-650
- GI-MO/DU 10000-650
- GI-MO/DU 7000-720
- GI-MO/DU 10000-720



Garland Modular Induction built-in concept with two cooking zones consisting of:

Induction generator, coil carrier sheet with coils and sensors, Ceran glass, control unit, as well as operation and cable kit.

Equipped with the latest RTCSmp (Realtime Temperature Control System) technology.

## Standard Features

### Induction generator:

- A powerful generator that is fully integrated in an enclosed housing and equipped with an integrated fan.
- All connections such as the mains cable, operation, CAN cable and sensor cable can be connected externally through plug connections.
- The generator is equipped with an air ducting system, through which the heated air is exhausted. Using this design, the risk of a thermal short-circuit is reduced.

### Control unit:

- The control unit is the information and diagnostic hub for the whole induction unit. It is connected with the generator via RJ45 cable. Compact design and easy to install using special installation tabs/brackets.

### Operation unit:

- The power switch regulates the temperature in power levels 1 to 12. Simple to operate; adjust the temperature setting simply by turning the knob.

### Mounting Frame:

- Installation/mounting frame is included with unit.

### Coil Carrier Sheet:

- Compact design with induction coils and sensors. Engineered specifically for modular kitchen designs.
- Round Coil: One pan is used for each heat-zone. Round coils have higher power density and energy efficiency.

### Safety above all:

- RTCSmp electronic temperature control that monitors the state of the induction coils, ceramic glass, heat sink and electronics.
- RTCSmp monitors the energy supply.
- Using a special control, interference noises are prevented when operating multiple cooking zones.
- Limiting the energy supply at peak load.
- Automatic monitoring when not cooking, also when using pans with a sandwich base.
- IR interface with diagnostic system.

## Options & Accessories

- Cable kit: 4m (SKU# 95000241) or 6 m (SKU# 95000242).


CE models comply with the latest European Norms:  
EN 60335-1, EN 60335-2-36, EN 62233 (EMC/EMV)

North American models:


ETL listed in compliance with  
UL 197, CSA C22.2 No.109, NSF-4  
Complies with FCC part 18, ICES-001

Induction Green Heat


## Induction Generator IN/GI-MO 7000/10000

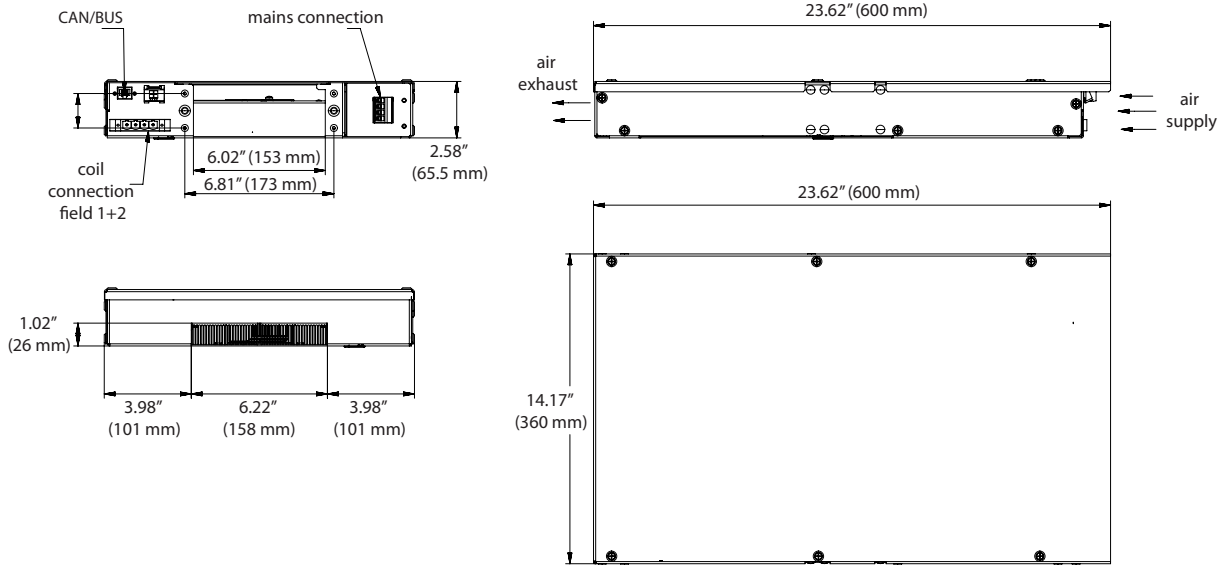


## Control Unit IN/GI-MO 7000/10000

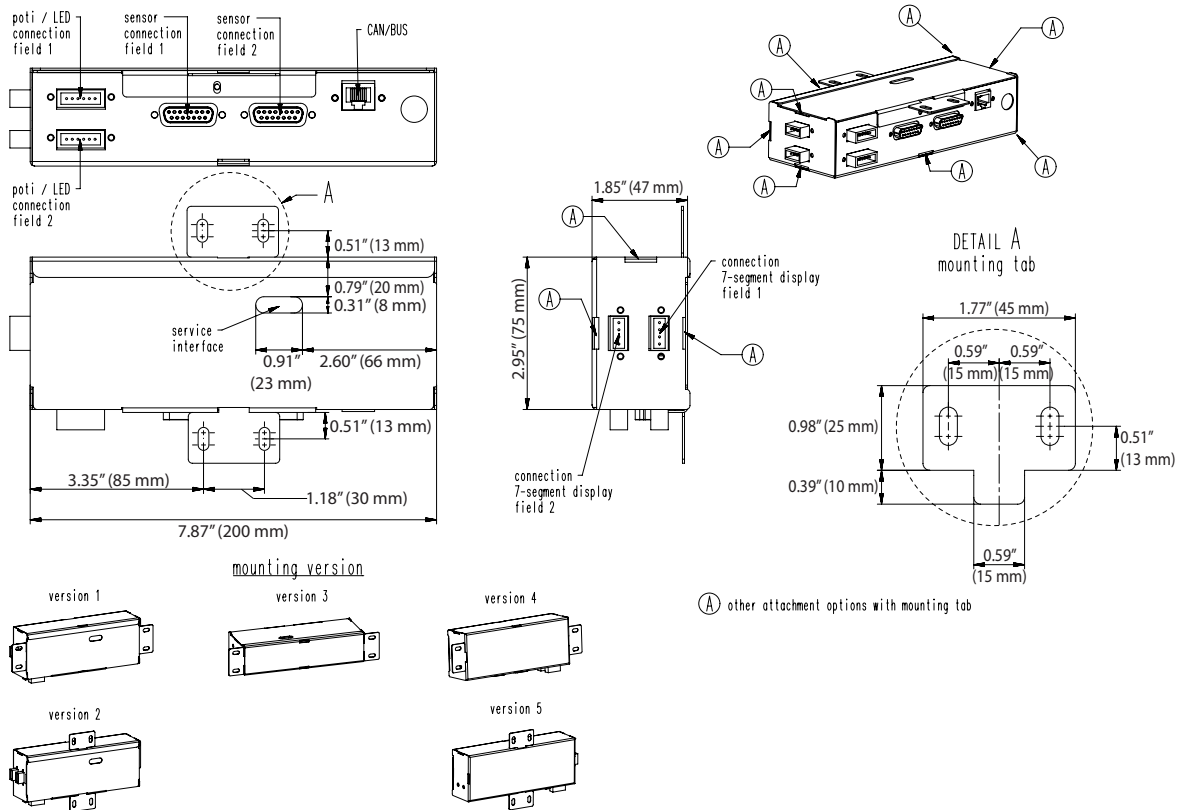

## Mounting Frame 375 x 650 mm

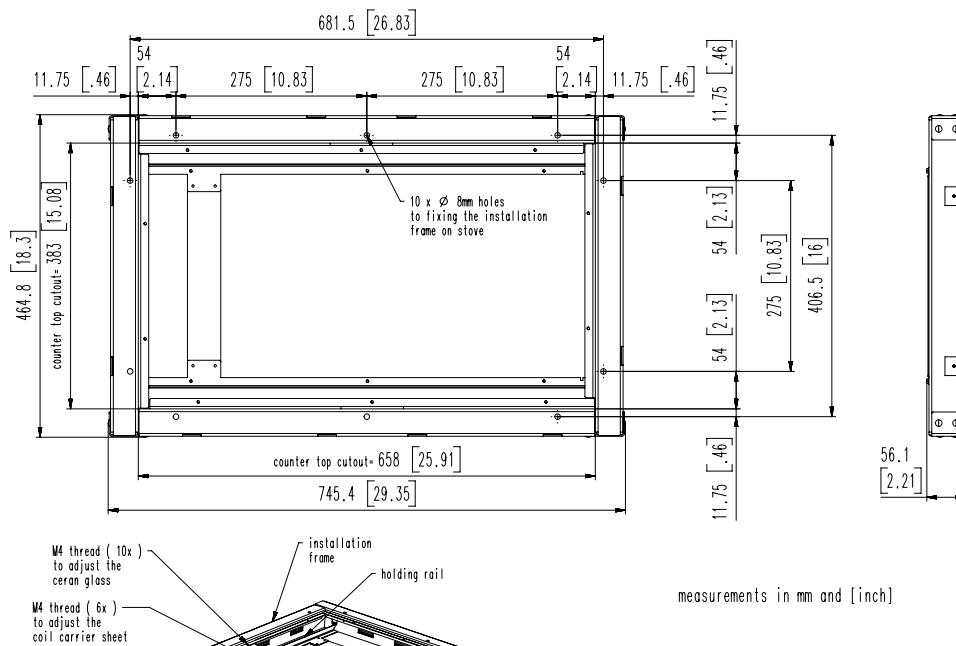

## Mounting Frame 360 x 720 mm

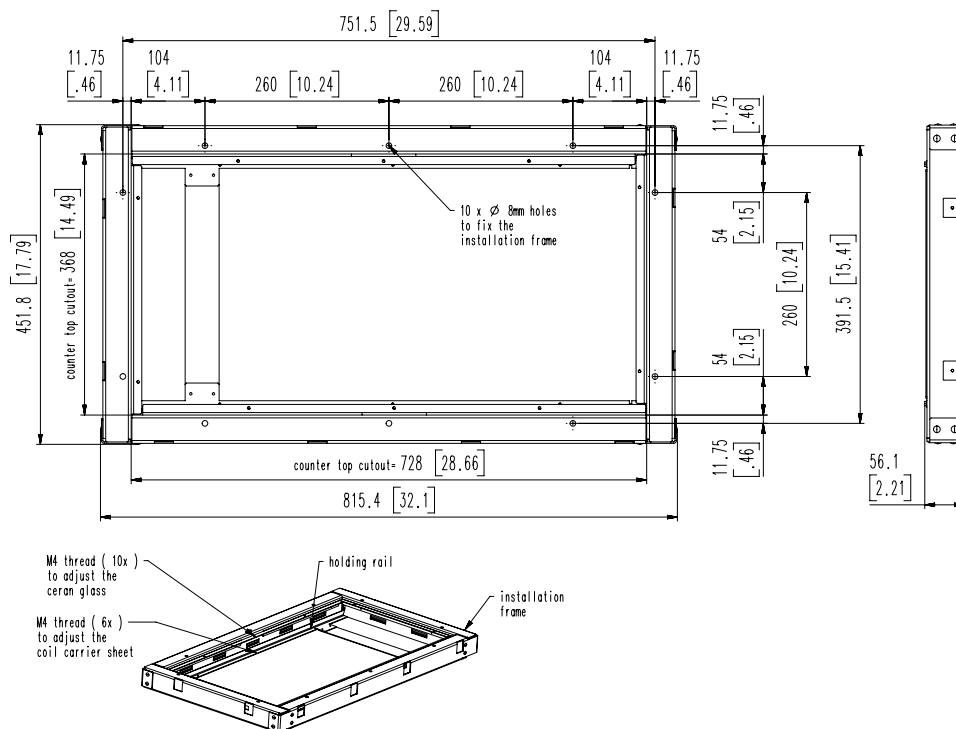

Model	Ceran Glass Inch (mm)	Mounting Frame Inch (mm)	Number of Round Coils	Size of Coils Inch (mm)	Power per Cooking Zone	Number of Cooking Zones	Total Rating
GI-MO/DU 7000-650	14.76x25.60x0.24 (375 x 650 x 6 )	14.76x25.60 (375 x 650)	2	010.63 (0270)	3.5 kW	2	7.0 kW
GI-MO/DU 10000-650	14.76x25.60x0.24 (375 x 650 x 6 )	14.76x25.60 (375 x 650)	2	010.63 (0270)	5.0 kW	2	10.0 kW
GI-MO/DU 7000-720	14.17x28.35x0.24 (360 x 720 x 6 )	14.17x28.35 (360 x 720)	2	010.63 (0270)	3.5 kW	2	7.0 kW
GI-MO/DU 10000-720	14.17x28.35x0.24 (360 x 720 x 6 )	14.17x28.35 (360 x 720)	2	010.63 (0270)	5.0 kW	2	10.0 kW


Electrical Loading				
Model	Watts	208/60/3	400/50/3	440/50/3
GI-MO/DU 7000	7000	22 amp	11 amp	10 amp
GI-MO/DU 10000	10000	30 amp	16 amp	15 amp

**Technical Data**

Generator housing: 23.62x14.17x2.58" (600 x 360 x 65.5 mm)  
 Network impedance (Zmax): 0.25 Ω  
 Air flow fan: 4238 ft<sup>3</sup>/h (120 m<sup>3</sup>/h maximum)  
 Cut out for air supply: 10.08 sq. in (6500 mm<sup>2</sup>, min)  
 Cable Kit: 8.2 ft (2.5 m)

Garland/ U.S. Range products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland/ U.S. Range will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Induction Green Heat



Please note QR code links to the manual for this product on our website [www.garland-group.com](http://www.garland-group.com)

Welbilt reserves the right to make changes to the design or specifications without prior notice.