The Encore Landscape Lighting System[™] combined with Encore's superior products will create beauty, safety, and security all in a simple-to-install system. The Encore Landscape Lighting System allows for easy installation of fixtures and transformers while delivering balanced voltage to each fixture, creating a consistent lighting portrait to every project.

The Encore Perfect Post Path System[™] offers the flexibility of interchanging the shades on each path light without replacing the entire fixture allowing for cost effective seasonal design changes.

TABLE OF CONTENTS

Brass Products

3ras	s Products	
	Path and Area Lighting	2-11, 13-21
	Up and Down Lighting	12, 22-25
	Bollards	15-17, 20-21
	Tiki Torch	19
	Deck and Step Lighting	26-33
	Hardscape and Under The Cap Lighting	30-31
	Inground and Soffit Lighting	32-34
	Well Lights and Inground Lighting	32-36
	Underwater Lighting	37-39
	Hanging Lights	40-41
	Wall Sconces	42-43
	Accessories	44-47
Copp	per Products	
	Path and Area Lighting	48
	Up Lighting	
Alum	inum Products	
	Path and Area Lighting	50-53
	Up and Down Lighting	54-55
Supp	oort Equipment and Information	
	Transformers and Accessories	56-57
	Lamp Guide	
	Kelvin Chart	
	Powder Coat Finishes	
	Warranty	64

Note: All products in this catalog are 12 volt unless noted.

DARE TO COMPARE

- Our exceptional quality and innovative product line uses the finest materials available, including solid brass, copper, stainless steel, and a superior grade of cast aluminum.
- Our innovative fixtures are user friendly and can be adjusted without the use of tools.
- Our lifetime warranty and unsurpassed service is second to none.
- Our state of the art factory and shipping department allow for orders to be processed and shipped the same day.

Encore Landscape Lighting Products are the choice by professionals who require reliable products of superior quality that will last a lifetime.



www.EncoreLandscapeLighting.com

Encore Landscape Lighting

2277 Elliott Drive Troy, MI 48083

Phone: 248-299-1919 • Fax: 248-299-1911 EncoreLandscapeLighting@hotmail.com

© 2022 Encore Landscape Lighting



APPLICATION	Illuminating Pathways, Bed Areas and Driveways				
CONSTRUCTION	BL-01-B	Spun	Brass Articulating Shade with		
		Angle	d Tubular Brass Post		
	BL-02 / BL-02-B	Solid	Cast Brass Shade with Heavy Brass Post		
INISH	Antiqued Brass				
/IRE LEAD	25 Feet of 18-2 Wire				
STAKE	X-801 Heavy Duty Ground Stake				
ED LAMP	3 Watt LED G4 Bi-Pin				
ED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin				
	Bluetooth RGBW L	ED (BL-	02 & BL-02-B)		
ENS	Clear and Frosted Glass Dome				
HEIGHT	BL-01-B	22"	Light Spread: 6-12'		
	BL-02 / BL-02-B	24"	Light Spread: 10-12'		
OTHER OPTIONS	Adjustable Telescoping Post: 6-10", 12-22", 18-36"				
	(For use with BL-02 & BL-02-B)				




(The adjustable risers are available with all pathway lights with the perfect post system)








APPLICATION	Illuminating Pathways, Bed Areas and Driveways				
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post				
FINISH	Antiqued Brass				
WIRE LEAD	25 Feet of 18-2 Wire				
STAKE	X-801 Heavy Duty Ground Stake				
LED LAMP	3 Watt LED G4 Bi-Pin				
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Bluetooth RGBW LED				
LENS	Clear and Frosted Glass Dome				
HEIGHT	21" Light Spread: 8-10'				
OTHER OPTIONS	Adjustable Telescoping Post: 6-10", 12-22", 18-36"				

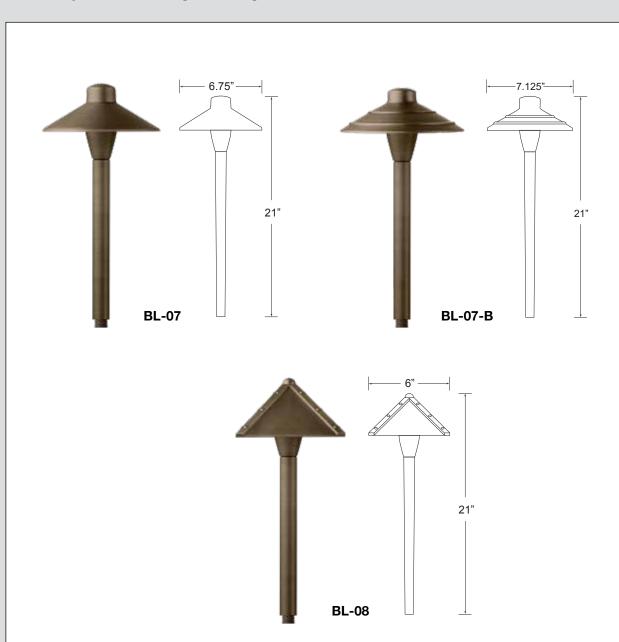


APPLICATION	Illuminating Pathways, Bed Areas and Driveways				
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post				
FINISH	Antiqued Brass				
WIRE LEAD	25 Feet of 18-2 Wire				
STAKE	X-801 Heavy Duty Ground Stake				
LED LAMP	3 Watt LED G4 Bi-Pin				
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Bluetooth RGBW LED				
LENS	Clear and Frosted Glass Dome				
HEIGHT	BL-07 / BL-07-B 21" Light Spread: 8-10'				
	BL-08 21"	Light Spread: 7-9'			
OTHER OPTIONS	Adjustable Telescoping F	ost: 6-10", 12-22", 18-36"			



APPLICATION	Illuminating Pathways, Bed Areas and Driveways				
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post				
	BL-09 Glass Shade with Brass Frame				
INISH	Antiqued Brass				
VIRE LEAD	25 Feet of 18-2 Wire				
STAKE	X-801 Heavy Duty Ground Stak	е			
LED LAMP	3 Watt LED G4 Bi-Pin				
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin				
	Bluetooth RGBW LED				
.ENS	Clear and Frosted Glass Dome				
HEIGHT	BL-09-A / BL-09-F / BL-09-H	24"	Light Spread: 9-11'		
	BL-10	21"	Light Spread: 6-8'		
	BL-11	21"	Light Spread: 8-10'		
OTHER OPTIONS	Adjustable Telescoping Post: 6-	10", 12-22	2", 18-36"		

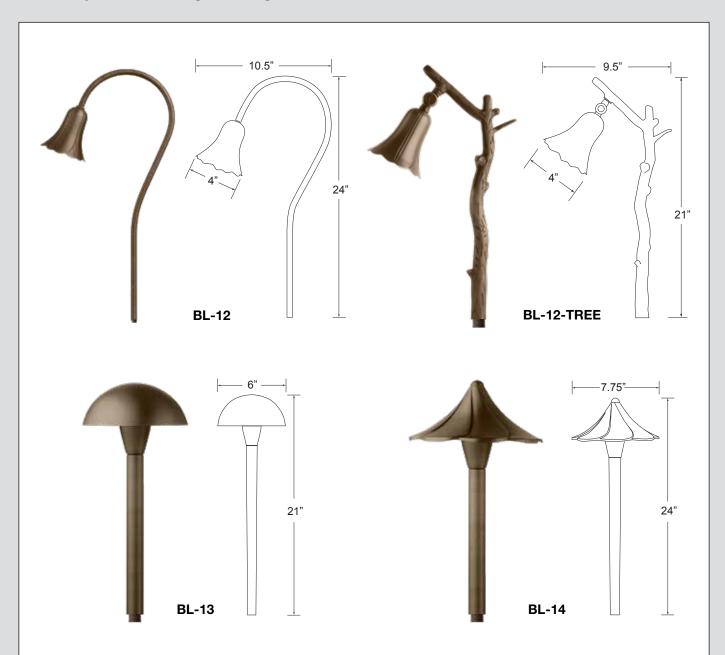

APPLICATION	Illuminating Pathways, Bed Areas and Driveways				
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post				
FINISH	Antiqued Brass	Antiqued Brass			
WIRE LEAD	25 Feet of 18-2 Wire				
STAKE	X-801 Heavy Duty Ground Stake				
LED LAMP	3 Watt LED G4 Bi-Pin				
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin				
	Bluetooth RGBW LED (BL-13 & BL-14)				
LENS	Clear and Frosted Glass Dome				
HEIGHT	BL-12	24"	Light Spread: 4-6'		
	BL-12-TREE	21"	Light Spread: 4-10'		
	BL-13	21"	Light Spread: 7-9'		
	BL-14	24"	Light Spread: 8-10'		
OTHER OPTIONS	Adjustable Tele	escoping	Post: 6-10", 12-22", 18-36"		
	(For use with E	BL-13 & I	BL-14)		

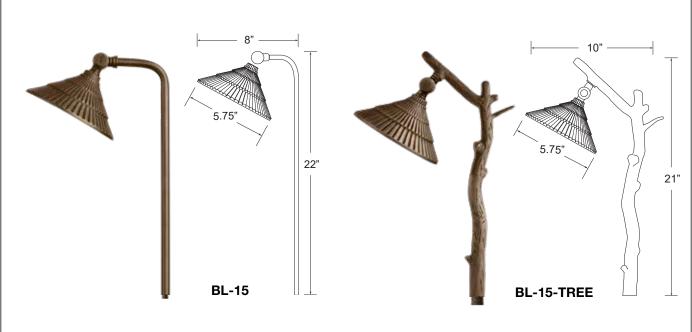




solid Cast Bras Intiqued Brass 5 Feet of 18-2 I-801 Heavy D	ss Shade S Wire	Bed Areas and Driveways with Heavy Brass Post			
ntiqued Brass 5 Feet of 18-2 -801 Heavy D	S 2 Wire				
5 Feet of 18-2 -801 Heavy D	2 Wire	and Otalia			
7-801 Heavy D		on al Chalca			
	uty Grou	un al Chalva			
Matt LED G/		X-801 Heavy Duty Ground Stake			
Wall LLD G	3 Watt LED G4 Bi-Pin				
1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin					
Bluetooth RGBW LED (BL-63)					
Clear and Frosted Glass Dome					
BL-15	22"	Light Spread: 7-9'			
L-15-TREE	21"	Light Spread: 4-10'			
BL-63	23"	Light Spread: 6-8'			
djustable Tele	scoping	Post: 6-10", 12-22", 18-36"			
or use with B	L-17 & E	BL-63)			
3 3	Watt, 2 Watt, luetooth RGB lear and Frosi L-15 L-15-TREE L-63 djustable Tele	Watt, 2 Watt, 4 Watt L luetooth RGBW LED (lear and Frosted Glass L-15 22" L-15-TREE 21" L-63 23"			


PATH & AREA LIGHTING




Clear and Frosted Glass Dome 21" Light Spread: 8-10'				
Clear and Frosted Glass Dome				
Bluetooth RGBW LED				
1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin				
3 Watt LED G4 Bi-Pin				
X-801 Heavy Duty Ground Stake				
25 Feet of 18-2 Wire				
Antiqued Brass / Aged Verde				
Solid Cast Brass Shade with Heavy Brass Post				
Illuminating Pathways, Bed Areas and Driveways				

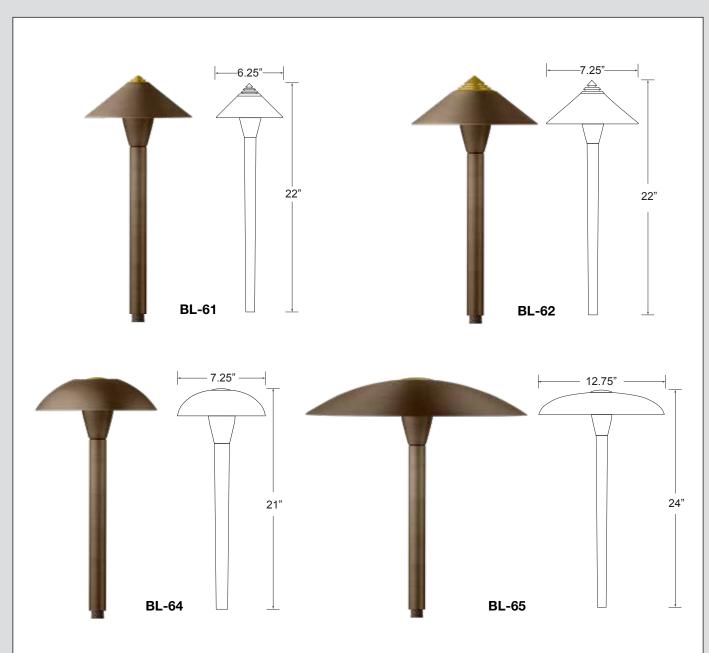


ICATION Illuminating Pathways, Bed Areas and Driveways					
Solid Cast Brass Shade with Heavy Brass Post					
Antiqued Brass					
25 Feet of 18-2 Wire					
X-801 Heavy Duty Ground Stake					
3 Watt LED G4 Bi-Pin					
1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin					
Bluetooth RGBW LED					
Clear and Frosted Glass Dome					
BL-61 22" Light Spread: 7-9'					
BL-62 22" Light Spread: 8-10'					
BL-64 21" Light Spread: 8-10'					
BL-65 24" Light Spread: 12-15'					
Adjustable Telescoping Post: 6-10", 12-22", 18-36"					

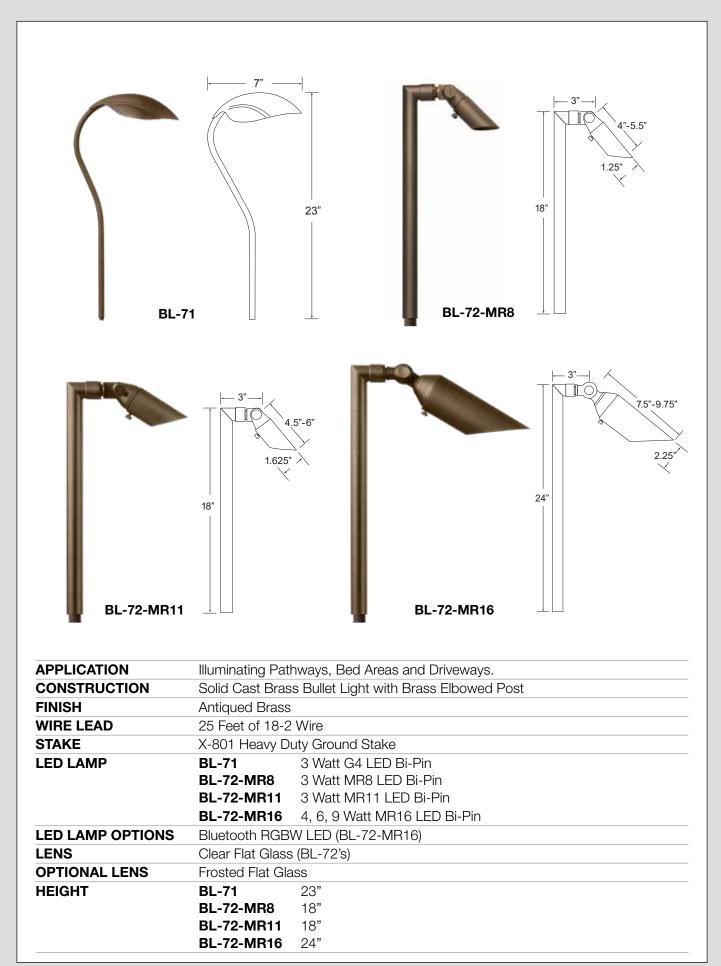


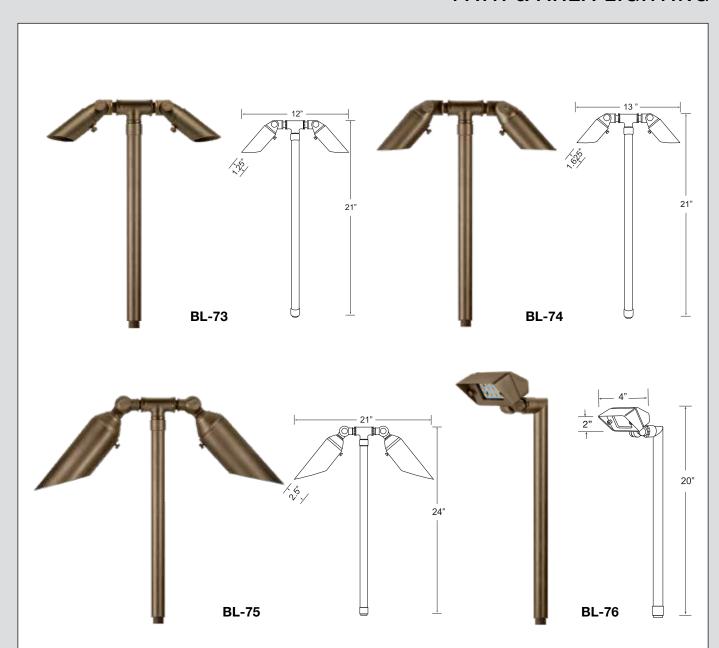



APPLICATION	Illuminating Path	ways, Bed Areas and Driveways		
CONSTRUCTION	Bullet Light with Brass Tee/Elbowed Post			
FINISH	Antiqued Brass			
WIRE LEAD	E LEAD 25 Feet of 18-2 Wire			
STAKE	X-801 Heavy Duty Ground Stake			
LED LAMP	BL-73	(2) 3 Watt MR8 LED Bi-Pin		
	BL-74	(2) 3 Watt MR11 LED Bi-Pin		
	BL-75	(2) 4, 6, 9 Watt MR16 LED Bi-Pin		
	BL-76	3 Watt LED Panel		
LED LAMP OPTIONS Bluetooth RGBW LED (BL-75)				
LENS	Clear Flat Glass			
OPTIONAL LENS	Frosted Flat Glass			
HEIGHT	BL-73 / BL-74	21"		
	BL-75	24"		
	BL-76	20"		

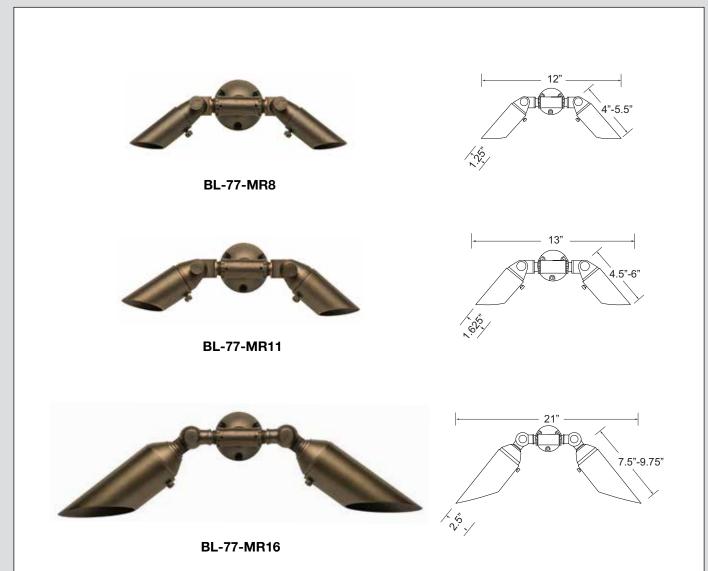


APPLICATION	Down Lighting from Walls or in Trees				
CONSTRUCTION	Solid Cast Brass Bullet Light with Brass Tee and Brass Round Mount				
FINISH	Antiqued Brass				
WIRE LEAD	25 Feet of 18-2 Wire				
LED LAMP	BL-77-MR8	3 Watt MR8 LED Bi-Pin			
	BL-77-MR11	3 Watt MR11 LED Bi-Pin			
	BL-77-MR16	4, 6, 9 Watt MR16 LED Bi-Pin			
LED LAMP OPTIONS	Bluetooth RGBW LED (BL-77-MR16)				
LENS	Clear Flat Glass				
OPTIONAL LENS	Frosted Flat Gla	SS			



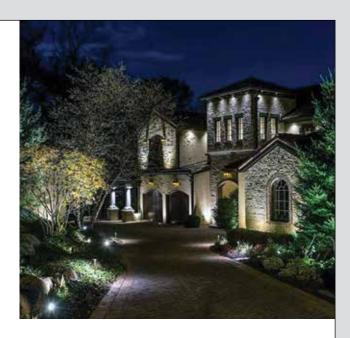






BL-78 with Shroud

BL-78 with Riser

APPLICATION	Illuminating Pathways and Bed Areas
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
STAKE	X-800 Heavy Duty Ground Stake
LED LAMP	3 Watt LED G4 Bi-Pin
LED LAMP OPTIONS	1 Watt, 2 Watt LED G4 Bi-Pin
LENS	Frosted Glass

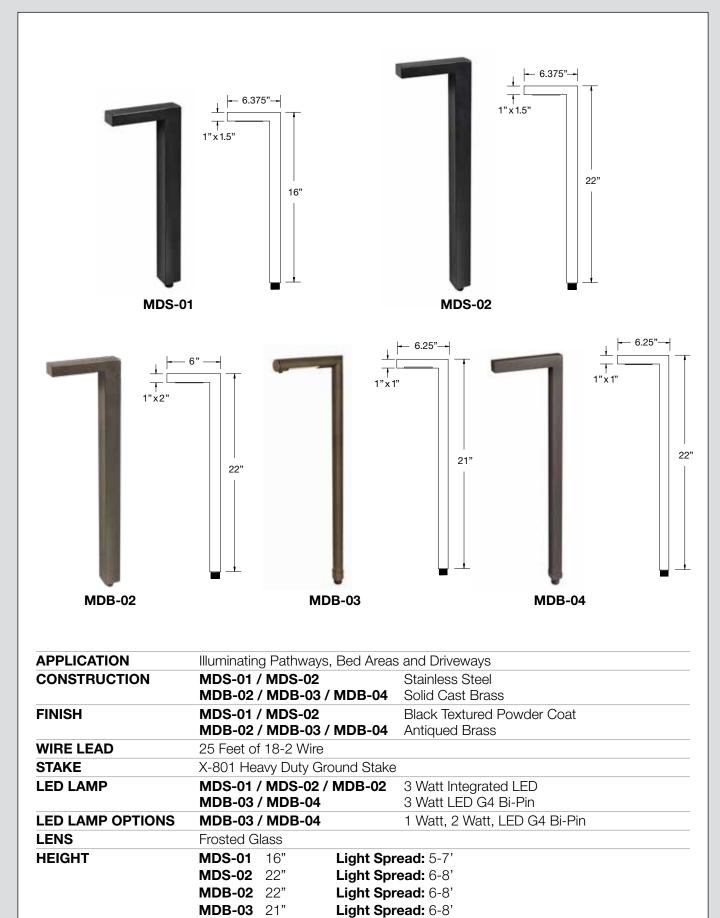


Light Spread: 6-8'


MDB-04 22"



APPLICATION	Illuminating P	athways, Bed	Areas and Driveways
CONSTRUCTION	Solid Cast Br	ass	
FINISH	Antiqued Bra	SS	
WIRE LEAD	25 Feet of 18	3-2 Wire	
STAKE	X-801 Heavy	Duty Ground	Stake
LED LAMP	MDB-06 / M	DB-07 / BOL	-18 4 Watt Integrated LED
	MDB-05		3 Watt LED Module
LENS	Frosted Glass	3	
HEIGHT	MDB-05 18	5" Li	ght Spread: 4-6'
	MDB-06 23	3" Li	ght Spread: 8-10'
	MDB-07 2	1" Li	ght Spread: 8-10'
	BOL-18 9'	' Li	ght Spread: 6-8'

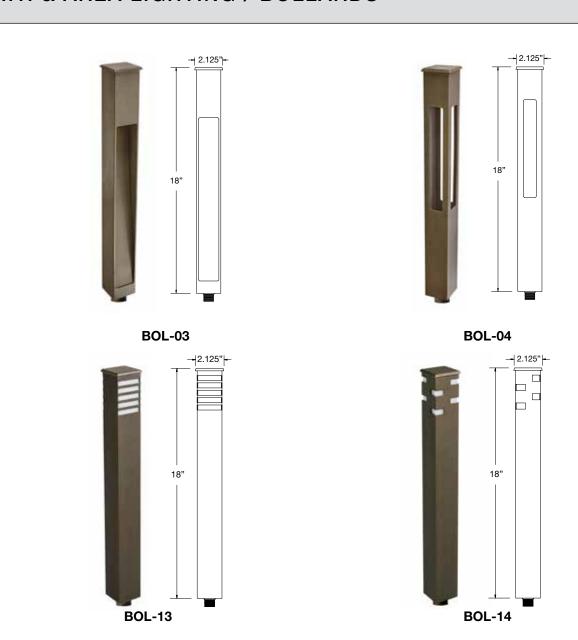

APPLICATION	Illuminating Pathways,	, Bed Areas and Driveways
CONSTRUCTION	Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	X-801 Heavy Duty Gro	ound Stake
LED LAMP	BOL-03 / BOL-04	4 Watt Integrated LED
	BOL-13 / BOL-14	4 Watt LED G4 Bi-Pin
HEIGHT	BOL-03 18"	Light Spread: 4-6'
	BOL-04 18"	Light Spread: 6-8'
	BOL-13 18"	Light Spread: 4-6'
	BOL-14 18"	Light Spread: 4-6'

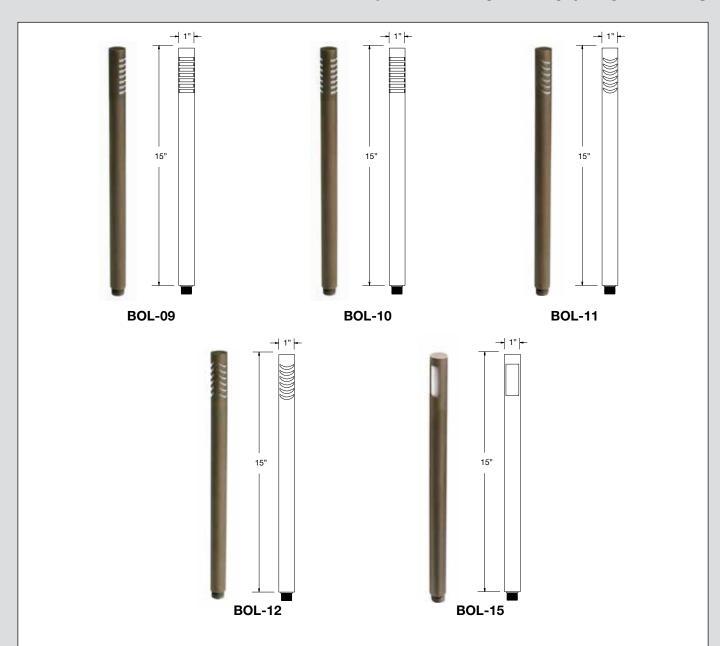

APPLICATION	Illuminating	g Pathways, B	ed Areas and Driveways		
CONSTRUCTION	Brass				
FINISH	Antiqued E	Brass			
WIRE LEAD	25 Feet of	18-2 Wire			
STAKE	X-800 Hea	avy Duty Grour	nd Stake		
LED LAMP	3 Watt G4	3 Watt G4 LED Bi-Pin			
LED LAMP OPTIONS	1 Watt, 2 \	1 Watt, 2 Watt G4 LED Bi-Pin			
HEIGHT	BOL-09	15"	Light Spread: 6-8'		
	BOL-10	15"	Light Spread: 6-8'		
	BOL-11	15"	Light Spread: 6-8'		
	BOL-12	BOL-12 15" Light Spread: 6-8'			
	BOL-15	15"	Light Spread: 6-8'		

PATH & AREA LIGHTING



APPLICATION	Illuminating Pat	Illuminating Pathways, Bed Areas and Driveways			
CONSTRUCTION	Solid Brass				
FINISH	Antiqued Brass	3			
WIRE LEAD	25 Feet of 18-2	25 Feet of 18-2 Wire			
STAKE	X-801 Heavy D	X-801 Heavy Duty Ground Stake			
LED LAMP	BL-201-HL	A19 Medium Base LED Lamp 2 Watt, 4 Watt or 6 Watt Bluetooth RGBW LED			
	BL-202-HL	MR16 LED 4 Watt or 6 Watt G4 LED 4 Watt Bi-Pin Bluetooth RGBW LED			
	BL-203-HL	G4 LED 4 Watt Bi-Pin Bluetooth RGBW LED			



APPLICATION	Illuminating Pathways, Bed Areas, Driveways, Deck Areas, Entertainment Areas			
CONSTRUCTION	Solid Cast Brass Shade with Heavy Brass Post Two in One - Oil Filled Reservoir for Flame Effect and LED Light Source			
FINISH	Antiqued Brass			
WIRE LEAD	25 Feet of 18-2 Wire			
STAKE	X-805 Super Heavy Duty Three Prong Brass Ground Stake			
LED LAMP	4 Watt LED G4 Bi-Pin			
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt LED G4 Bi-Pin			
LENS	Clear and Frosted Glass Dome			
HEIGHT	60" Light Spread: 12-15'			




ADDUIGATION			A 1D'		
APPLICATION	Illuminating Pathways, Bed Areas and Driveways				
CONSTRUCTION	Solid Cast Brass				
FINISH	Antiqued Brass				
WIRE LEAD	25 Feet of 18-2 Wire	Э			
MOUNTING	Brass Mounting Plat	te with X	7-801 Heavy Duty Ground Stake or X-805 Tri-Stake		
LED LAMP	4 Watt LED MR16				
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Wa	att, 4 Wa	att LED G4 Bi-Pin		
	3 Watt MR8 or MR11 LED				
	6 Watt MR16 LED, 9 Watt MR16				
	Bluetooth RGBW LED				
LENS	Clear Glass				
HEIGHT	BOL-01	14"	Light Spread: 8-10'		
	BOL-02 / BOL-20	26"	Light Spread: 10-12'		
SPECIAL FEATURE	Surface Mount or St	ake Mo	unt		






	BOL-202	BOL-202-B	BOL-211
Fixture Height	26"	26"	26"
Post Diameter	2.375"	2.375"	2.375"
Surface Mounting Plate	Included	Included	Included
X-801 Heavy Duty Stake	Included	Included	Included

APPLICATION	Illuminating Pathways, Bed Areas and Driveways
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
MOUNTING	Brass Mounting Plate with X-801 Heavy Duty Ground Stake or X-805 Tri-Stake
LED LAMP	4 Watt LED MR16
LED LAMP OPTIONS	1 Watt, 2 Watt, 3 Watt, 4 Watt LED G4 Bi-Pin 3 Watt MR8 or MR11 LED 6 Watt MR16 LED or 9 Watt MR16 LED Bluetooth RGBW LED
SPECIAL FEATURES	Can Be Mounted to a Flat Surface or Stake Mounted

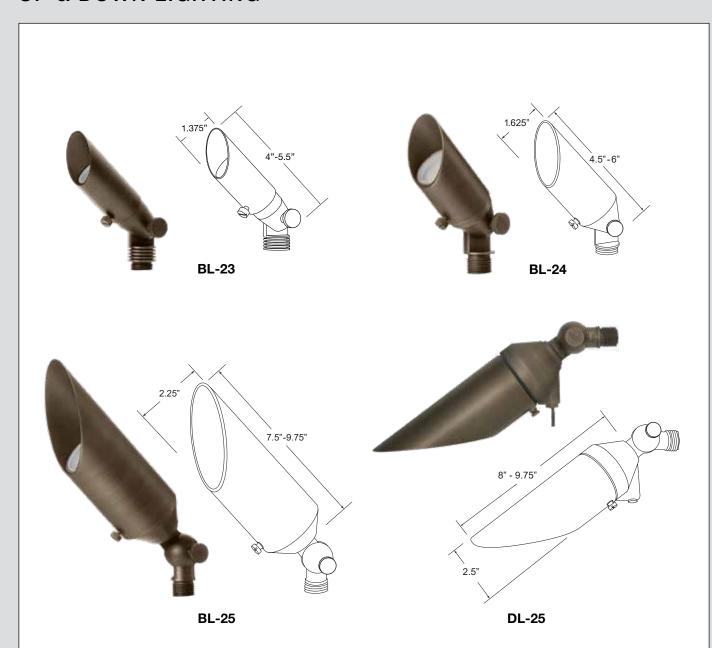

APPLICATION	Up or Down Ligh	Up or Down Lighting of Trees, Homes and Structures		
CONSTRUCTION	Solid Cast Brass	s with Telescoping,		
	360 Degree Rota	atable Shroud		
FINISH	Antiqued Brass			
WIRE LEAD	25 Feet of 18-2 Wire			
	DL-25	50 Feet of 18-2 Wire		
STAKE	X-800 Heavy Du	X-800 Heavy Duty Ground Stake (BL-23, BL-24, BL-25)		
LED LAMP	BL-23	3 Watt LED MR8		
	BL-24	3 Watt LED MR11		
	BL-25 / DL-25	4 Watt, 6 Watt, or 9 Watt LED MR16		
LED LAMP OPTIONS	BL-25 / DL-25	Bluetooth RGBW LED		
LENS	Clear Glass	Clear Glass		
OPTIONAL LENS	Frosted, Linear, I	Honeycomb, Moonlight Blue		

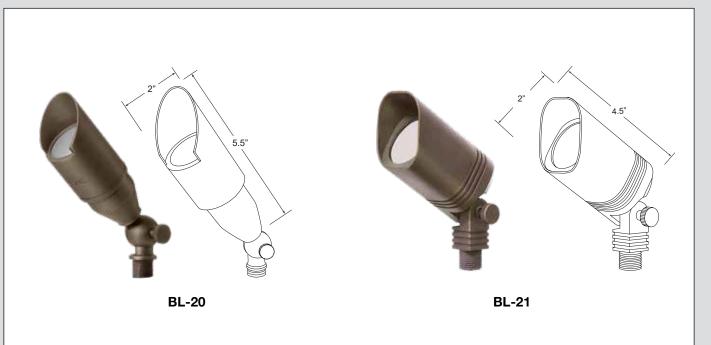




APPLICATION	Up or Down Lighting of Trees, Homes and Structures
CONSTRUCTION	Solid Cast Brass
FINISH	Antiqued Brass
WIRE LEAD	25 Feet of 18-2 Wire
STAKE	X-800 Heavy Duty Ground Stake
LED LAMP	BL-20 / BL-21 4 Watt or 6 Watt LED MR16
	BL-26 / BL-28 4 Watt, 6 Watt, or 9 Watt LED MR16
LED LAMP OPTIONS	BL-26 / BL-28 Bluetooth RGBW LED
LENS	Clear Glass
OPTIONAL LENS	Frosted, Linear, Honeycomb, Moonlight Blue



BL-32

APPLICATION	Up or Down Ligh	Up or Down Lighting of Trees, Homes and Structures		
CONSTRUCTION	Solid Cast Brass	3		
FINISH	Antiqued Brass			
WIRE LEAD	25 Feet of 18-2	Wire		
STAKE	BL-29	X-800 Heavy Duty Ground Stake		
	BL-32	X-801 Heavy Duty Ground Stake		
LED LAMP	BL-29	4 Watt, 6 Watt, or 9 Watt LED MR16		
	BL-32	10 Watt LED PAR36		
LED LAMP OPTIONS	BL-32	6 Watt, 13 Watt, 17 Watt LED PAR36		
	BL-29 / BL-32	Bluetooth RGBW LED		
LENS	Clear Glass			
OPTIONAL LENS	Frosted, Linear, I	Honeycomb, Moonlight Blue		

UP & DOWN WALL WASHER / FLOOD LIGHTING

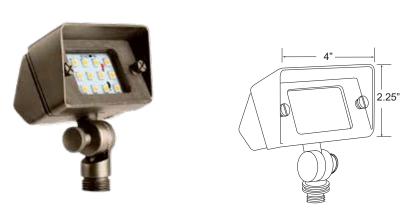

BL-30



BL-31


APPLICATION	Up or Down Lighting of Walls, Signs, Buildings, Homes, Water Features and Structures		
CONSTRUCTION	Solid Cast E	Brass	
FINISH	Antiqued Br	ass	
WIRE LEAD	25 Feet of 1	8-2 Wire	
STAKE	BL-30	X-800 Heavy Duty Ground Stake	
	BL-31	X-801 Heavy Duty Ground Stake	
LED LAMP	BL-30	3 Watt LED Panel	
	BL-31	6 Watt LED Panel	
LED LAMP OPTIONS	BL-31	4 Watt or 6 Watt LED MR16	
	BL-30	3 Watt or 4 Watt G4 LED	
	BL-31	20 Watt Super Bright LED Panel	
	BL-31	Bluetooth RGBW LED	
LENS	Clear, Frosted and Linear Glass		



Illuminating Decks, Steps, Posts, Outdoor Kitchens, Walls & Docks	
Solid Brass	
SD-01-BR	Natural Brass or Powder Coated
SD-02 / SD-40	Antiqued Brass
MICRO LIGHTS	Nickel, Black, or White
25 Feet of 18-2 Wire	
SD-01-BR / SD-02	3 Watt LED G4 Bi-Pin
MICRO LIGHTS	1 Watt LED Integrated
SD-40	Integrated Adjustable CCT (Kelvin)
	Adjustable from 2200k to 5000k with
	Dimming Options
SD-01-BR / SD-02	1 Watt or 2 Watt G4 Bi-Pin
	Solid Brass SD-01-BR SD-02 / SD-40 MICRO LIGHTS 25 Feet of 18-2 Wire SD-01-BR / SD-02 MICRO LIGHTS SD-40

DECK / STEP / PAVER LIGHTING



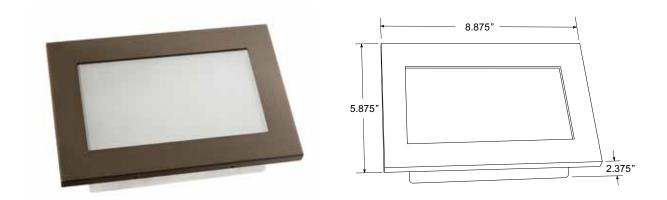


SD-60 BRICK PAVER

APPLICATION	Illuminating Decks, Steps, Posts, Outdoor Kitchens, Walls & Docks, Brick Pavers	
CONSTRUCTION	Solid Brass	
FINISH	SD-46 / SD-47	Antiqued Brass
	SD-60	Antiqued Brass Cover, Stainless Steel Body
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	SD-46 / SD-47	3 Watt LED G4 Bi-Pin
	SD-60	3 Watt LED Panel
LENS	Frosted Glass	
SPECIAL FEATURE	SD-60 The rectangle trim cover can be powder coated to match any color brick	
	· · · · · · · · · · · · · · · · · · ·	




APPLICATION	Illuminating Decks, Steps, Posts, Outdoor Kitchens, Walls & Docks	
CONSTRUCTION	Solid Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	2 Watt LED Panel	
LENS	Frosted Lens	




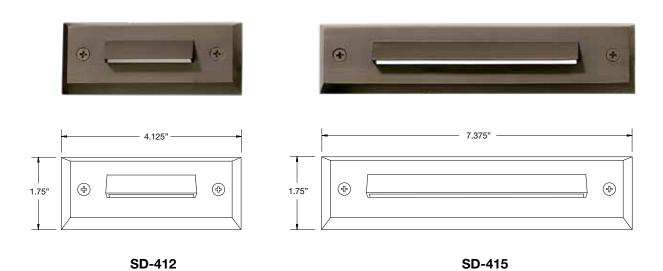

APPLICATION	Illuminating Decks, Steps, Posts, Outdoor Kitchens, Walls & Docks	
CONSTRUCTION	Solid Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	2 Watt Dimmable LED Panel	
LENS	Frosted Lens	


HARDSCAPE LIGHTING

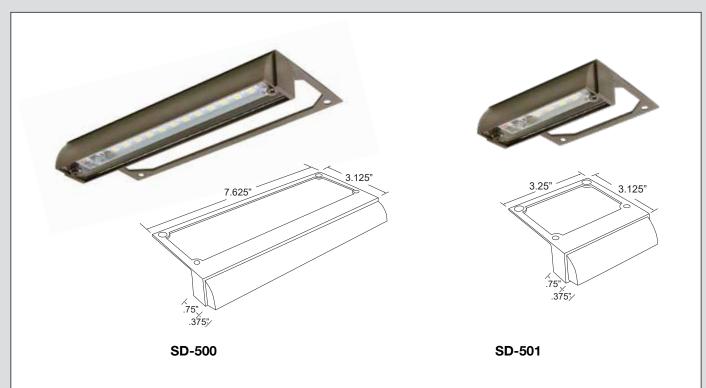

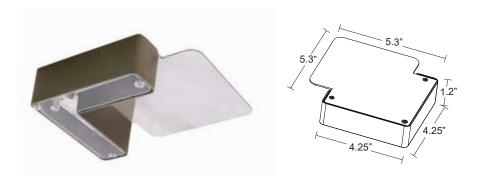


SD-505

LENS	Clear and Frosted G	Clear and Frosted Glass	
	SD-501	SD-501 2 Watt LED Lighting Strip	
LED LAMP	SD-500 / SD-505	SD-500 / SD-505 3 Watt LED Lighting Strip	
WIRE LEAD	25 Feet of 18-2 Wire	25 Feet of 18-2 Wire	
FINISH	Antiqued Brass	Antiqued Brass	
CONSTRUCTION	Solid Brass	Solid Brass	
	Outdoor Kitchens	Outdoor Kitchens	
APPLICATION	Illuminating Retainin	Illuminating Retaining Walls, Seat Walls, Steps, Decks, Railings,	

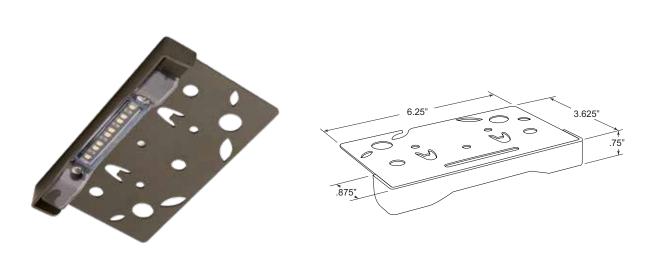

SD-506

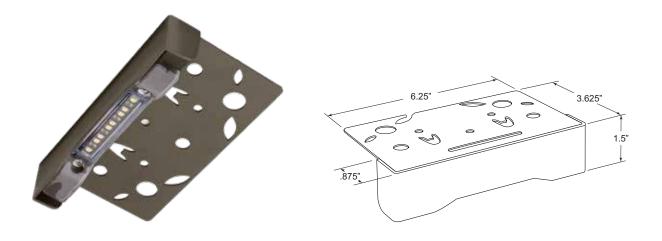

SD-508 RGBW

APPLICATION	Illuminating Retaining Walls, Seat Walls, Steps, Decks, Railings, Outdoor Kitchens	
CONSTRUCTION	Solid Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	SD-506 2 Watt LED Light Strip SD-508 3 Watt LED RGBW Bluetooth Light Strip	
LENS	Clear and Frosted Glass	
SPECIAL FEATURES	Removable Front Plate for Easy Powder Coat Color Match	
	~	

UP LIGHTING / INGROUND LIGHTING




APPLICATION	Up Lighting of Trees, Walls, Homes, Columns, Pillars, Steps, Walkways	
CONSTRUCTION	Solid Cast Brass with Composite Sleeve	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	WL-80 / 81 / 83 MR8 LED	
LENS	Clear Flat Glass	
OPTIONAL LENS	Frosted Flat Glass	

DECK / PAVER / INGROUND LIGHTING








APPLICATION	Illuminating Walks, Pathways, Outdoor Kitchens, Soffit Lighting, Wall Lighting	
CONSTRUCTION	Stainless Steel with Composite Sleeve	
FINISH	Nickel, Black, White or Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	1 Watt or 3 Watt Integrated LED	
LENS	Clear Flat Glass	

INGROUND WELL LIGHTING



APPLICATION	Up Lighting of Trees, Walls, Homes, Columns, Pillars, Steps, Walkways	
CONSTRUCTION	Solid Cast Brass Cover and Body with Composite Sleeve	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
STAKE	X-800 Heavy Duty Ground Stake	
LED LAMP	4, 6, or 9 Watt LED MR16	
LED LAMP OPTIONS	Bluetooth RGBW LED	
LENS	Clear Flat Glass	
OPTIONAL LENS	Frosted Flat Glass	
OPTIONAL COVER	X-100-BRASS RING to be used as a Debris Guard when installed in Mulch or Turf	
SPECIAL FEATURES	Brass Body and Cover with Composite Sleeve for Easy Installation in Concrete and Pavers. Each Fixture comes with an X-800 Stake for stable Installation	

WELL LIGHTS & INGROUND LIGHTS

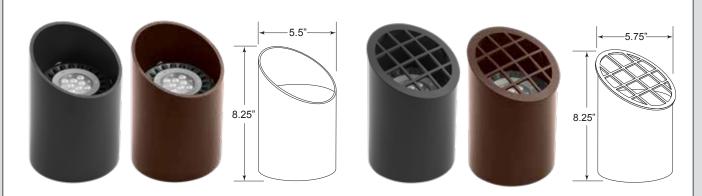

WL-235-BK / WL-235-LB

WL-335-BK / WL-335-LB



WL-435-BK / WL-435-LB

APPLICATION	Up Lighting of Trees, Walls, Homes, Columns, Pillars	
CONSTRUCTION	Composite Body with Stainless Steel Adjustable Gimble Ring	
	WL-435 Solid Cast Brass Cover with Glass Composite Body with Stainless Steel Adjustable Gimble Ring	
FINISH	Black or Brown	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	WL-235 / WL-335 / WL-435 6, 10, 13, or 17 Watt LED PAR36	
LED LAMP OPTIONS	Bluetooth RGBW LED	
OPTIONAL LENS	Clear or Frosted Glass Lens	

WELL LIGHTS & INGROUND LIGHTS



APPLICATION	Up Lighting of Trees, Walls, Homes, Columns, Pillars	
CONSTRUCTION	WL-113 / WL-115 / WL-116	Solid Cast Brass Cover with Composite Body
	WL-25	Solid Cast Brass
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	WL-115 / WL-116	6, 10, 13, or 17 Watt LED PAR36
	WL-113 / WL-25	4, 6, or 9 Watt MR16 LED
LED LAMP OPTIONS	Bluetooth RGBW LED	
LENS	Clear Flat Glass	
OPTIONAL LENS	Frosted Flat Glass	

UNDERWATER LIGHTING



APPLICATION	Underwater and Inground Up Lighting		
CONSTRUCTION	Stainless Steel Fixture with Composite Body Sleeve		
FINISH	Stainless Steel		
WIRE LEAD	25 Feet of 18-2 Wire		
LED LAMP	Integrated LED 3 Watt, 6 Watt or 9 Watt Warm White or RGB with DMX Controller for Many Color Options and Color Changing Modes		
LENS	Clear Flat Glass		

UNDERWATER LIGHTING



Underwater and Up Lighting		
Called Coast Dynam		
Solid Cast Brass		
Natural Brass		
25 Feet of 18-2 Wire		
4 Watt or 6 Watt LED MR16		
Clear Flat Glass		

UNDERWATER LIGHTING






UL-53

APPLICATION	Underwater and Up Lighting			
CONSTRUCTION	Stainless Steel			
FINISH	Stainless Steel	Stainless Steel		
WIRE LEAD	25 Feet of 18-2 Wire			
LED LAMP	UL-52 UL-52 RGB	9 Watt Integrated LED (Underwater Rated)9 Watt Integrated LED (Underwater Rated)Color-changing with DMX Controller		
	UL-53	3 Watt Integrated LED (Underwater Rated)		
SPECIAL FEATURES	Underwater or Inground Applications			
LENS	Clear Flat Glass			

DMX-512 CONTROLLER




APPLICATION	Illuminating Decks, Porches, Outdoor Kitchens, Sun Rooms, Gazebos, Patios		
CONSTRUCTION	Solid Brass		
FINISH	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire		
LED LAMP	HL-201 HL-200 / HL-202 / HL-2	Medium Base A19 12 Volt or 120 Volt LED	
		3 Watt LED G4 Bi-Pin	
LED LAMP OPTIONS	HL-201	Bluetooth RGBW LED	
	HL-200 / HL-202 / HL-203 / HL-204		
		1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin	
		3 Watt MR8 or MR11 LED	
		4 Watt or 6 Watt MR16 LED	
		Bluetooth RGBW LED	

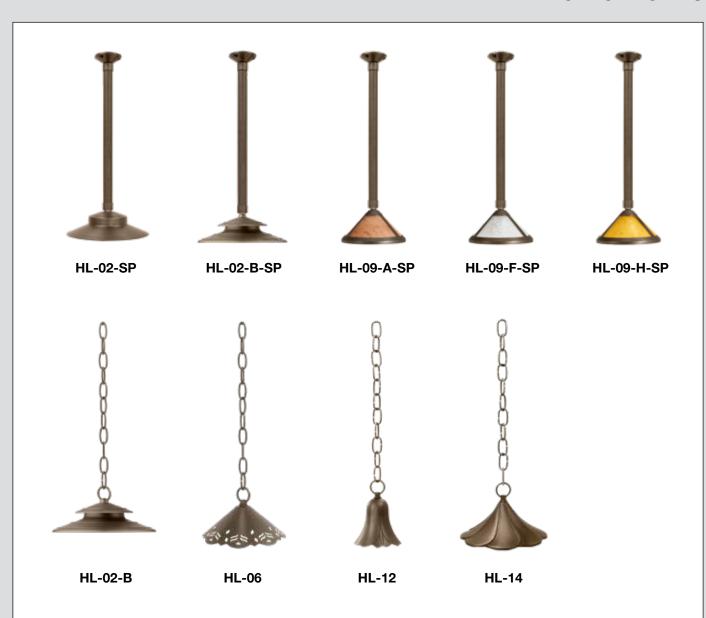

APPLICATION	Illuminating Decks, Porches, Outdoor Kitchens, Sun Rooms,	
	Gazebos, Patios	
CONSTRUCTION	Solid Brass	
FINISH	Antiqued Brass	
WIRE LEAD	25 Feet of 18-2 Wire	
LED LAMP	3 Watt LED G4 Bi-Pin	
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin	
LENS	Clear and Frosted Glass Dome	






APPLICATION	Illuminating Front Entrance Ways, Porches, Decks, Walls, Garages			
CONSTRUCTION	Solid Brass	Solid Brass		
FINISH	Antiqued Brass	Antiqued Brass		
WIRE LEAD	25 Feet of 18-2 Wire			
LED LAMP	WS-01 / WS-02 (2) 3 Watt LED Bi-Pin			
	WS-03 (2) Medium Base A-19 LED (12v or 120v)			
LED LAMP OPTIONS	WS-03 Bluetooth RGBW LED			



APPLICATION	Illuminating Front Entrance Ways, Porches, Decks, Walls, Garages			
CONSTRUCTION	Solid Brass	Solid Brass		
FINISH	Antiqued Brass	S		
WIRE LEAD	25 Feet of 18-2	25 Feet of 18-2 Wire		
LED LAMP	WS-04 WS-05 WS-06 WS-100	(2) 4 Watt LED MR164 Watt LED MR163 Watt LED Integrated4 Watt LED MR16		
LED LAMP OPTIONS	WS-04 WS-05	Bluetooth RGBW LED Bluetooth RGBW LED		
SPECIAL FEATURES	WS-100	Available with Most Shades. Please Specify the Shade when Ordering (The Picture Above is Shown with the BL-19 Shade)		

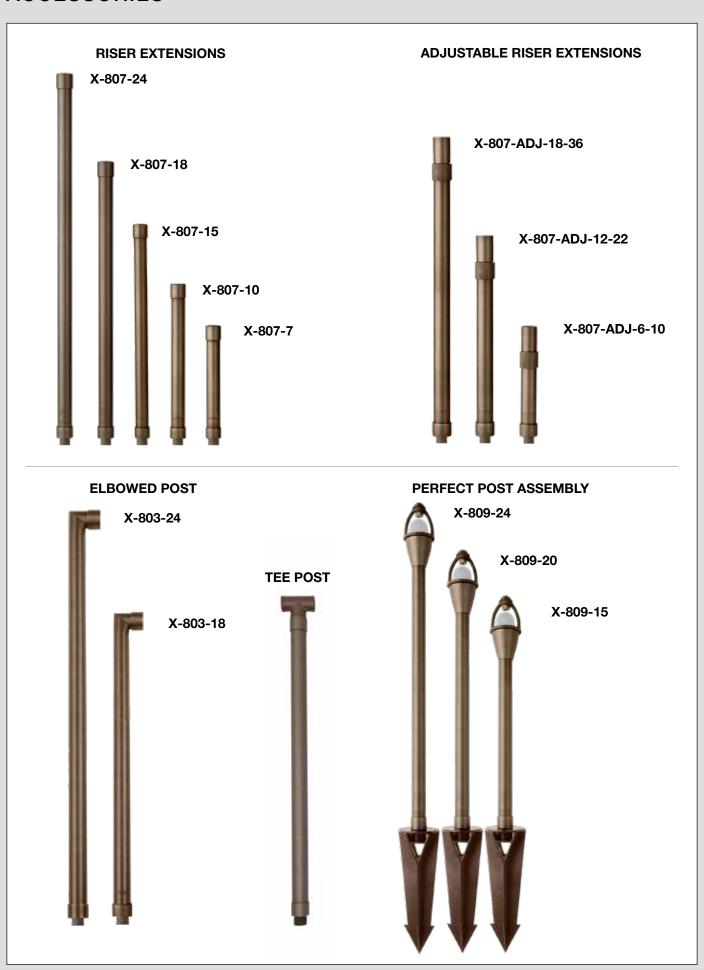


ACCESSORIES





X-813-AB

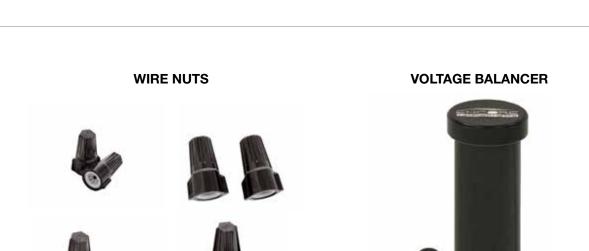


X-815


X-900


X-818

ACCESSORIES

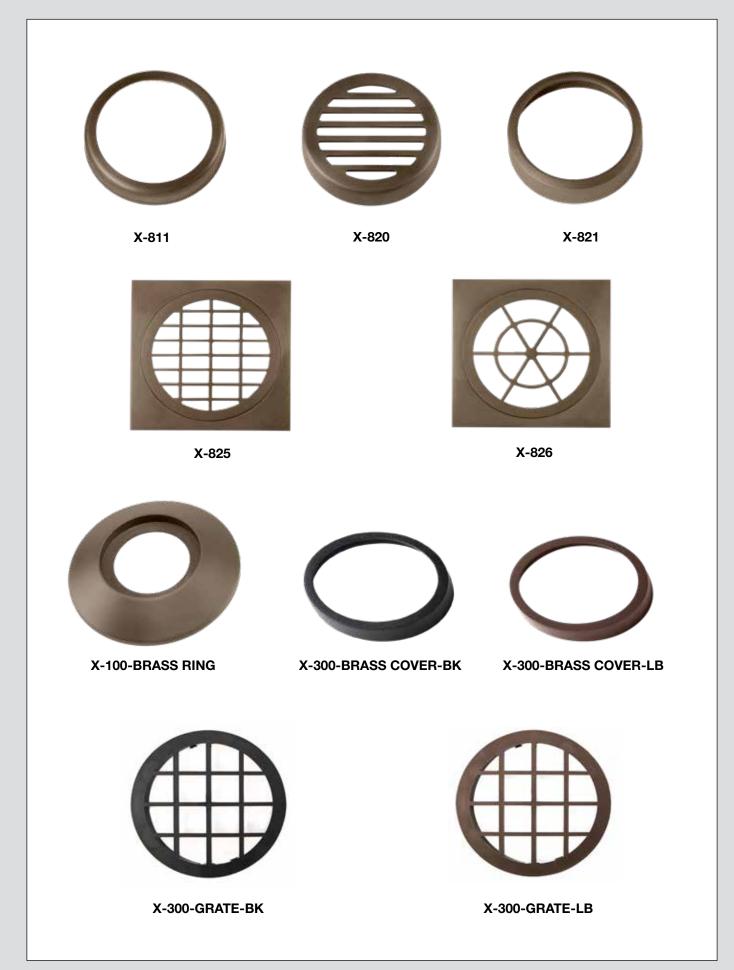



ACCESSORIES

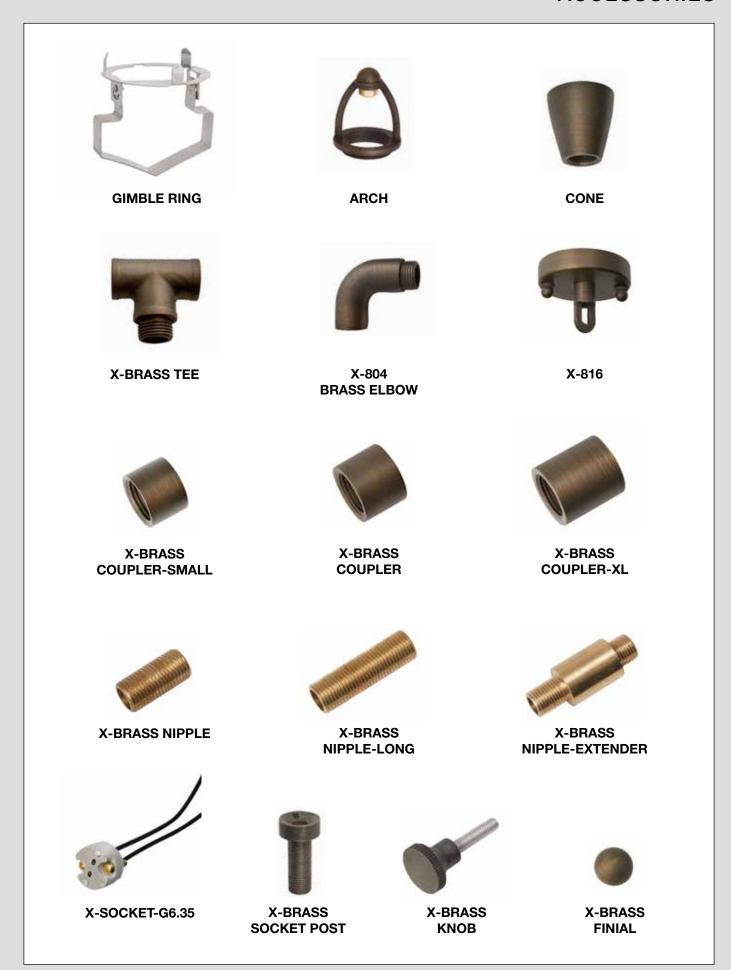

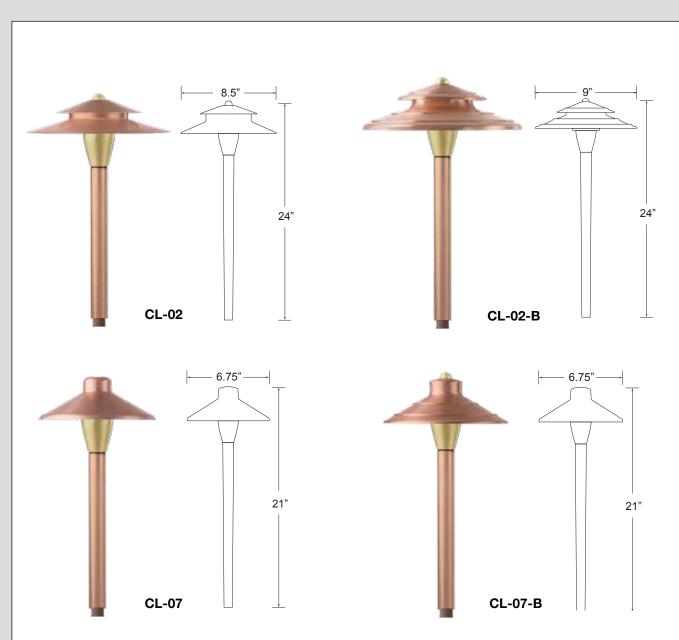


	CL-07 / CL-07-B 21" Light Spread: 8-10'		
HEIGHT	CL-02 / CL-02-B 24" Light Spread: 10-12'		
LENS	Clear and Frosted Glass Dome		
	Bluetooth RGBW LED		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin		
LED LAMP	3 Watt LED G4 Bi-Pin		
STAKE	X-801 Heavy Duty Ground Stake		
WIRE LEAD	25 Feet of 18-2 Wire		
FINISH	Copper		
CONSTRUCTION	Copper Shade with Solid Copper Post		
APPLICATION	Illuminating Pathways, Bed Areas and Driveways		

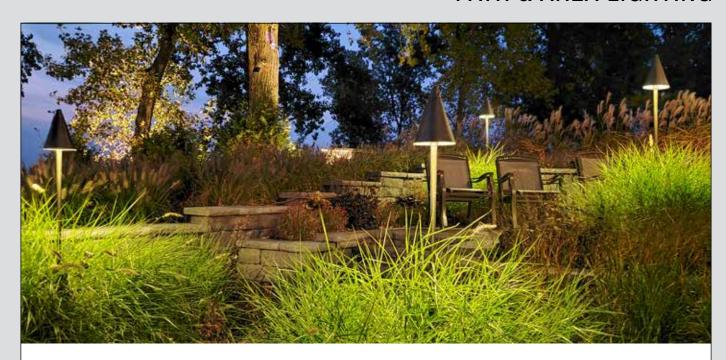

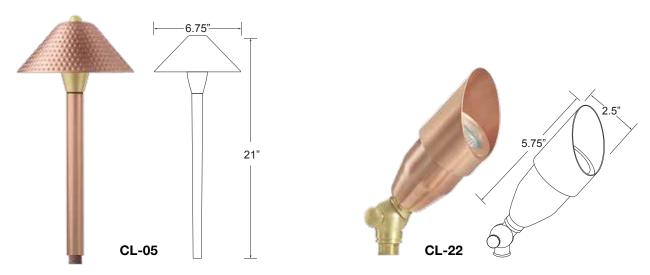


CL-05	Illuminating Pathways, Bed Areas and Driveways			
CL-22	Up Lighting of Trees, Walls, Homes			
Heavy Coppe	r and Brass			
Copper				
25 Feet of 18-	-2 Wire			
X-801 Heavy	X-801 Heavy Duty Ground Stake			
CL-05 3 Watt LED G4 Bi-Pin				
CL-05	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin			
	Bluetooth RGBW LED			
CL-05	Clear and Frosted Glass Dome			
CL-22	Clear Convex Lens			
CL-05 21"	Light Spread: 8-10'			
	CL-22 Heavy Copper Copper 25 Feet of 18: X-801 Heavy CL-05 CL-05 CL-05 CL-22			

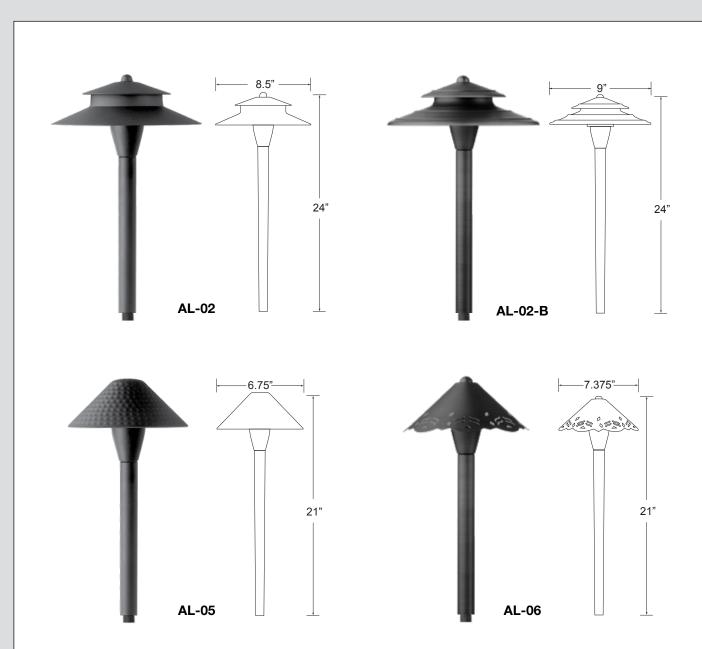

APPLICATION	Illuminating Pathways, Bed Areas and Driveways			
CONSTRUCTION	Die Cast Aluminum	n Shade a	and Post	
FINISH	Textured Back			
WIRE LEAD	25 Feet of 18-2 W	ire		
STAKE	X-801 Heavy Duty	Ground S	Stake	
LED LAMP	3 Watt LED G4 Bi-	Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Bluetooth RGBW LED			
LENS	Clear and Frosted	Glass Do	me	
HEIGHT	AL-02 / AL-02-B	24"	Light Spread: 10-12'	
	AL-05	21"	Light Spread: 8-10'	
	AL-06 21" Light Spread: 8-10'			



APPLICATION	Illuminating Pathways, Bed Areas and Driveways			
CONSTRUCTION	Die Cast Aluminum Shade and Post			
	AL-09	Glass Sha	de with Brass Frame	
FINISH	Textured Back			
WIRE LEAD	25 Feet of 18-2 Wire			
STAKE	X-801 Heavy Duty Ground Stake			
LED LAMP	3 Watt LED G4 B	i-Pin		
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Bluetooth RGBW LED			
LENS	Clear and Frosted Glass Dome			
HEIGHT	AL-07 / AL-07-B	3 21"	Light Spread: 8-10'	
	AL-09	24"	Light Spread: 10-12'	

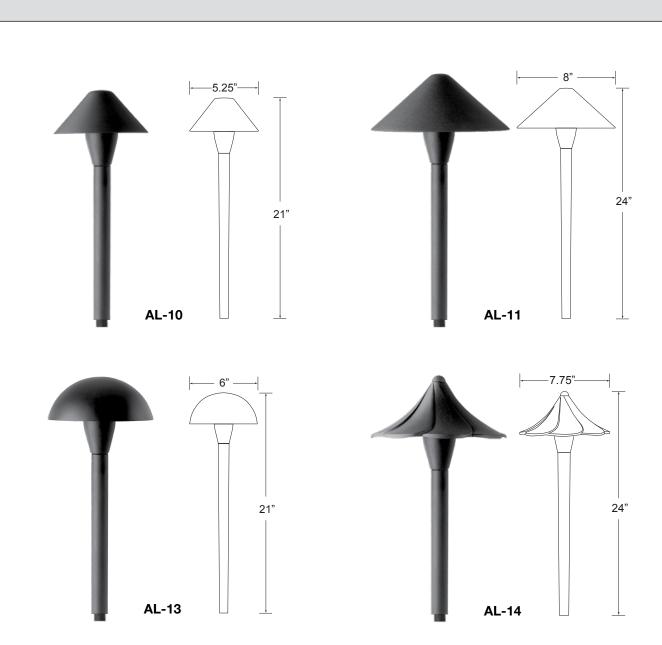

APPLICATION	Illuminating Pathways, Bed Areas and Driveways			
CONSTRUCTION	Die Cast Aluminum Shade and Post			
FINISH	Textured Back			
WIRE LEAD	25 Feet of 18-2 Wire			
STAKE	X-801 Heavy Duty Ground Stake			
LED LAMP	3 Watt LED G4 Bi-Pin			
LED LAMP OPTIONS	1 Watt, 2 Watt, 4 Watt LED G4 Bi-Pin Bluetooth RGBW LED			
LENS	Clear and Frosted Glass Dome			
HEIGHT	AL-10 / AL-13 21" Light Spread: 6-8'			
	AL-11 / AL-14 24" Light Spread: 8-10'			

PATH & AREA LIGHTING / BOLLARDS




BOL-07

BOL-06

BOL-05

APPLICATION	Illuminatin	Illuminating Pathways, Bed Areas and Driveways									
CONSTRUCTION	Aluminum	Aluminum									
FINISH	Black Pow	Black Powder Coat									
WIRE LEAD	25 Feet of	25 Feet of 18-2 Wire									
STAKE	X-801 Hea	X-801 Heavy Duty Ground Stake									
LED LAMP	4 Watt LEI	4 Watt LED MR16									
LED LAMP OPTIONS	1 Watt, 2 \ 3 Watt MF 6 Watt MF Bluetooth	88 or MR11 816 LED	· 								
HEIGHT	BOL-05	15"	Light Spread: 8-10'								
	BOL-06	25"	Light Spread: 10-12'								
	BOL-07	15"	Light Spread: 8-10'								
	BOL-08	25"	Light Spread: 10-12'								

BOL-08

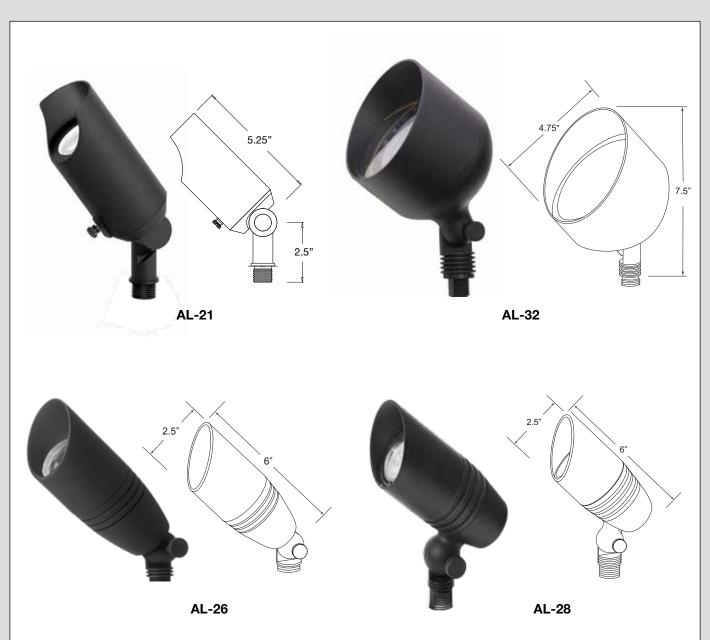

APPLICATION	Up or Down Lighting of Tr	Up or Down Lighting of Trees, Homes and Structures						
CONSTRUCTION	Die Cast Aluminum							
FINISH	Textured Black							
WIRE LEAD	25 Feet of 18-2 Wire							
STAKE	AL-21 / AL-26 / AL-28 AL-32	X-800 Heavy Duty Ground Stake X-801 Heavy Duty Ground Stake						
LED LAMP	AL-21 / AL-26 AL-28 AL-32	4 Watt or 6 Watt LED MR16 4 Watt, 6 Watt, or 9 Watt LED MR16 6 Watt, 10 Watt, 13 Watt, or 17 Watt PAR36						
LED LAMP OPTIONS	AL-28 / AL-32	Bluetooth RGBW LED						
LENS	Clear Glass							
OPTIONAL LENS	Frosted, Linear, Honeyco	mb. Moonlight Blue						

UP & DOWN WALL WASHER / FLOOD LIGHTING



APPLICATION	•	Jp or Down Lighting of Walls, Signs, Buildings, Homes, Vater Features and Structures								
CONSTRUCTION	Die Cast Alur	ie Cast Aluminum								
FINISH	Textured Blac	Fextured Black								
WIRE LEAD	25 Feet of 18	5 Feet of 18-2 Wire								
STAKE	AL-30	X-800 Heavy Duty Ground Stake								
	AL-31	X-801 Heavy Duty Ground Stake								
LED LAMP	AL-30	3 Watt LED Panel								
	AL-31	6 Watt LED Panel								
LED LAMP OPTIONS	AL-31	4 Watt or 6 Watt LED MR16								
	AL-30	3 Watt or 4 Watt G4 LED								
	AL-31	20 Watt Super Bright LED Panel								
	AL-31	AL-31 Bluetooth RGBW LED								
LENS	Clear, Frosted	d and Linear Glass								

TRANSFORMERS







TR-75SS-15



TR-300SS-15

TR-150SS-15



TR-600SS-22

Multi-Tap Transformers (WiFi Compatible)

Construction: 304 Stainless Steel

Taps: 12-15 Volt Transformers are 12, 13, 14, & 15

Taps: 12-22 Volt Transformers are 12, 13, 14, 15, 16, 17, 18, 20, & 22

Primary Protection: Automatic thermal reset breaker

Secondary Protection: 25 amp, 300 watt magnetic breaker with reset switch

Torodial Core: Epoxy sealed core which is silent and up to 10% more efficient, runs much cooler

than laminated cores

Terminal: Extra large 125 amp terminal blocks, holds (8) 12/2 wire

Internal Wiring: Non-corrosive, tin coated marine grade, dedicated current loop to measure primary amperage.

Timer Receptacle: Standard receptacle for plug and play options

Photo Cell Plug: Dedicated plug for easy installation of photo cell

Child Proof Safety: Lockable latched door to prevent access

Model	Volts	Wattage	Max Amps	Dimensions	Weight
TR-75SS-15	12, 15	75 watts	.625 amps	6 ½" L x 3 ¾" W x 4 ¼" D	8 lbs
TR-150SS-15	12, 13, 14, 15	150 watts	1.25 amps	11 ¾" L x 6" W x 5 ½" D	15 lbs
TR-300SS-15	12, 13, 14, 15	300 watts	2.5 amps	13" L x 6 ½" W x 6" D	18 lbs
TR-600SS-22	12, 13, 14, 15, 16, 18, 20, 22	600 watts	5.0 amps	16 ¼" L x 6" W x 5 ½" D	32 lbs

TRANSFORMER ACCESSORIES



X-TM



X-TM-DM



X-PC



X-WIFI SMART PLUG



X-PC-25



X-TM-ASTRO



X-DIMMER

LAMP GUIDE

art Number	Watts	Volts	Beam Spread	Base	Lumens/ CBCP	Color Temp	Rated Life (Hours)
A-LED-MR8-3W-2700	3	12	60°	G4 Bi-Pin	170	2700	40,000
A-LED-MR8-3W-3000	3	12	60°	G4 Bi-Pin	180	3000	40,000
A-LED-MR11-3W-2700	3	12	40°	G4 Bi-Pin	180	2700	40,000
A-LED-MR11-3W-3000	3	12	40°	G4 Bi-Pin	190	3000	40,000
A-LED-MR16-4W-2700-15	4	12	15°	GU5.3 Bi-Pin	390	2700	40,000
A-LED-MR16-4W-2700-30	4	12	30°	GU5.3 Bi-Pin	390	2700	40,000
A-LED-MR16-4W-2700-45	4	12	45°	GU5.3 Bi-Pin	390	2700	40,000
A-LED-MR16-4W-2700-60	4	12	60°	GU5.3 Bi-Pin	390	2700	40,000
A-LED-MR16-4W-2700-100	4	12	120°	GU5.3 Bi-Pin	390	2700	40,000
A-LED-MR16-4W-3000-15	4	12	15°	GU5.3 Bi-Pin	420	3000	40,000
A-LED-MR16-4W-3000-30	4	12	30°	GU5.3 Bi-Pin	420	3000	40,000
A-LED-MR16-4W-3000-45	4	12	45°	GU5.3 Bi-Pin	420	3000	40,000
A-LED-MR16-4W-3000-60	4	12	60°	GU5.3 Bi-Pin	420	3000	40,000
A-LED-MR16-4W-3000-100	4	12	120°	GU5.3 Bi-Pin	420	3000	40,000
A-LED-MR16-4W-5000-45	4	12	45°	GU5.3 Bi-Pin	470	5000	40,000
A-LED-MR16-4W-5000-60	4	12	60°	GU5.3 Bi-Pin	470	5000	40,000
A-LED-MR16-6W-2700-15	6	12	15°	GU5.3 Bi-Pin	650	2700	40,000
A-LED-MR16-6W-2700-30	6	12	30°	GU5.3 Bi-Pin	650	2700	40,000
A-LED-MR16-6W-2700-45	6	12	45°	GU5.3 Bi-Pin	650	2700	40,000
A-LED-MR16-6W-2700-60	6	12	60°	GU5.3 Bi-Pin	650	2700	40,000
A-LED-MR16-6W-2700-120	6	12	120°	GU5.3 Bi-Pin	650	2700	40,000
A-LED-MR16-6W-3000-15	6	12	15°	GU5.3 Bi-Pin	680	3000	40,000
A-LED-MR16-6W-3000-30	6	12	30°	GU5.3 Bi-Pin	680	3000	40,000
A-LED-MR16-6W-3000-45	6	12	45°	GU5.3 Bi-Pin	680	3000	40,000
A-LED-MR16-6W-3000-60	6	12	60°	GU5.3 Bi-Pin	680	3000	40,000
A-LED-MR16-6W-3000-120	6	12	120°	GU5.3 Bi-Pin	680	3000	40,000
A-LED-MR16-6W-5000-45	6	12	45°	GU5.3 Bi-Pin	720	5000	40,000
A-LED-MR16-6W-5000-60	6	12	60°	GU5.3 Bi-Pin	720	5000	40,000
A-LED-MR16-9W-2700-30	9	12	30°	GU5.3 Bi-Pin	720	2700	40,000
A-LED-MR16-9W-2700-45	9	12	45°	GU5.3 Bi-Pin	720	2700	40,000
A-LED-MR16-9W-2700-60	9	12	60°	GU5.3 Bi-Pin	720	2700	40,000
A-LED-MR16-9W-3000-30	9	12	30°	GU5.3 Bi-Pin	740	3000	40,000
A-LED-MR16-9W-3000-45	9	12	45°	GU5.3 Bi-Pin	740	3000	40,000
A-LED-MR16-9W-3000-60	9	12	60°	GU5.3 Bi-Pin	740	3000	40,000
A-LED-MR16-10W-RGBW-45	5 10	12	45°	GU5.3 Bi-Pin	Varies	RGBW	40,000









MR-8-3W

MR-11-3W

MR-16-4W

MR-16-6W








MR-16-9W

PAR-36

MR-16-RGBW-BT



Bluetooth

Lamp Type

Part Number	Watts	Volts	Beam Spread	Base	Lumens/ CBCP	Color Temp	Rated Life (Hours)
LA-LED-PAR36-6W-2700-40	6	12	40°	Screw Terminal	640	2700	40,000
LA-LED-PAR36-6W-3000-40	6	12	40°	Screw Terminal	660	3000	40,000
LA-LED-PAR36-6W-2700-60	6	12	60°	Screw Terminal	640	2700	40,000
LA-LED-PAR36-6W-3000-60	6	12	60°	Screw Terminal	660	3000	40,000
LA-LED-PAR36-6W-2700-120	6	12	120°	Screw Terminal	500	2700	40,000
LA-LED-PAR36-6W-3000-120	6	12	120°	Screw Terminal	520	3000	40,000
LA-LED-PAR36-10W-2700-40	10	12	40°	Screw Terminal	930	2700	40,000
LA-LED-PAR36-10W-3000-40	10	12	40°	Screw Terminal	950	3000	40,000
LA-LED-PAR36-10W-2700-60	10	12	60°	Screw Terminal	930	2700	40,000
LA-LED-PAR36-10W-3000-60	10	12	60°	Screw Terminal	950	3000	40,000
LA-LED-PAR36-10W-2700-120	10	12	120°	Screw Terminal	710	2700	40,000
LA-LED-PAR36-10W-3000-120	10	12	120°	Screw Terminal	730	3000	40,000
LA-LED-PAR36-13W-2700-40	13	12	40°	Screw Terminal	1050	2700	40,000
LA-LED-PAR36-13W-3000-40	13	12	40°	Screw Terminal	1150	3000	40,000
LA-LED-PAR36-13W-2700-60	13	12	60°	Screw Terminal	1050	2700	40,000
LA-LED-PAR36-13W-3000-60	13	12	60°	Screw Terminal	1150	3000	40,000
LA-LED-PAR36-13W-2700-120	13	12	120°	Screw Terminal	850	2700	40,000
LA-LED-PAR36-13W-3000-120	13	12	120°	Screw Terminal	870	3000	40,000
LA-LED-PAR36-17W-2700-40	17	12	40°	Screw Terminal	1350	2700	40,000
LA-LED-PAR36-17W-3000-40	17	12	40°	Screw Terminal	1450	3000	40,000
LA-LED-PAR36-17W-2700-60	17	12	60°	Screw Terminal	1350	2700	40,000
LA-LED-PAR36-17W-3000-60	17	12	60°	Screw Terminal	1450	3000	40,000
LA-LED-PAR36-17W-2700-120	17	12	120°	Screw Terminal	980	2700	40,000
LA-LED-PAR36-17W-3000-120	17	12	120°	Screw Terminal	1100	3000	40,000
LA-LED-PAR36-10W-RGBW-40	12	12	40°	Screw Terminal	Varies	RGBW	40,000

LAMP GUIDE



Lamp Type	Part Number	Watts	Volts	Beam Spread	Base	Lumens/ CBCP	Color Temp	Rated Life (Hours)
LED T3	LA-LED-T3-25-1W-3000	1	12	_	G4 Bi-Pin	90	3000	40,000
	LA-LED-T3-13-2W-2700	2	12	_	G4 Bi-Pin	170	2700	40,000
	LA-LED-T3-13-2W-3000	2	12	_	G4 Bi-Pin	180	3000	40,000
	LA-LED-T3-18-3W-2700	3	12	_	G4 Bi-Pin	220	2700	40,000
	LA-LED-T3-18-3W-3000	3	12	_	G4 Bi-Pin	240	3000	40,000
	LA-LED-T3-27-4W-2700	4	12	_	G4 Bi-Pin	340	2700	40,000
	LA-LED-T3-27-4W-3000	4	12	_	G4 Bi-Pin	360	3000	40,000
	LA-LED-T4-48-2W-3000	2	12	_	G4 Bi-Pin	190	3000	40,000
	LA-LED-T4-72-3W-3000	3	12	_	G4 Bi-Pin	250	3000	40,000
	LA-LED-COB-3W-2700	3	12	_	G4 Bi-Pin	240	2700	40,000
	LA-LED-COB-3W-3000	3	12	_	G4 Bi-Pin	260	3000	40,000
LED BA-15	LA-LED-BA-15S-3W-3000	3	12	_	Single Bayonet	240	3000	40,000
	LA-LED-BA-15D-3W-3000	3	12	_	Double Bayonet	240	3000	40,000



Lamp Type	Part Number	Watts	Volts	Beam Spread	Base	Lumens/ CBCP	Color Temp	Rated Life (Hours)
	LA-LED-CA-2W-2700-12V	2	12	-	Candelabra	210	2700	40,000
	LA-LED-A19-2W-2700-12V	2	12	_	Medium Base	260	2700	40,000
	LA-LED-A19-4W-2700-12V	4	12	-	Medium Base	300	2700	40,000
	LA-LED-A19-6W-2700-12V	6	12	-	Medium Base	380	2700	40,000
LED BL-30	LA-LED-BL-30-3W-3000	3	12	-	G4 Bi-Pin	260	3000	40,000
LED BL-31	LA-LED-BL-31-6W-3000	6	12	-	G4 Bi-Pin	470	3000	40,000
LED BL-31	LA-LED-BL-31-20W	20	12	-	G4 Bi-Pin	2200	3000	40,000
LED BL-31	LA-LED-BL-31-RGBW-BT	10	12	-	G4 Bi-Pin	Varies	RGBW	40,000
LED SD-500	LA-LED-SD-500-3W-3000	3	12	-	Crimp	220	3000	40,000
LED SD-501	LA-LED-SD-501-2W-3000	2	12	-	Crimp	160	3000	40,000
LED SD-505	LA-LED-SD-505-3W-3000	3	12	-	Crimp	240	3000	40,000
LED SD-506	LA-LED-SD-506-1W-2700	1	12	-	Crimp	160	2700	40,000
LED SD-506	LA-LED-SD-506-1W-3000	1	12	-	Crimp	180	3000	40,000
LED SD-506	LA-LED-SD-506-2W-2700	2	12	-	Crimp	220	2700	40,000
LED SD-506	LA-LED-SD-506-2W-3000	2	12	-	Crimp	240	3000	40,000

LAMP GUIDE



<i>Lamp Туре</i>	Part Number	Watts	Volts	Beam Spread	Base	Lumens/ CBCP	Color Temp	Rated Life (Hours)
LED SD-410	LA-LED-SD-410-1W-3000	1	12	-	Crimp	180	3000	40,000
LED SD-413	LA-LED-SD-413-2W-3000	2	12	-	Crimp	240	3000	40,000
LED SD-400	LA-LED-SD-400-2W-3000	2	12	-	Crimp	280	3000	40,000
LED SD-403	LA-LED-SD-403-3W-3000	3	12	-	Crimp	320	3000	40,000
LED SD-60	LA-LED-SD-60-3W-3000	3	12	-	Crimp	300	3000	40,000
MODULE	LA-LED-PATHLIGHT-MODULE	4	12	-	Crimp	220	3000	40,000
REPEATER X-REPEATER-BT Bluetooth Signal Booster								

KELVIN CHART / POWDER COAT FINISHES



8000 Daylight Metal Halide 5500 K 7500 7000 Cool White Fluoresent 4200 K 6500 Std. Clear Metal Halide 6000 4000 K 5500 5000 Warm (3K) Metal Halide 3200 K 4500 4000 Halogen 3000 K 3500 3000 Standard Incandescent 2700 K 2500 2000 High Pressure Sodium 1500

Optional Finishes



- Custom color matching is available
- Additional RAL colors are available using the standard RAL
- · Actual finishes may differ slightly than as shown above
- Choosing any color other than the standard finish will result in an up-charge per fixture



Encore Landscape Lighting warrants to the owner, each new lighting product against defects in material and workmanship for a period described below. During the warranty period, Encore Landscape Lighting will repair or replace, at our discretion, any part found to be defective. Your remedy is limited solely to the replacement or repair of defective parts.

This warranty does not apply to products, including lamps, not manufactured by Encore Landscape Lighting when used in conjunction with Encore Landscape Lighting products; or where equipment is used, or installation is performed in any manner contrary to Encore Landscape Lighting's specifications or instructions, nor where equipment is altered or modified. Encore Landscape Lighting assumes no responsibility for the improper installation of its products.

Encore Landscape Lighting is not liable for indirect, incidental or consequential damages in connection with the use of equipment, including but not limited to: vegetation loss, the cost of substitute equipment or services required during malfunction, property damage or personal injury resulting from installers actions, whether negligent or otherwise.

All implied warranties, including those of merchantability and fitness of use, are limited to the duration of this express warranty. All transformers, ABS well lights, brass and copper fixtures are covered by this warranty for the life of the original installation. All aluminum Encore Landscape Lighting fixtures are covered by this warranty for a period of three years from the date of installation. The warranty does not extend to color fading by UV rays or exposure to harsh chemicals or harsh environments including salt water environments. This warranty is non-transferable. Underwater fixtures have a warranty of one year. This warranty does not include the replacement of any lamps with the expectation of the LED lamps as listed below.

LED lamps have a warranty of three years from the date of purchase. The LED lamps must be installed at the correct voltage. Any LED lamp that is installed at an excessive voltage will void the warranty. The LED Lamps must be installed in conjunction with an Encore Landscape Lighting transformer or an approved transformer by Encore Landscape Lighting. The transformer must be a magnetic type. The use of Encore Landscape Lighting's LED lamps without a magnetic type of transformer or at voltages higher than the preferred specs will void the warranty.

In order to have a valid warranty, a registration form must be completed and submitted back to Encore Landscape Lighting within 30 days of purchase. The warranty registration form can be found on our website at www.encorelandscapelighting.com. The warranty form must be fully completed.

A product is covered during the warranty period if it is returned to Encore Landscape Lighting, freight prepaid. Our factory will inspect the product to determine if it is defective under the terms of the warranty. All products must have an RGA form (return goods authorization) completed by the customer and sent to Encore Landscape Lighting for approval. Once approved, a RGA number will be issued. No returns will be accepted without the RGA number. Encore Landscape Lighting does not compensate for any labor, diagnosis, repair, replacement, shipping fees or transportation.