


## Installation Guide




## Prinsu Wind Deflector Decals

**THANK YOU** for purchasing this Prinsu product. Please read through this entire document before proceeding with installation. If you are not confident in your mechanical skills, please seek the help of a professional to perform the installation. Check your packages immediately upon arrival to ensure that everything listed is included, and to check for damage during shipping. **If anything is missing or damaged, or if you need technical assistance with any aspect of this installation, call Prinsu at (208) 528-0664 as soon as possible.**

PRINSU will warranty all PRINSU manufactured parts for a LIFETIME of use. This limited Lifetime Warranty is effective for as long as the original retail purchaser owns the product. This warranty terminates when the original retail purchaser sells or otherwise transfers the product to any other person. Each manufactured product must be installed following PRINSU'S recommended fitment and installation procedures. Any customization or modification to the original product design, functionality, or use, either by said customer or by PRINSU voids all warranty eligibility. It is the sole discretion of PRINSU to determine warranty eligibility. Subject to the limitations and exclusions described in this warranty, PRINSU will remedy defects in materials or workmanship by repairing or replacing, at its option, a defective product without charge for parts. In addition, PRINSU may elect, at its option, not to repair or replace a defective product but rather issue to a purchaser a refund equal to the purchase price paid for the product or a credit to be used toward the purchase of a new PRINSU product. No warranty is given for defects caused by normal wear and tear, cosmetic rust scratches, accidents, unlawful vehicle operation, products used for racing or competition, or modification of, or any types of repair of, a PRINSU manufactured product. The PRINSU Warranty does not include the powder coated finish. No warranty is given for defects resulting from conditions beyond PRINSU'S control including, but not limited to, misuse, neglect, overloading, improperly maintained or failure to assemble, mount or use the product in accordance with PRINSU'S written instructions or guidelines included with the product or implied use made available to the purchaser. Disclaimer of liability repair or replacement of a defective product or the issuance of a refund or credit (as determined by Prinsu) is a purchaser's exclusive remedy under this warranty. Damage to a purchaser's vehicle, cargo and/or to any other person or property is excluded. This warranty is expressly made in lieu of any and all other warranties, express or implied, including the warranties of merchantability and fitness for a particular purpose. Prinsu's sole liability to any purchaser is limited to the remedy set forth above. In no event will Prinsu be liable for any lost profits, lost sales, or for any consequential, direct, indirect, incidental, special, exemplary, or punitive damages or for any other damages of any kind or nature




If the wind deflector is installed, remove it from your vehicle and the crossbar behind it.

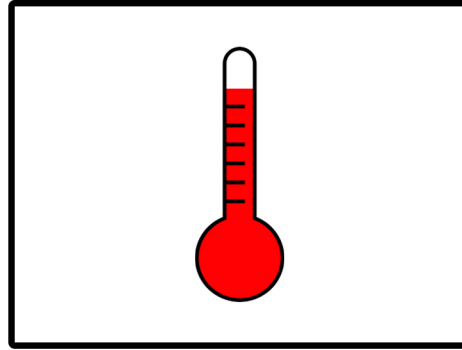

Allow the wind deflector to reach room temperature for proper adhesion to occur.



Clean the surface of the wind deflector to remove any dust and contaminants. Rubbing alcohol or any cleaner that doesn't leave residue behind can be used.

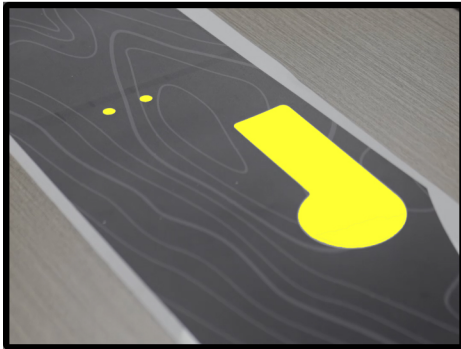

The areas highlighted in yellow will need to be removed from the decal first.



Peel back the decal.




Line up the first set of holes and lightly press down only in the immediate area surrounding and inbetween the holes.



Repeat the previous steps for the rest of the holes.



With all the holes aligned begin pressing the rest of the decal down starting from the center and working outwards towards the edges to clear any bubbles.

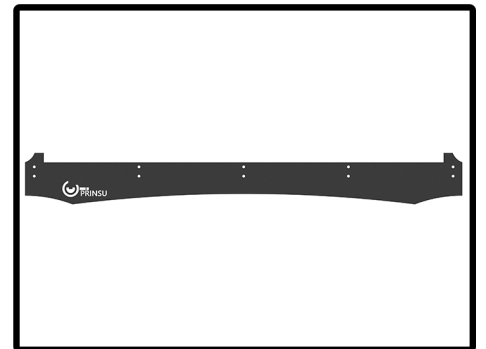

If you have a wind deflector with a cutout for a light bar, the decal will need to be trimmed.



To trim out the area for the light bar cutout use the supplied knife. Begin from the top and cut down to the edge of the light bar cutout. Do this on both sides of the wind deflector.



Run the knife across the cutout to finish removing it.



Installation is now complete. As a pro tip a hair dryer can be used to further add heat and increase the adhesion of the decal, use caution to not overheat and warp the decal.