



Material x Application recommendation goods table

Application		Material			Steel			Stainless			Aluminum			Others		
重研削 Heavy Grinding	GreenZ	ZG	Q	GreenZ	ZG	P				GreenZ (Cast Iron)	ZG	Q				
		Seven Ace	—	—	Seven Ace	—	—	Alumi 13	—	—	Super Green Sigma (Cast Iron)	—	—			
研削 Grinding	Super Green Sigma	—	—	Super Green Sigma	—	—										
		Super Green	—	—	Super Green	—	—									
バリ取り Deburring	Super Green Sigma	—	—	Super Green Sigma	—	—	Super Green	—	—	GreenZ (Cast Iron)	ZG	Q				
		Super Green	—	—												
面取り Beveling	Super Green	—	—	Super Green	—	—	Fine Touch	C	—	Fine Touch (Glass)	GC	—				
		Cloth In Wheel	—	—	Good Wheel	GZ	—	Good Wheel	GZ	—						
					Cloth In Wheel	—	—	Cotton Pointer	A	Soft						
軽研削・研磨 Polishing	Super Green	—	—	Super Green	—	—	Fine Touch	C	—	Super Green (Cast Iron)	—	—				
		Good Wheel	GZ	—	Good Wheel	GZ	—	Sand Wheel	—	—	Fine Touch (Glass)	GC	—			
		Sand Wheel	—	—	Sand Wheel	—	—	Free Sand	—	—	Free Sand (FRP,Wood)	—	—			
		Free Sand	—	—	Free Sand	—	—									
仕上研削 Finish Grinding	Good Wheel	GZ	—	Fine Touch	WA	—	Fine Touch	C	—	Fine Touch (Glass)	GC	—				
		Free Sand	—	—	Cloth In Wheel	A	—	Sand Wheel	—	—						
					Sand Wheel	—	—	Free Sand	—	—						
塗装はがし Paint Removing	Sand Wheel	—	—							Sand Wheel (Cast Iron,FRP)	—	—				
		Free Sand	—	—							Free Sand (Cast Iron,FRP)	—	—			
切断 Cutoff	Thin Sheet	Thickness < 2mm	Theta Cut EX	NX	S	Theta Cut EX	NX	S			Sand Wheel C80 (FRP)	C	—			
		Thickness > 2mm	Cutting Wheel	NX	S	Cutting Wheel	NX	S			Sand Wheel C80 (FRP)	C	—			
	Round Bar	Diameter < 10mm	Theta Cut EX	NX	S	Theta Cut EX	NX	S								
		Diameter > 10mm	Cutting Wheel	NX	S	Cutting Wheel	NX	S			Cutting Wheel (Cast Iron)	NX	S			
	Angle & Channel	Jaan Cut	—	P	Jaan Cut	—	M			Jaan Cut (Cast Iron)	—	M				
Jaan Cut	—	P	Jaan Cut	—	M				Jaan Cut (Cast Iron)	—	M					

Grit Selection

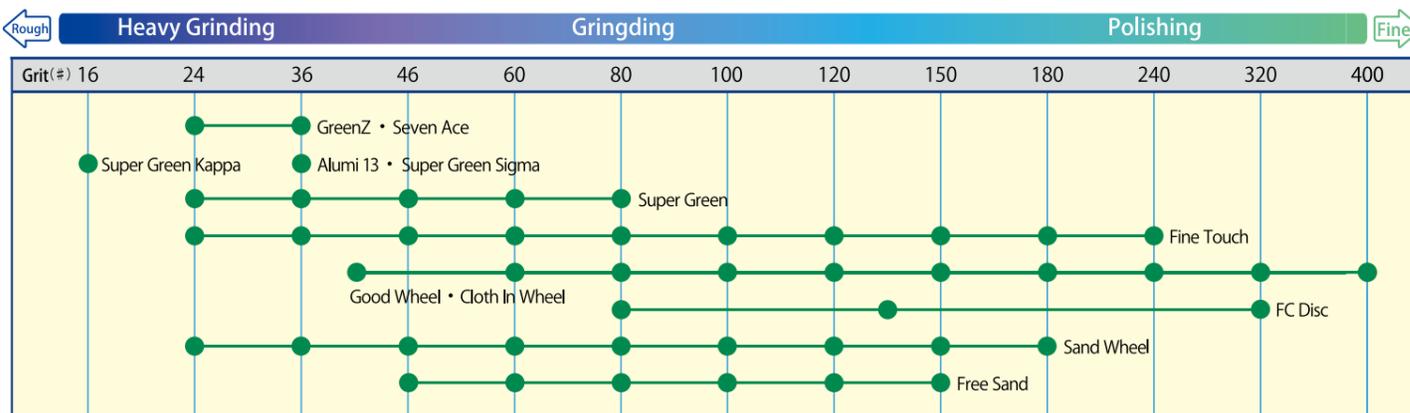

NEW REGISTON PRODUCTS CATALOG

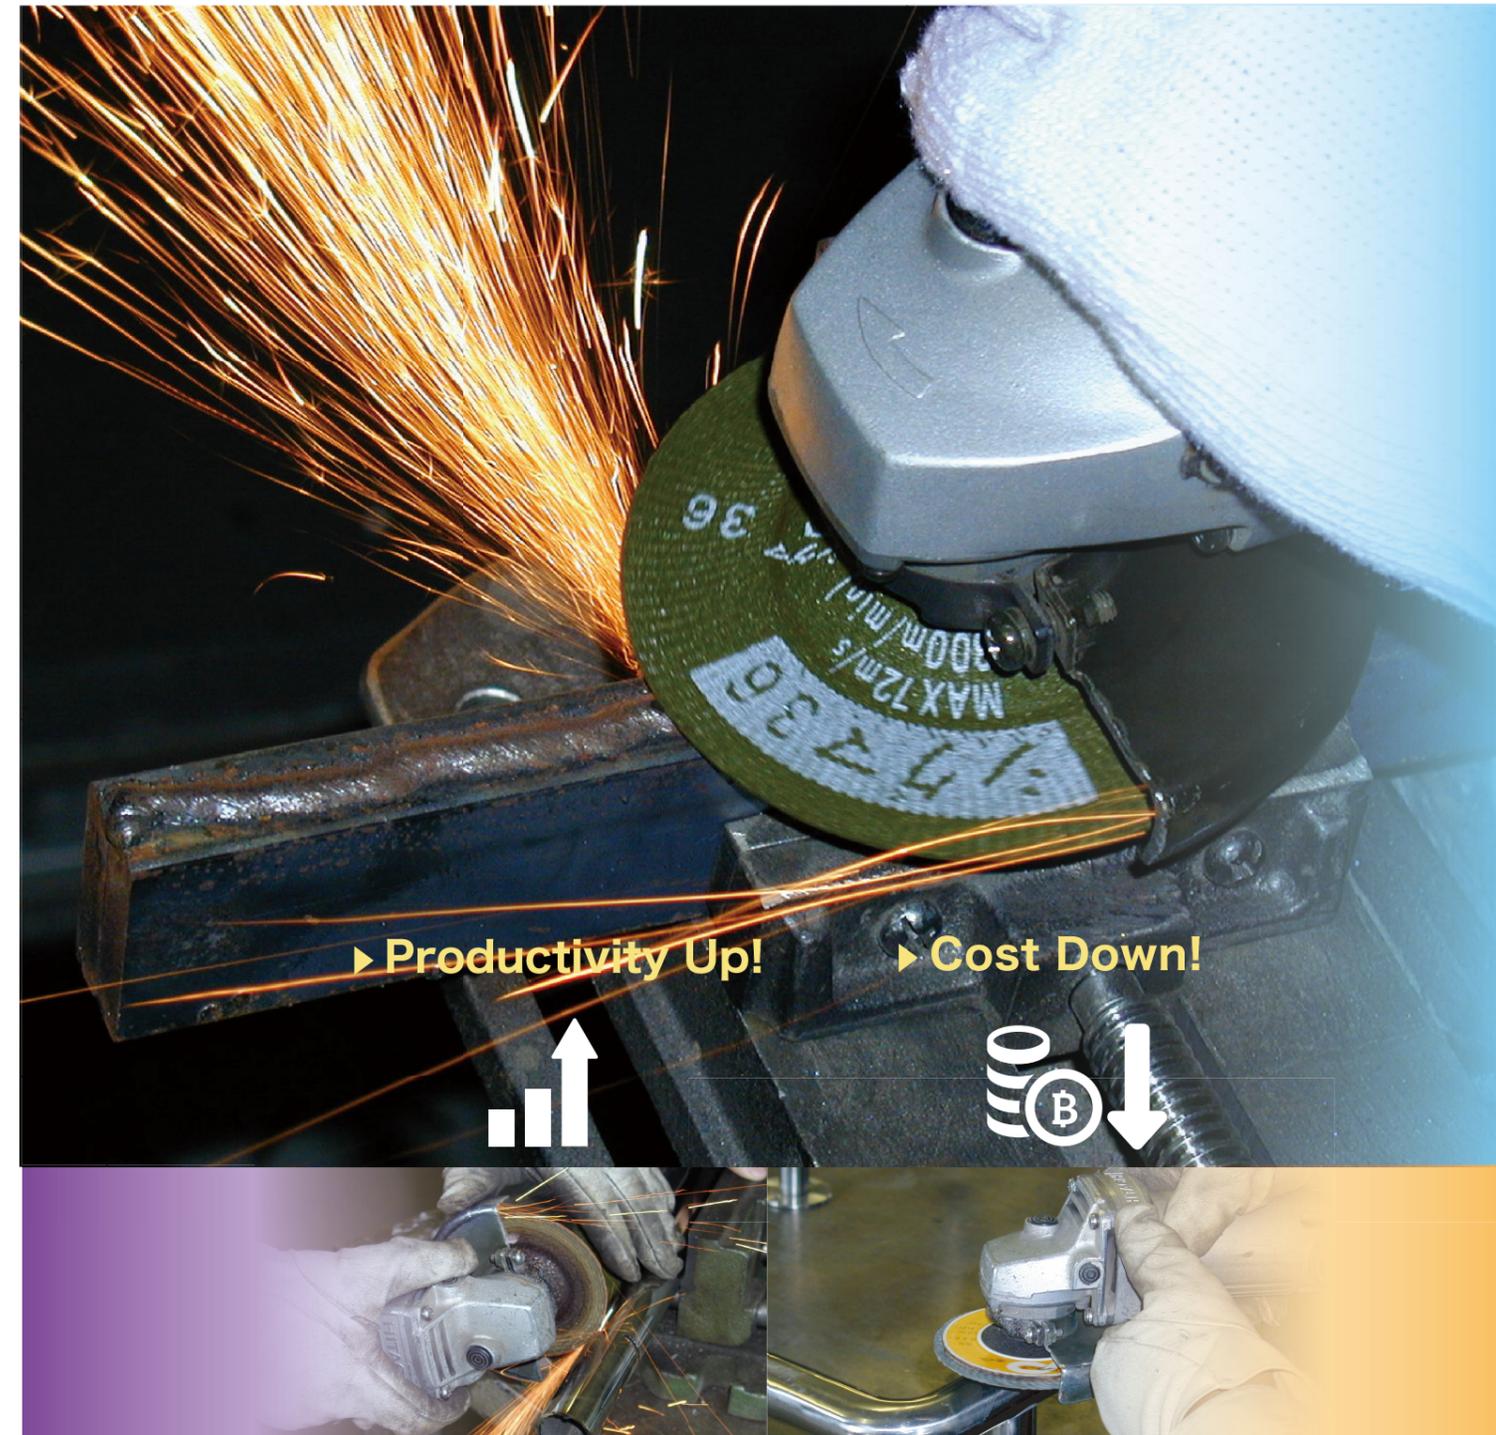

NRS
NEW REGISTON

2-1-1 AYUMINO IZUMI-CITY OSAKA 594-1157 JAPAN
HOME PAGE <http://www.newregiston.co.jp/en/>



Issued on March,2021 No.181001-A5-3

Scan the Streaming Movie!
Choose Your Future



■Theta Cut EX
High stock removal and excellent cutting speed.



Thickness:1mm
Bore:16mm

■Cutting Wheel Center Depressed type
For long lasting durability.



Thickness:2.3mm,2.6mm,3mm
Bore:16mm,22mm



Cutting
切

■Jaen Cut
Special surface of wheel provides high stock removal.



Thickness:3mm,3.5mm,4.5mm
Bore:25.4mm
Grit:36
Hardness:M,P

■Sand Wheel C80 Center Depressed type
Ideal for precision cutting FRP.



Thickness:2mm
Bore:16mm

■Air mini grinder Kujin

Size:58×3.5×9.53mm
75×4×9.53mm
Body mass :0.54kg Throttle type
0.59kg Lever type

Use pressure:0.6MPa(6kgf/cm²)
Air consumption:0.54m³/min
No load speed of revolutions:12,000min⁻¹



Throttle type
Product No. GR-M58(75)KS



Lever type
Product No. GR-M58(75)KL

■Mini Super Green


Designed for in the narrow space grinding.



58φ
75φ
Thickness 58φ :3.5mm
75φ :4mm
Bore :9.53mm
Grit :36,46,60,80

■Mini Blue Cerac

Grinding power is increased with ceramic grain.



NEW
58φ
75φ
Grit:36

■Mini P Wheel

Ideal for sanding and polishing.



58φ
75φ
Bore 58φ :9.53mm
75φ :10mm
Grit :A40,60,80,100,
120,150,180,240

■Mini Quick Paper

Designed for surface and curve grinding.



Use with a MiniQuickPad
50φ
75φ
Grit :A40,60,80,120,
180,240,320,400
Z36,60,80,120

■Mini R Wheel

Designed for curve polishing.



58φ
75φ
Bore :10mm
Grit :A80,100,120

■Mini Quick FC

Designed for moderate stock removal.



Use with a MiniQuickPad
50φ
75φ
Grit:120,240,320,600

■Theta Mini

Ideal for cutting in narrow space.




58φ
75φ
Bore :9.53mm

■Mini Quick Pad

Backup pad for Mini Quick Series.



•For 50φ
•For 75φ

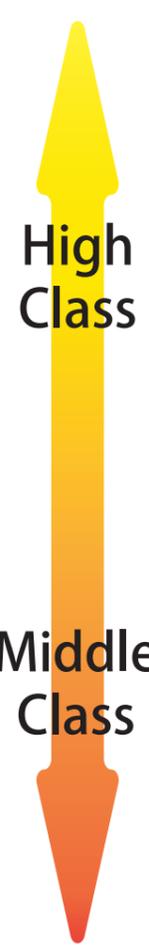

High Class

Middle Class

■Green Z

Ideal for grinding steel, stainless steel, cast iron and high-tensile steel. Provides high stock removal.




100φ
125φ
150φ
180φ
205φ
180 High

Thickness:6mm
Bore:16mm,22mm
Grain:ZG Grit:24,36
Hardness:N,P,Q,S

■Super Green

For grinding steel and stainless steel. No backup pad required.

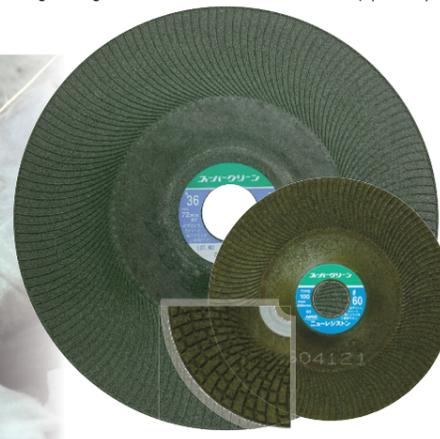

100φ
125φ
180φ

Thickness:3mm,5mm
Bore:16mm,22mm
Grit:24,36,46,60,80

■Seven Ace

General purpose grindingwheel for economy type.



100φ
125φ
150φ
180φ
205φ
180 High

Thickness:6mm
Bore:16mm,22mm
Grain:A/WA,ST
Grit:24,36
Hardness:K,L,M,N,P,Q

■Fine Touch

Standard flexible wheel. (Use with a Backup Pad)



100φ
125φ
150φ
180φ

Thickness:2mm,3mm
Bore:16mm,22mm
Grain:AC,WA,WAN,
WAH,C,GC
Grit:24,36,46,60,80,100,
120,150,180,240

Ace

Flexible

■FC Disc

Designed for moderate stock removal and smooth finish on the surface.



100φ
Grit:80,120,320
(Use with a Backup Pad)

■Sand Wheel

Minimized sticking and clogging. Ideal for sanding steel, stainless steel, aluminum and FRP. (Use with a Backup Pad)



100φ
125φ
150φ
180φ
Grit:24,36,46,60,
80,100,120,
150,180
Bore:16mm,22mm

■Free Sand

Stack 2 to 5 discs as needed. Ideal for sanding steel, stainless steel, aluminum and FRP. (Use with a Backup Pad)



100φ
Grit:46,60,80,
120,150
Bore:16mm

■Cloth in wheel

Absorbing vibration by our original base brings smooth and fine finish.



100φ
Grit
A :40,60,80,100,
120,150,180,
240,320,400
BZ :40,60,80,
Bore:16mm



Sanding
磨