




b•hyve™ FLOOD SENSOR

Welcome to B-hyve™

Water intrusion in the home causes extensive damage unless it is caught right away. The B-hyve™ Flood Sensor offers peace of mind and protection by alerting your phone immediately when a leak in your home is detected.

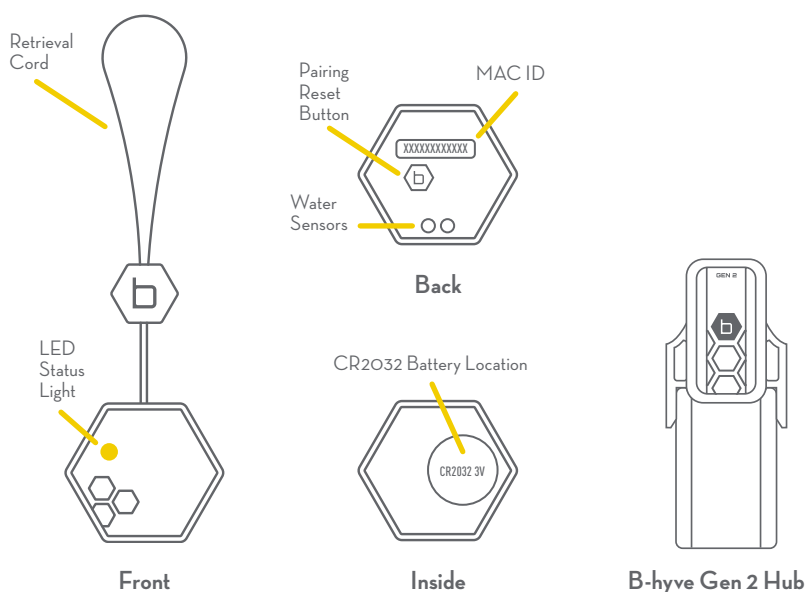

1) Open the B-hyve™ App

Log into your B-hyve account and tap “My B-hyve”. Go to “devices” then “add device”. The app will walk you through the rest of the process.

i For new users, search apps for “B-hyve” and download the free Android or iOS app. Create an account to begin setup.



2) Power and Pair Gen 2 Hub

Plug the hub into an indoor outlet, central to sensor locations, and within range of Wi-Fi. Press button five times to reset the hub and enter into pairing mode. Your hub will flash red, then blue to signify it is in pairing mode.


3) Power and Pair Sensor

Remove the pull tab to activate the battery, your sensor is now in pairing mode.

i If at any time you need to re-pair, quickly press the on the back of the sensor 5 times.



Sensors include one Lithium CR2032 battery. Annual battery replacement is recommended for optimal performance. See the “Replacing the Battery” section for instructions.



4) Select Sensor Location


Place the sensor in an indoor location within range of your hub. Range is approximately 150 ft. (45m), walls and other interference can reduce this range. Position the retrieval cord for easy extraction when placing a sensor beneath heavy objects.

If using as a water sensor:

- Place the sensor flat on the floor in the area you wish to monitor.
- Ensure that the flood sensor is positioned with its flat surface faced down.

If using as a heat/cold sensor:

- Place in the location where you wish to detect changes in temperatures.
- Avoid areas where inconsistent temperatures are common. (near vents, exhausts, etc.)



i The sensor communicates with the hub via Bluetooth™; the range between the sensor and hub will vary depending on the number of walls and types of obstacles the signal needs to travel through.

i If water is detected or there is a temperature fluctuation, a beep will play and a notification will be displayed on your phone.

i Avoid areas where the signal must travel through dirt or thick steel barriers.

5) Complete Setup

Continue to follow the instruction within the app to complete the setup process.

Replacing the Battery

- Insert a flathead screwdriver into the open slot.
- Turn the screwdriver 90° to snap open the cover.
- **To remove the battery, lift on the edge of the coin cell battery using your fingers. DO NOT use a screwdriver or other metal object.**
- Insert a new CR2032 battery at an angle.
- Verify that the + side is up.
- Reinstall the battery cover by snapping it into place.



Always completely secure the battery compartment. If the battery compartment does not close securely, stop using the product, remove the batteries, and keep it away from children.

If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention. Even used cells may cause injury.

i **CAUTION:** Dispose of used batteries according to the battery manufacturer’s instructions.



! WARNING: Risk of Fire, Explosion, and Electric Shock. Replace battery with CR2032 only. Use of a different battery has the potential for a risk of fire, explosion, and electric shock.

! WARNING: Do not ingest batteries. Chemical Burn Hazard. Keep batteries away from children.

! WARNING: This product contains a lithium button/coin cell battery.

! WARNING: If a new or used lithium button/coin cell battery is swallowed or enters the body, it can cause severe internal burns and can lead to death in as little as 2 hours.

Specifications

Sensor

HVIN: FS1

Part No - 71003, 71000, 04133

FCC ID:ML6FS1

IC:3330A-FS1

RATING: DC 3.3V

Battery: CR 2032 Lithium (Non-Rechargeable)

Temp Range: 32-158°F (0-70°C)

Hub

HVIN: BH1G2

Part No - 21008

FCC ID:ML6-BH1G2

IC:3330A-BH1G2

Range: 150 ft. (45m) without interference

Temperature Operating Range: 32°F-104°F (0-40°C)

Storage Temperature: -4°F to 140°F (-20 °C to 60 °C)

Humidity Operating Range: 0-90%

Input: 100-240V ~ 50/60Hz 0.2A

Output: 5V-1.0A

Limited Warranty

Limited Orbit Irrigation Products LLC., (hereinafter Orbit) warrants this product will be free from defects in material and workmanship for a period of one year from the date of purchase. Proof of Purchase (copy of your original receipt, purchase order or invoice), the date the product was purchased and installation date is required. During the warranty period, Orbit, will replace, free of charge, the part or parts found to be defective under reasonable use and service, as determined solely by Orbit. Orbit reserves the right to inspect the defective part prior to replacement. Liability under this warranty is limited to the replacement or repair of defective parts. This warranty is exclusive and is in lieu of all other warranties expressed or implied, including, but not limited to warranties for fitness, for use or merchantability.

FCC and IC Statement

This device complies with Part 15 of the FCC Rules and Industry Canada license exempt RSS standards. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Warning: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device meets the FCC and IC requirements for RF exposure in public or controlled environments. The end user is advised to maintain a distance of 20 cm from the controller and any personnel to ensure compliance with RF exposure regulations. This Class B digital apparatus complies with Canadian ICES-003.

Déclaration de FCC et l'IC

Cet appareil est conforme à la section 15 de la Règlementation de la FCC et la norme RSS d'Industry Canada. Son fonctionnement est soumis aux deux conditions suivantes: (1) cet appareil ne doit pas causer d'interférences nuisibles, et (2) cet appareil doit tolérer toutes les interférences, dont les interférences pouvant causer un fonctionnement non désiré.

Cet appareil numérique de classe B est conforme à la norme canadienne ICES-003.

Remarque: cet appareil été testé et déclaré conforme aux limites d'exposition pour les appareils numériques de classe B, selon la section 15 de la Règlementation de la FCC. Ces limites sont conçus pour fournir une protection raisonnable contre les interférences nuisibles dans une installation résidentielle. Cet appareil produit, utilise et peut émettre de l'énergie radio fréquence et, si elle n'est pas installée et utilisée conformément aux instructions, peut causer des interférences nuisibles aux communications radio. Cependant, il n'est pas garantie que des interférences ne se produisent pas dans une installation particulière.

Si cet appareil cause des interférences gênantes à la réception d'un signal radio ou de télévision, ce qui peut être déterminé en allumant et en éteignant l'appareil, l'utilisateur peut corriger les interférences en suivants une des mesures suivantes :


- Réorientez ou repositionnez l'antenne de réception.
- Augmentez la distance entre l'appareil et le récepteur.
- Branchez l'appareil dans une prise sur un circuit différent du circuit sur lequel le récepteur est branché.
- Consulter le revendeur ou un technicien radio/TV expérimenté pour obtenir de l'aide.

Cet appareil est conforme aux exigences de la FCC et de l'IC concernant l'exposition aux ondes dans un environnement public ou contrôlé. Il est conseillé à l'utilisateur final de maintenir une distance de 20 cm du contrôleur pour assurer la conformité aux réglementations d'exposition RF. Information de conformité pour le Canada.

Need Help?

If you encounter a problem, please use the following resources before returning your B-hyve to the store.

Scan the QR Code for access to the Orbit online help center.



call us

1-800-488-6156



text us

801-797-2319

or visit us at:



community.orbitonline.com



Orbit®

PO Box 328

Bountiful, UT 84011-0328 USA