


5,000lb x1lb
10,000lb x2lb



- NTEP Approved Class III
- 4 x 4 ft or 5 x 5 ft Alloy Steel Platform
- Bi-Directional RS232 Interface
- Easy to read Backlit LED Display
- Net/Gross, Pre-Tare, Animal Hold
- Reads in lb or kg



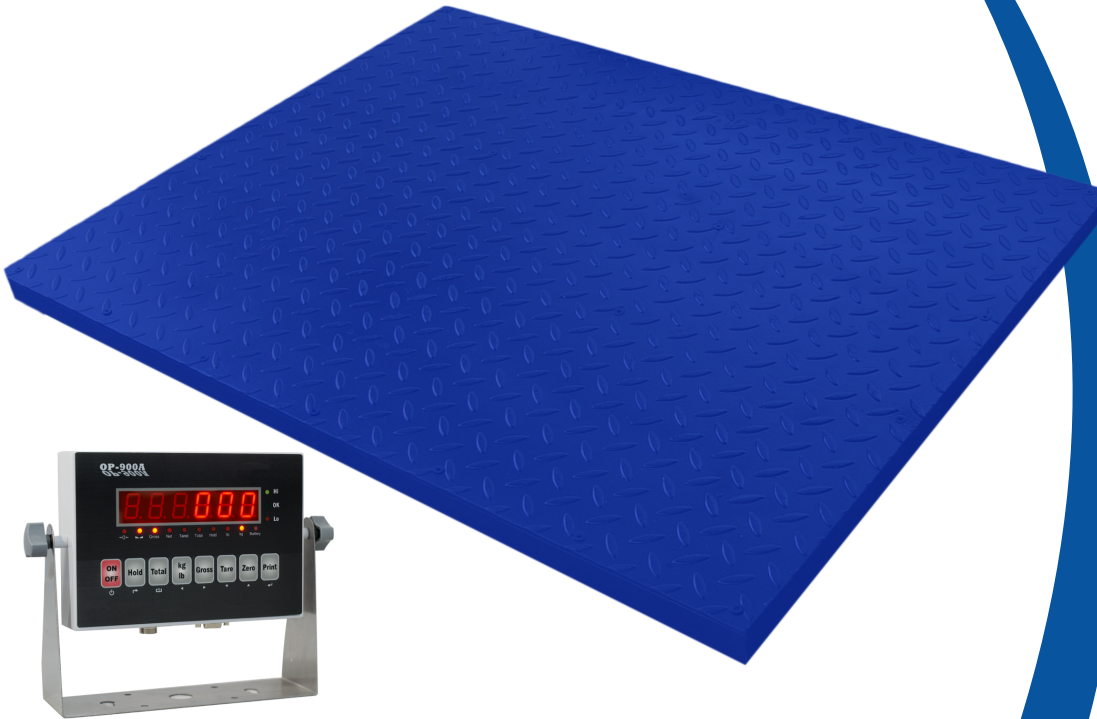

Weighing Technology

A Higher Level of Precision . . . A Higher Level of Performance



TitanF™
Series

| Model | TitanF 5K | TitanF 10K | TitanF 55 5K | TitanF 55 10K |
|-----------------------|--|------------|-----------------|---------------|
| Capacity | 5,000 lb | 10,000 lb | 5,000 lb | 10,000 lb |
| Readability | 1 lb | 2 lb | 1 lb | 2 lb |
| Platform Size | 4' x 4' | 4' x 4' | 5' x 5' | 5' x 5' |
| Weighing Units | lb, kg | | | |
| Functions | net/gross, pre-tare, animal hold, accumulation | | | |
| Power Source | external power adapter (supplied) | | | |
| Connectivity | RS232 bi-directional serial printer output | | | |
| Calibration | Via keyboard (internal adjust switch) | | | |
| Loadcell Excitation | 5V DC ± 5% 60 mA | | | |
| Internal Resolution | 2,000,000 Counts maximum | | | |
| Display Resolution | 5,000 NTEP | | | |
| Display | 1 in high backlit display | | | |
| Operating Environment | 32° F ~ 104° F / 0° C ~ 40° C | | | |
| Construction | Alloy steel base, with steel indicator with stainless steel U-shaped bracket | | | |
| Net Weight | 250 lb / 114 kg | | 320 lb / 145 kg | |
| Shipping Weight | 285 lb / 130 kg | | 350 lb / 159 kg | |
| Approvals | Base: NTEP CoC# 10-081, Indicator: 12-004 | | | |
| Options | Ramp, Scoreboards: 3", 5", 8" High Display. Call for details. | | | |