

Hard Graft.

A commercial collection of two designs built for endurance in general/medium commercial traffic areas. Hard Graft by Belgotex offers a tile and plank in both designs to infuse resilient texture into the modern work environment. The four colourways cover a variety of moody hues that deliver an organic canvas to all things “Cubicool”. What’s that you ask? It’s today’s culture of creating inspiring workspaces that echo the attitude of the business.

Product Information

This commercial collection is available in two designs – Graded is more structured and linear in appearance and Shaded is a dappled

distressed pattern. The palette is mostly tonal across all four colourways giving way to standout décor and furniture pieces.

Graded



Chill



Deep

Shaded



Chill




Deep



Edge



Hype



Edge



Hype

BILL OF QUANTITIES:


- Belgotex HARD GRAFT 50cm x 50cm, 25cm x 100cm and 30cm x 120cm NexBac tiles are manufactured from Stainproof Miracle Fibre (Polypropylene).
- This product is to be laid in accordance with the SANS 10186 fitting code of practice.
- Belgotex HARD GRAFT can be installed in the following directions: 50cm x 50cm can be tessellated, ashlar, brick or random and 30cm x 120cm can be ashlar or herringbone.
- Belgotex recommends the use of carpet protector mats where castor wheels are used.



Hard Graft | Graded & Shaded | Hype

Extended Specifications

Construction	Tufted Multi Scroll Loop Pile
Product Description	Medium Commercial PP Tufted Loop Pile Bitumen Tile
Yarn Type	Stainproof Miracle Fibre (Polypropylene)
Recycled Content	Backing (NexBac Eco/EcoBac (EOS) on request only)
Use Classification	General/Medium Commercial
Total Thickness	2.5mm to 5.5mm (±0.5mm)
Pile Height	±7mm
Total Mass	±4090g/m ² ***
Standard Size	50cm x 50cm and 25cm x 100cm***
Machine Gauge	1/10"
Stitches	39
Fire Index	2 (SANS 10177-IV)
Colour Fastness To:	
i) Light	7 (ISO 105-B02)
ii) Rubbing	(a) Wet 4-5 (ISO 105-X12) (b) Dry 4-5 (ISO 105-X12)
iii) Water	4-5 (ISO 105-E01)
Electrostatic Propensity	Less than 2.0kV (EN 1307)
Static Control	Permanent
VOC Tested	Pass

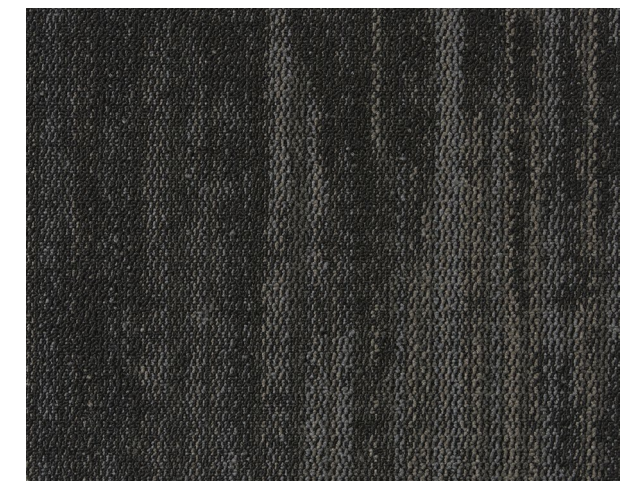

*** Weighted average
*** Also available in 60cm x 60cm, 1m x 50cm, 1m x 1m NexBac tiles and 25cm x 100cm NexBac plank tiles. EcoBac is available on request for 50cm x 50cm and 1m x 1m tiles. As these sizes and backings are not standard, minimum production quantities apply.