

Bella




AGT Bella laminate

Available in AC3/W31 - Square edge

Plank dimensions: 1200 x 193 x 8mm (2.316 sqm/box)

by
FINfloorTM
www.finfloor.co.za

Bella

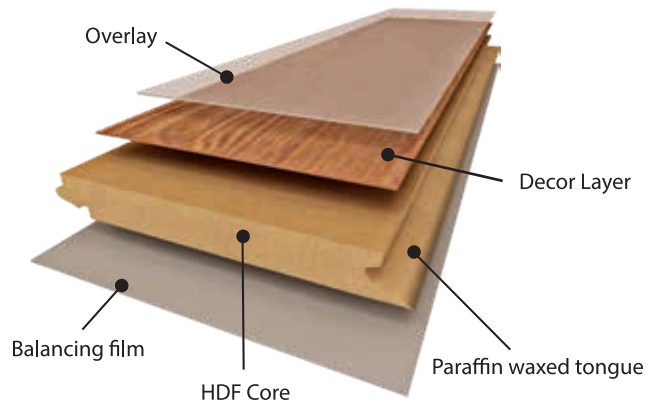

SPECIFICATIONS

AC4/W32 - V4

Top surface	Melamine impregnated decorative film. Protected by anti abrasive overlay.
Core material	H.D.F. (High Density Conifer Fibreboard) impregnated with wax treatment for greater water/moisture resistance. Average core density $\geq 850/880\text{kg/m}^3$
Bottom surface	Balancing film
Plank dimensions	1200 x 193 x 8mm
Installation method	Unilin L2C locking system (Glue-less Installation)
Warranty	10 years heavy residential 5 years moderate commercial use
Fit for use grading	AC3/W31 Heavy Residential AC3/W31 Moderate Commercial

TECHNICAL DATA

AC3/W31 - Square Edge

TEST	STANDARD	CHARACTERISTICS/ RESULTS
Abrasion resistance	EN 438	> 2000 Revolutions
Surface soundness	EN 13329	$S > 1 \text{ N/mm}^2$
Scratch resistance	EN 438	> 3,5
UV resistance	EN ISO105	Level 6 - Blue wool scale (No discolouration)
Impact resistance	EN 13329	IC 1 for Class 31
Effect of a soft castor chair	EN 425	No change or damage on appearance should occur
Effect of soft castor furniture leg	EN 424	No visible damage should occur
Resistance to hot pots	EN 13329	Class 4
Resistance to cigarette burn	EN 13329	Class 4
Resistance to water vapour	EN 13329	Class 4
Fire classification	EN13501-1/EN14041:2004	Flame-retardant - B1
Stain resistance	EN 13329	Class 5
24 hour thickness swelling test	EN 13329	$\leq 18\%$ swelling
Density	EN 323	$850-880 \text{ kg/m}^3$
Static locking strength (Joint strength)	ISO 24334	>590 KG/LM

