


230

TWECO®

2 COMPATIBLE WITH TWECO 200AMP CONSUMABLES

MIG

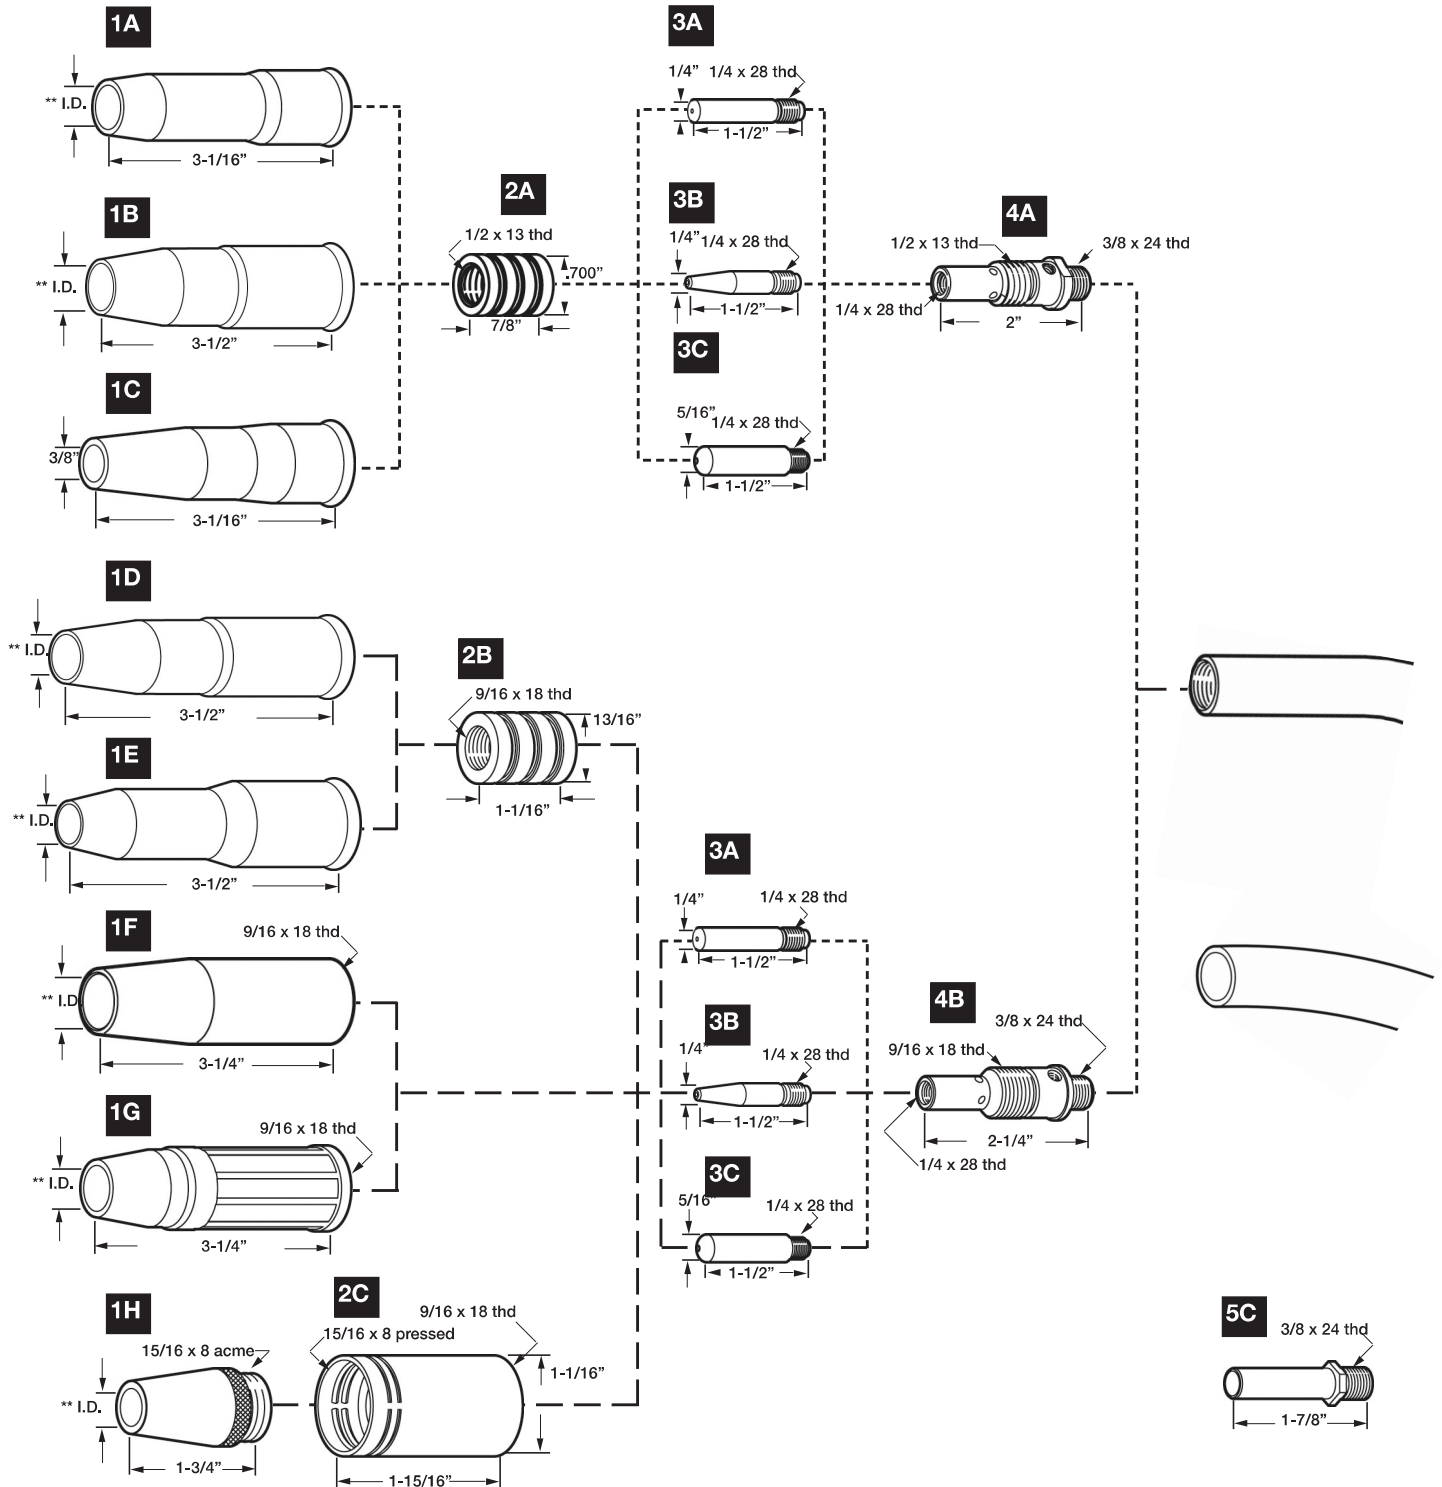

2 COMPATIBLE WITH TWECO 200AMP CONSUMABLES

MIG

1. NOZZLES

I.D.

			I.D.
A	22-50	Nozzle Adjustable	1/2" (12.7mm)
	22-62	Nozzle Adjustable	5/8" (15.9mm)
B	22-37-SS	Nozzle Adj. Short Stop	3/8" (09.5mm)
	22-50-SS	Nozzle Adj. Short Stop	1/2" (12.7mm)
	22-62-SS	Nozzle Adj. Short Stop	5/8" (15.9mm)
C	24T-37-SS	Nozzle Adj. Tapered S.S.	3/8" (09.5mm)
D	24A-50	Nozzle Adjustable	1/2" (12.7mm)
	24A-62	Nozzle Adjustable	5/8" (15.9mm)
	24A-75	Nozzle Adjustable	3/4" (19.1mm)
E	24A-37-SS	Nozzle Adj. Short Stop	3/8" (09.5mm)
	24A-50-SS	Nozzle Adj. Short Stop	1/2" (12.7mm)
	24A-62-SS	Nozzle Adj. Short Stop	5/8" (15.9mm)
	24A-75-SS	Nozzle Adj. Short Stop	3/4" (19.1mm)
	24AT-37-SS	Nozzle Adj. Tapered S.S.	3/8" (09.5mm)
F	23-37	Nozzle Insulated	3/8" (09.5mm)
	23-50	Nozzle Insulated	1/2" (12.7mm)
	23-62	Nozzle Insulated	5/8" (15.9mm)
	23-75	Nozzle Insulated	3/4" (19.1mm)
	23H-50	Nozzle Insulated H.D.	1/2" (12.7mm)
	23H-62	Nozzle Insulated H.D.	5/8" (15.9mm)
	23H-75	Nozzle Insulated H.D.	3/4" (19.1mm)
	23T-37	Nozzle Insulated Tapered	3/8" (09.5mm)
G	23-37-F	Nozzle Insulated Flush	3/8" (09.5mm)
	23-50-F	Nozzle Insulated Flush	1/2" (12.7mm)
	23-75-F	Nozzle Insulated Flush	3/4" (19.1mm)
	23T-37-F	Nozzle Insul. Tapered Flush	3/8" (09.5mm)
H	24CT-37-S	Nozzle Coarse Thread	3/8" (09.5mm)
	24CT-50-S	Nozzle Coarse Thread	1/2" (12.7mm)
	24CT-62-S	Nozzle Coarse Thread	5/8" (15.9mm)
	24CT-75-S+	Nozzle Coarse Thread	3/4" (19.1mm)

2. INSULATORS

A	32	Insulator (#2) for Adjustable Nozzles
B	34A	Insulator (#2,3,4) for Adjustable Nozzles
C	34CT	Insulator (#2,3,4) for Coarse Threaded Nozzles
D	34FN	Insulator (#2,3,4) for Fine Threaded Nozzles

3. CONTACT TIPS

ID

A	14-23	Contact Tip	.023	(0.6mm)	.028
	14-30	Contact Tip	.030	(0.8mm)	.037
	14-35	Contact Tip	.035	(0.9mm)	.043
	14-40	Contact Tip	.040	(1.0mm)	.048
	14-45	Contact Tip	.045	(1.2mm)	.055
	14-52	Contact Tip	.052	(1.3mm)	.063
	14A-364	Contact Tip	3/64	Al. (1.2mm)	.059
B	14T-23	Contact Tip Tapered	.023	(0.6mm)	.028
	14T-30	Contact Tip Tapered	.030	(0.8mm)	.037
	14T-35	Contact Tip Tapered	.035	(0.9mm)	.043
	14T-40	Contact Tip Tapered	.040	(1.0mm)	.048
	14T-45	Contact Tip Tapered	.045	(1.2mm)	.055
C	14H-30	Contact Tip H.D.	.030	(0.8mm)	.037
	14H-35	Contact Tip H.D.	.035	(0.9mm)	.043
	14H-40*	Contact Tip H.D.	.040	(1.0mm)	.048
	14H-45*	Contact Tip H.D.	.045	(1.2mm)	.055
	14AH-364*	Contact Tip H.D.	3/64	Al. (1.2mm)	.059
	14AH-116*	Contact Tip H.D.	1/16	Al. (1.6mm)	.081

4. GAS DIFFUSERS

A	52	Gas Diffuser (#2)	
	52-23	Gas Diffuser (#2)	.023
B	52FN	Gas Diffuser (#2)	

5. CONDUCTOR TUBES

A	62A-45	Conductor Tube 45°
	62A-60	Conductor Tube 60°
	62A-80	Conductor Tube 80°
	62A-180	Conductor Tube 180°
B	72A	Conductor Tube Insulation
C	64N	Nipple

+Available with spatter resistant coating (-C)

*Available in Long Lasting (LL)